


BEVERLY

metal cutting shears


**SAVE
TIME...
LABOR...
MATERIALS**



**PNEUMATIC
SHEAR**



**SHEAR
FLOOR STAND**




**SLITTING
SHEAR**

- ★ Most advanced line of shears made
- ★ Designed for fast, easy operation
- ★ Precision made—reasonably priced

CUT ANY SHAPE WITH A BEVERLY throatless shear

THE B-3

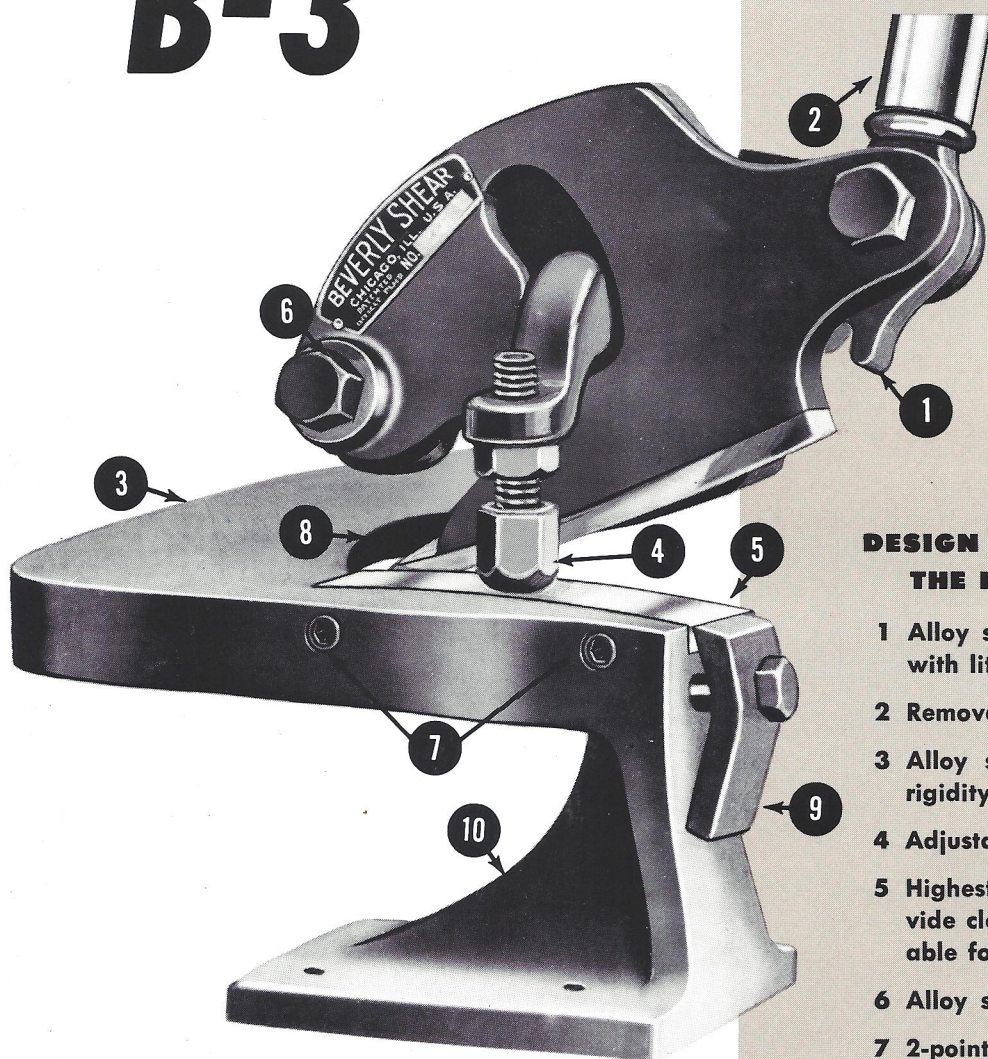


MODEL B-3

Capacity $\frac{3}{16}$ " mild steel, 10 gauge stainless. Equipped with High Carbon High Chrome Blades.

Weight	58 lbs.
Width	9"
Height less handle	15"
Handle	30"
Depth	14"
Lower Blade Length	5 $\frac{3}{8}$ "
Length of Cut	4 $\frac{1}{4}$ "

MAKE CUTS
LIKE THESE ON
A BEVERLY
QUICKLY ...
EASILY ...
ACCURATELY

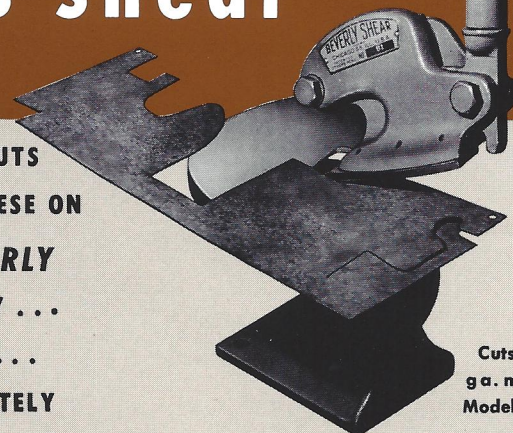


Cuts made in 18
ga. metal with
Model B-1 Shear.

Beverly Throatless Shears are ideal all-purpose metal cutting tools because they permit any desired cut in heavy gauges, yet handle lighter metals without distortion. Unique shoulder design allows work to be turned in any position during the cut. Geared rack and pinion makes heavy metal cutting easy. Upper and lower blades are positioned to provide a clean, knurl-free cut, regardless of material.

DESIGN AND OPERATING FEATURES OF THE BEVERLY THROATLESS SHEAR


- 1 Alloy steel rack and pinion gives great power with little effort.
- 2 Removable handle for easy portability.
- 3 Alloy steel body designed to give maximum rigidity and strength.
- 4 Adjustable hold down (B-3 only)
- 5 Highest grade blades have correct rake to provide clean, burr-free cutting. Blades are adjustable for wear and are quickly interchangeable.
- 6 Alloy steel pivot point.
- 7 2-point lower blade adjustment.
- 8 Exclusive design of shoulder permits turning work to any shape or position.
- 9 Lower blade retaining clamp is keyed to keep blades tight and rigid.
- 10 Steel base drilled for mounting Shear on Stand or bench.

"Shear it Cleverly we

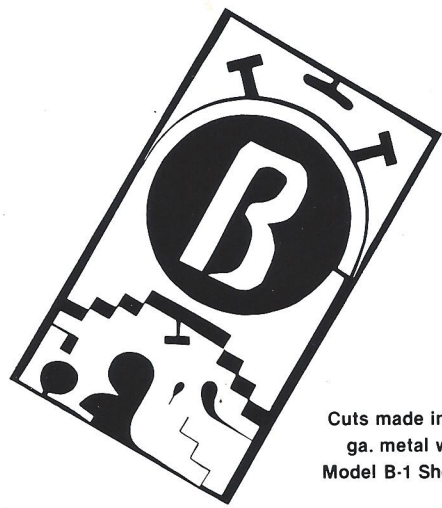

Cuts made in 18 ga. metal with Model B-1 Shear.


BEVERLY model B-1

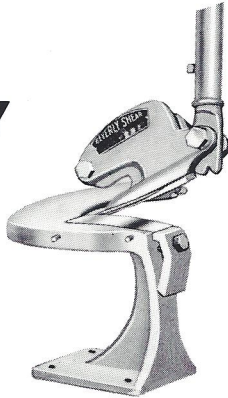

Capacity: 14 gauge mild; 18 gauge stainless.

Weight	18 lbs.
Height less handle	14"
Handle	18"
Width	7"
Depth	9"
Lower Blade Length	4 1/4"
Length of Cut	3"

BEVERLY model B-2

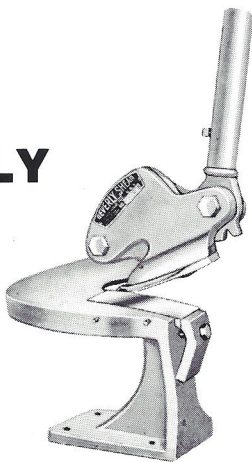


Capacity: 10 gauge mild; 14 gauge stainless.

Weight	35 lbs.
Height less handle	15"
Handle	24"
Width	9"
Depth	10"
Lower Blade Length	4 3/8"
Length of Cut	3 1/8"

BEVERLY

Pneumatic Shear

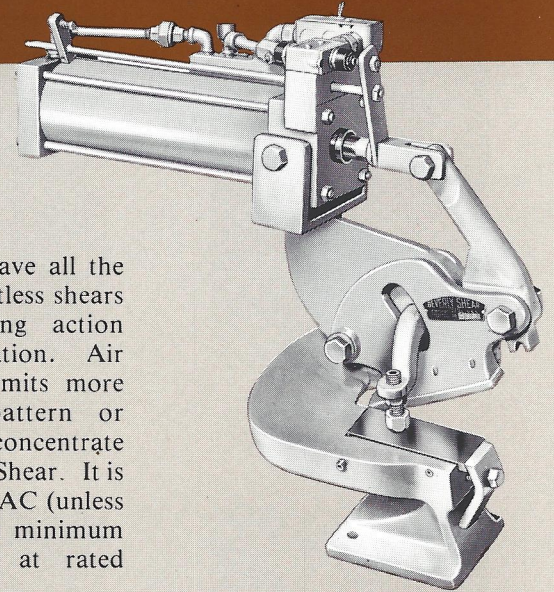

Beverly Pneumatic Shears have all the advantages of Beverly Throatless shears plus fast, effortless cutting action through air cylinder operation. Air operation speeds work, permits more accurate cutting to a pattern or template, as operator can concentrate on guiding work through the Shear. It is activated by 115 V 60 Cycle AC (unless otherwise requested), with a minimum of 105 PSI air pressure at rated capabilities per unit.


Flow Control Valves govern the forward and return stroke speed of the Shear. Any combination of power and return stroke speeds may be obtained by simple adjustments of the Valves. Length of stroke may be adjusted by positioning actuating arm where desired. Efficient muffler makes operation virtually noiseless. Foot switch permits operator to use both hands in guiding work: steady pressure on Switch keeps Shear moving through cutting cycle continuously—releasing pressure instantly returns Shear to starting position.

Specifications	PBB3	PB 3	PB6
Shearing Capacity			
50,000 PSI Tensile (Mild Steel)	3/16"	3/16"	5/16"
Stainless Steel	10 gauge	10 gauge	1/4"
Height	24"	24"	28 1/2"
Width	14"	14"	15 1/2"
Depth	25"	25"	29"
Lower Blade Length	5 5/8"	5 5/8"	5 5/8"
Length of Cut	4 1/4"	4 1/4"	4 1/4"
Approx. Shipping Weight	115 lbs.	125 lbs.	155 lbs.

BEVERLY SS series slitting shear


Beverly SS Series Slitting Shears, made in 2 sizes to handle 10 ga. and 3/16" mild steel, incorporate the most advanced design features to provide maximum cutting capacity with minimum size and weight. Compounded linkage provides easy cutting action in heaviest metals. Rigid, strongly braced frame holds upper and lower blades in perfect alignment to assure clean cutting action. Equipped with high carbon, high chrome blades.

Specifications	SS-2	SS-3
Slitting Capacity (mild steel)	10 ga.	3/16"
Trimming Capacity (mild steel)	3/16"	1/4"
Bar Capacity	3/16" x 2"	1/4" x 2"
Stainless Steel	14 ga.	10 ga.
Weight	10 1/2 lbs.	25 lbs.
Height	8" less 20" handle	13" less 30" handle
Depth	8"	11"
Blade Length	3 1/2"	4 1/4"
Length of Cut	2 1/2"	2 1/2"

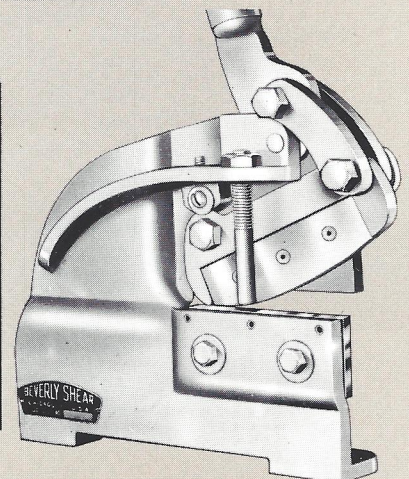


h a Beverly"

USES OF BEVERLY SHEARS

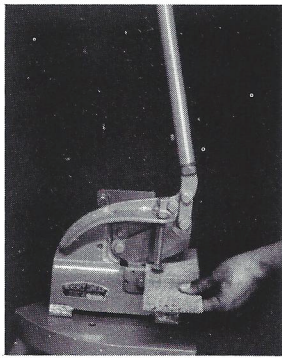


SS2 Shear; shown cutting stainless steel mesh material.

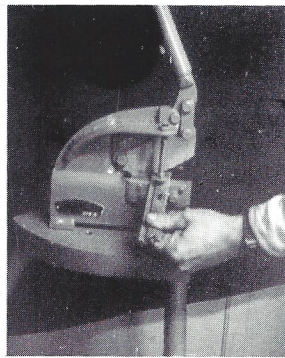

SS2 Shear; modified lower blade and frame; shown here cutting a formed slide bar.




B-1 Beverly Shear; set to cut 1/4" flat braided ground cable ends and or to length.

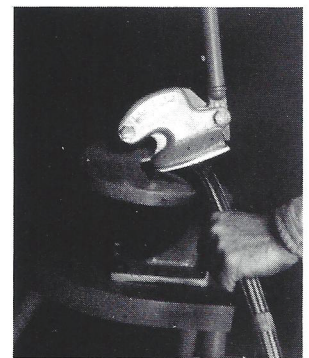

B-1 Beverly Shear; set to cut braided stock and/or braided covered hose to length and/or for end fittings.




SS2 Shear; modified upper blade and frame; shown cutting nail plate stock to length or shapes for truss manufacture or other joining of wooden, etc. parts.



SS2 Shear; modified with square cut device and adjustable depth stop; shown cutting band saw blade stock to make saw blades to length before weld/or brazing ends.



Beverly Shear Series; zig-zag cuts are easily made on a throatless shear because movement of the work is unhampered by a throat or center post.



SS Slitting Series Shears are used primarily for making straight cuts. The Beverly SS-3 illustrated is making a cut in 1/4 in. x 2 in. bar stock. An adjustable hold-down keeps material flat during the cut.

WHAT UNIQUE USE DO YOU HAVE FOR A BEVERLY

BEVERLY shear floor stand

The Beverly Shear Floor Stand was developed to meet the need for a rigid base which would occupy little floor space and bring any Beverly Shear to the most efficient operating position. Mounted on the Stand, a Shear is accessible from all sides and the work can be seen from any angle. All steel welded construction and tripod design makes the Stand an ideal mount for other machines or tools as well. The base is drilled to receive a Shear or Slitter, but can be furnished blank for mounting any other machine or tool.

1. Steel base furnished drilled for any Beverly Shear.
2. Tubular steel legs . . . light, yet strong.
3. Tripod design provides maximum stability.

When ordering, please specify whether the Stand is to be used with a Beverly Throatless Shear or the Slitting Shear Model.

Specifications

Weight	25 lbs.
Height overall	30"
Front leg spread	20"
Distance Front to Back Leg	28"
Table Top	7" x 11"
Floor Space Required	24" x 30"



DISTRIBUTED BY