


SPECIFICATIONS



Cincinnati

DIAL TYPE
MILLING MACHINES

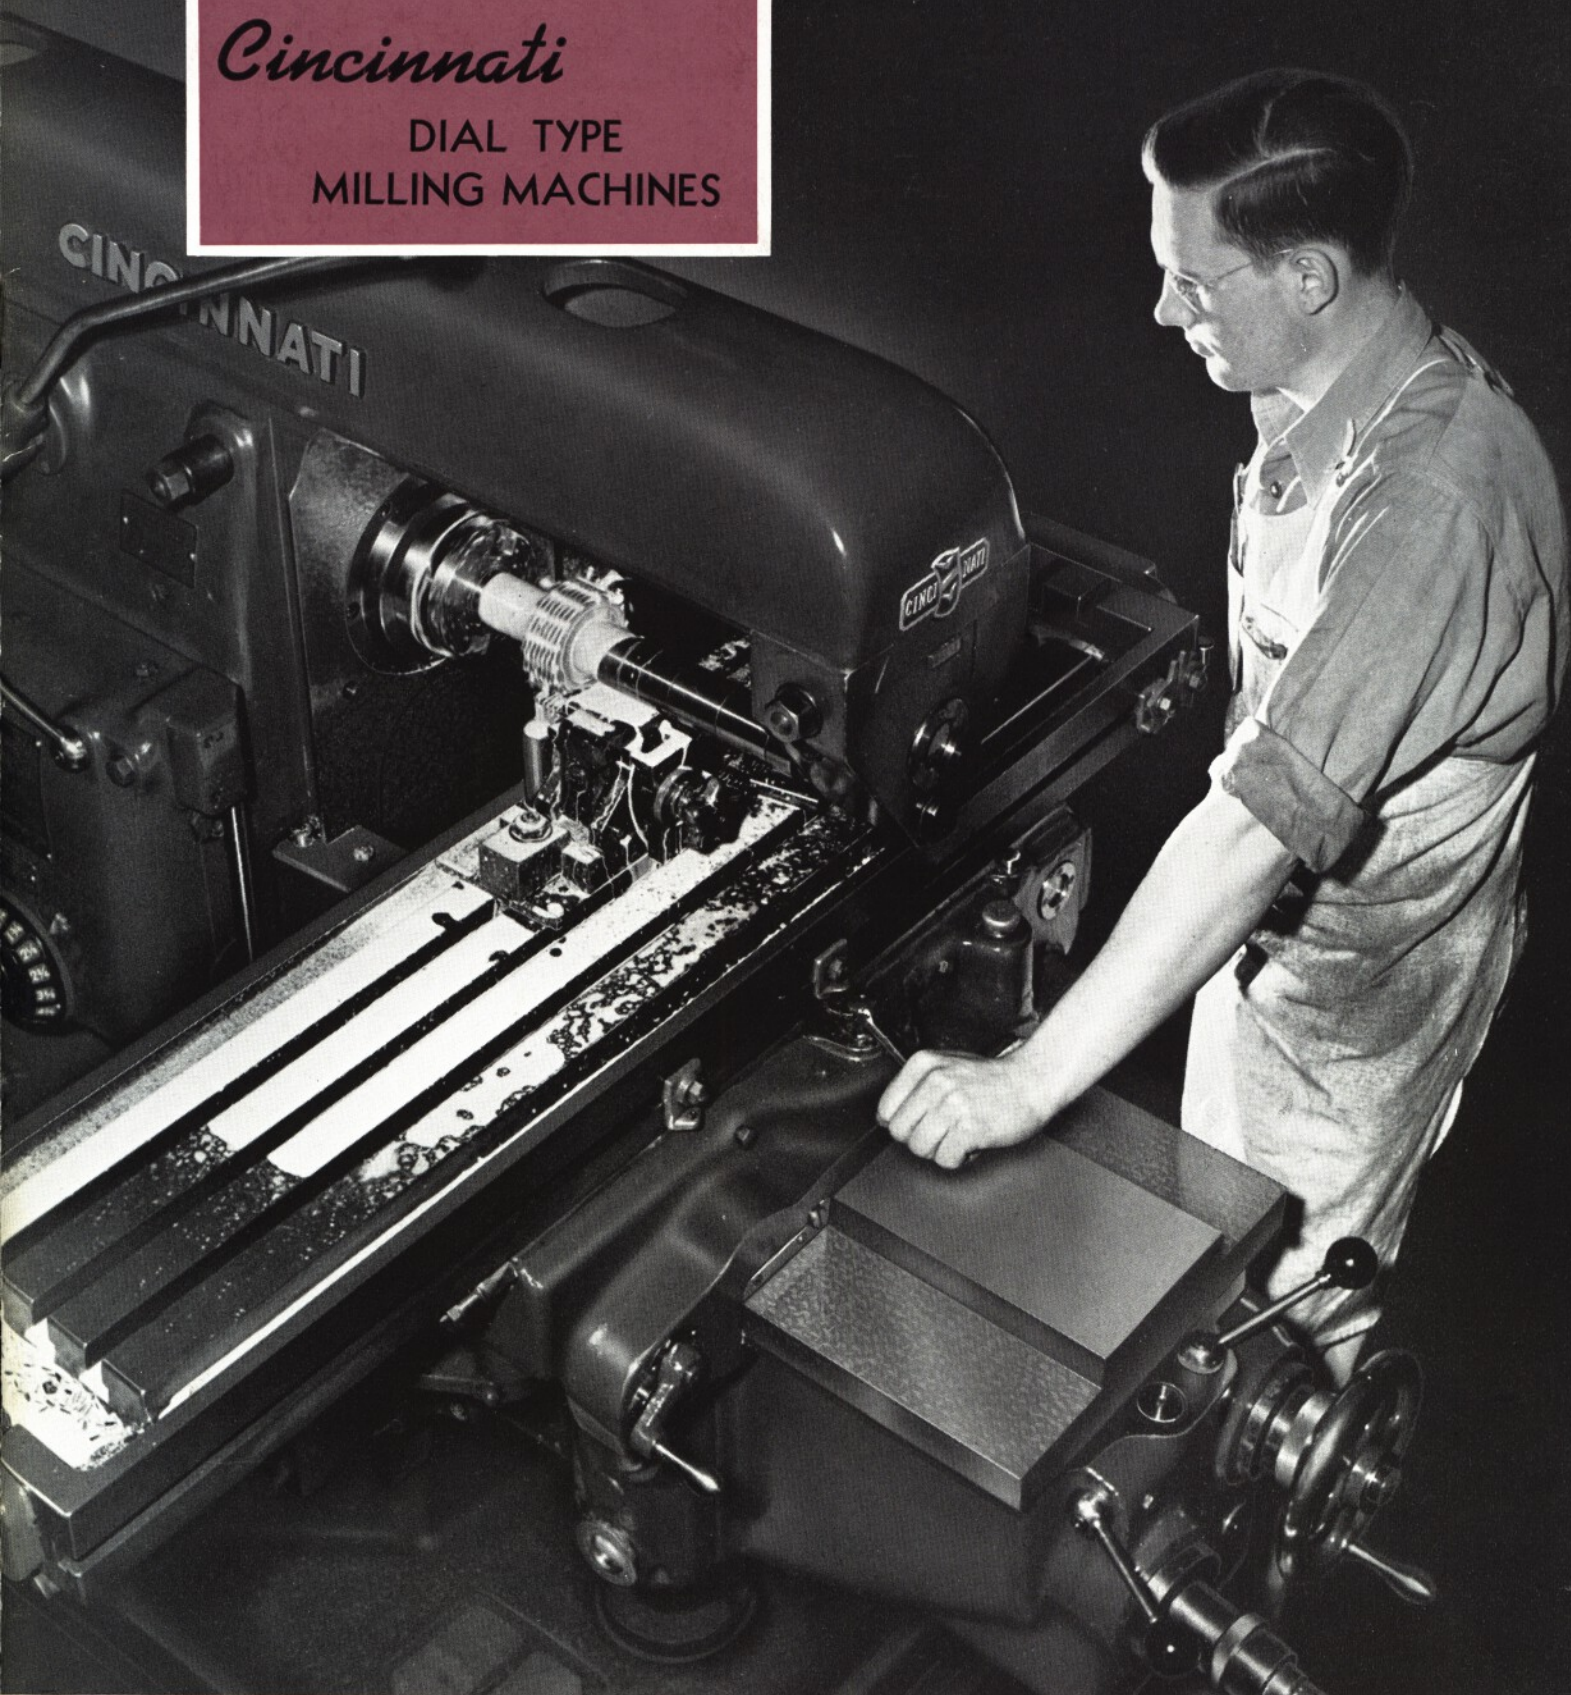

THE CINCINNATI MILLING MACHINE CO., CINCINNATI, OHIO, U. S. A.

Copyright 1941—The Cincinnati Milling Machine Co.



Cincinnati

DIAL TYPE MILLING MACHINES


Built in Three Sizes
Nos. 2, 3 and 4

•

Three Styles—Plain, Universal
and Vertical


•

Medium Speed and
High-Speed

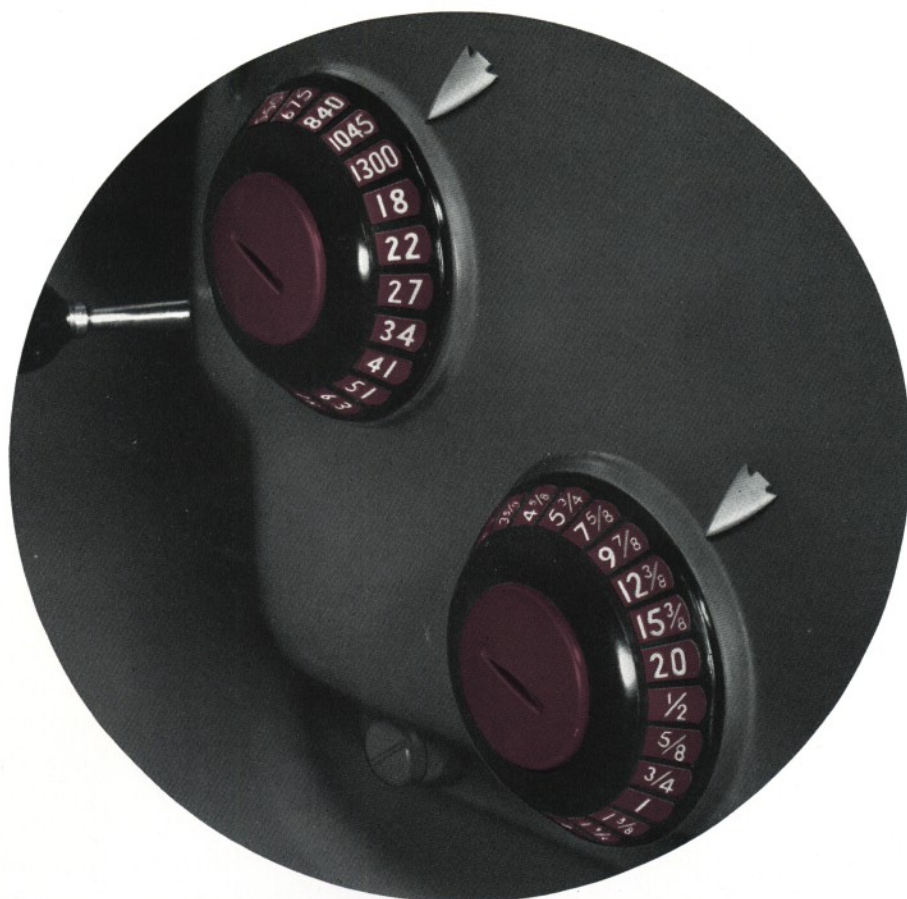


- CINCINNATI Dial Type Milling Machines, briefly illustrated and described in this booklet, offer possibilities for more profitable milling operations in metal working shops of almost any size. Here are the ways in which the Dial Types will help your shop:
- They're quickly set up; more producing hours available during the day; less nonproductive hours required for setting up different jobs.
- They're easy to operate; and that means the elimination of production lag towards the end of the day. It means a higher daily production with no increase in labor or overhead costs; wider latitude in the physical abilities of your milling machine operators; more satisfied operators.
- They have adequate spindle speeds and feeds for milling a wide variety of materials.
- They're accurate, not only as a fine machine but also in producing your milled parts more accurately. When the work is adjusted to the cutter, the depth of cut equals the adjustment; no more or no less.
- They're durable, and they take heavy cuts without a whimper. They're built for this kind of work, and when production is needed most, they're on the job.

This document was scanned in an effort to preserve and spread the knowledge contained within. It is not meant to be resold individually or within a collection of documents.

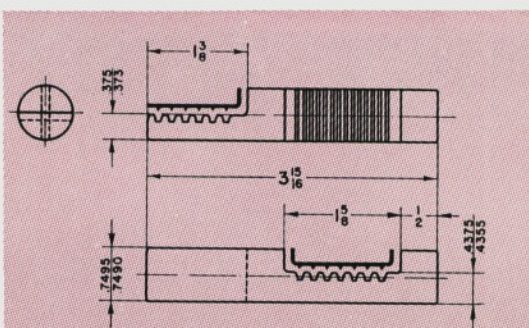


COVER ILLUSTRATION


A four-operation job of milling two flats and two sets of rack teeth on rear control racks. (Sketch of the part shown here.) Production rate for first and second operations about 30 per hour, for third and fourth operations, about 35 per hour.

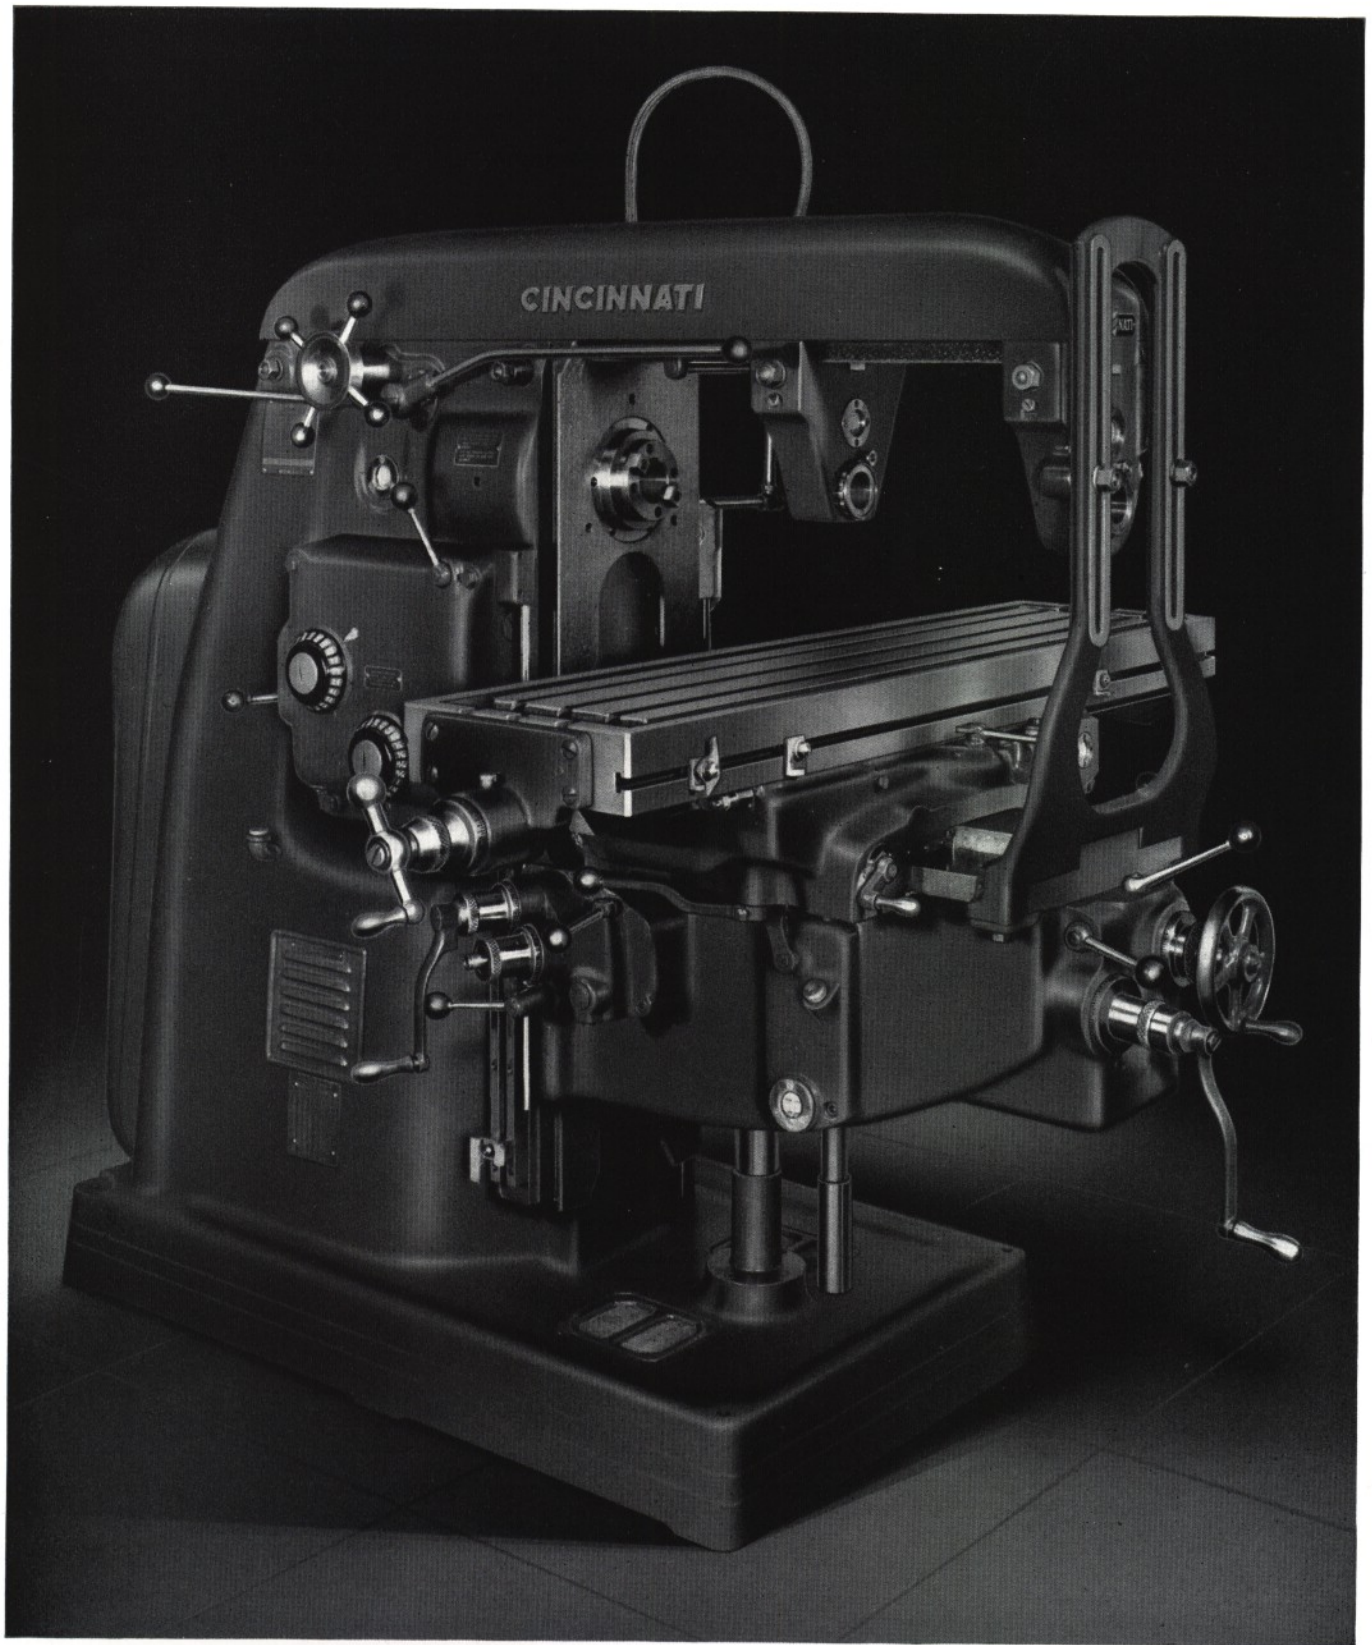


CINCINNATI No. 3 PLAIN HIGH-SPEED DIAL TYPE

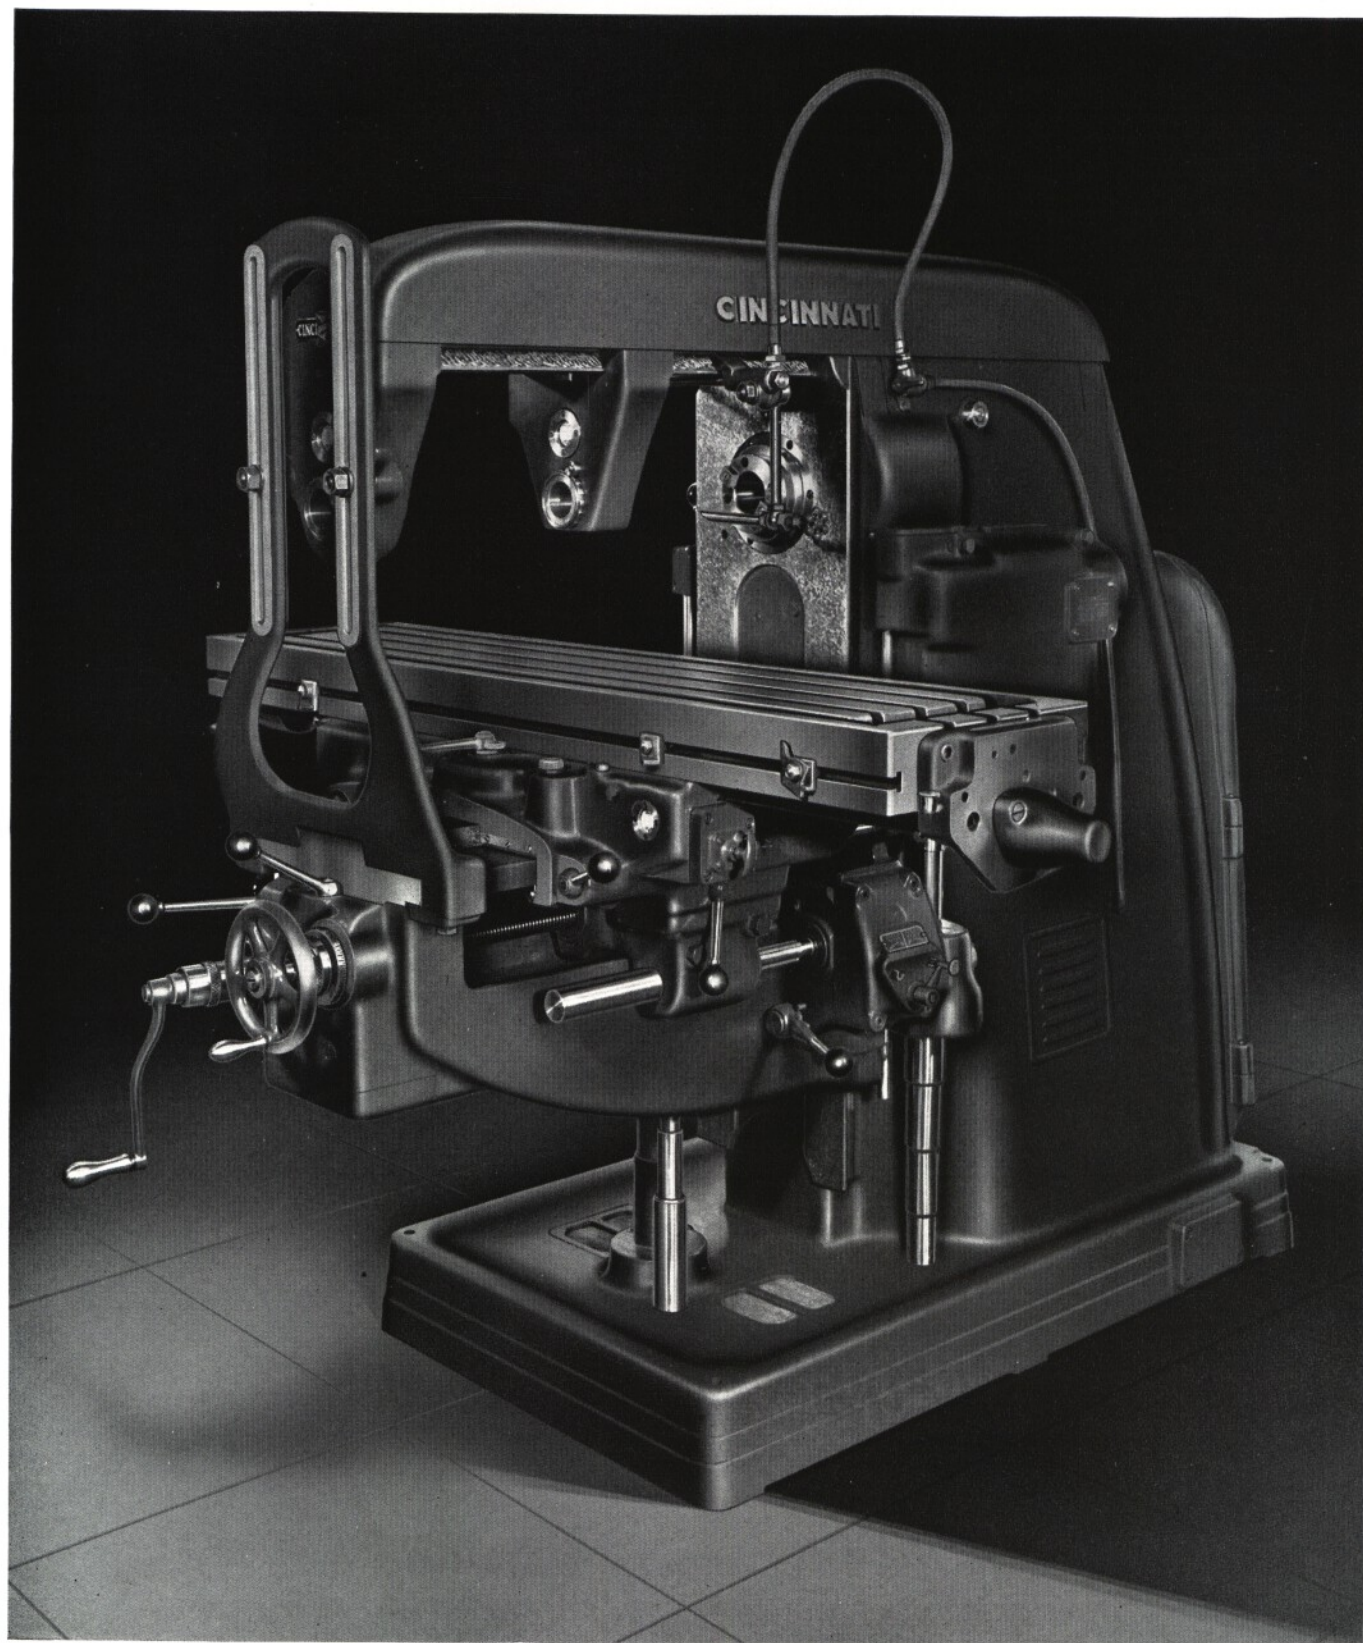


CININNATI No. 3 PLAIN HIGH-SPEED DIAL TYPE

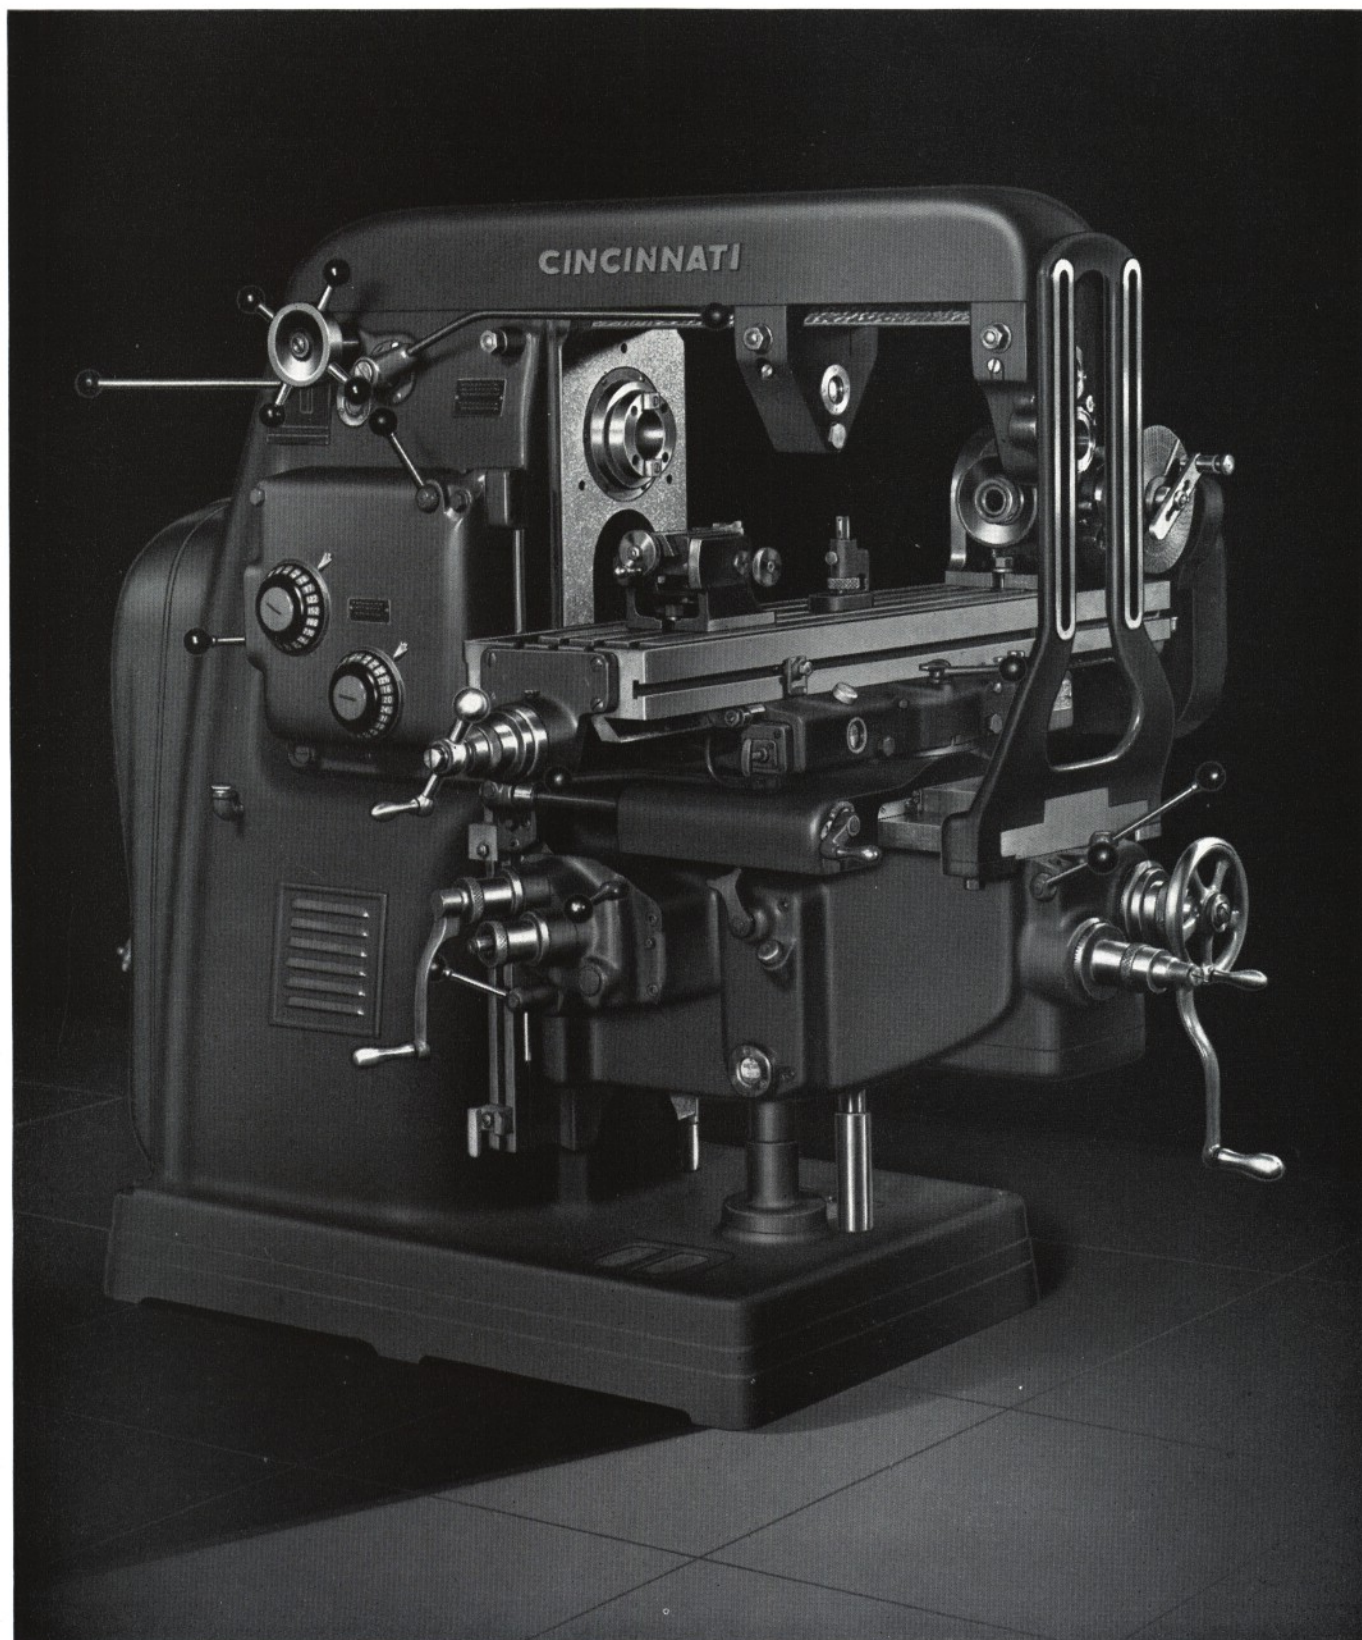


CINCINNATI No. 2 UNIVERSAL HIGH-SPEED DIAL TYPE

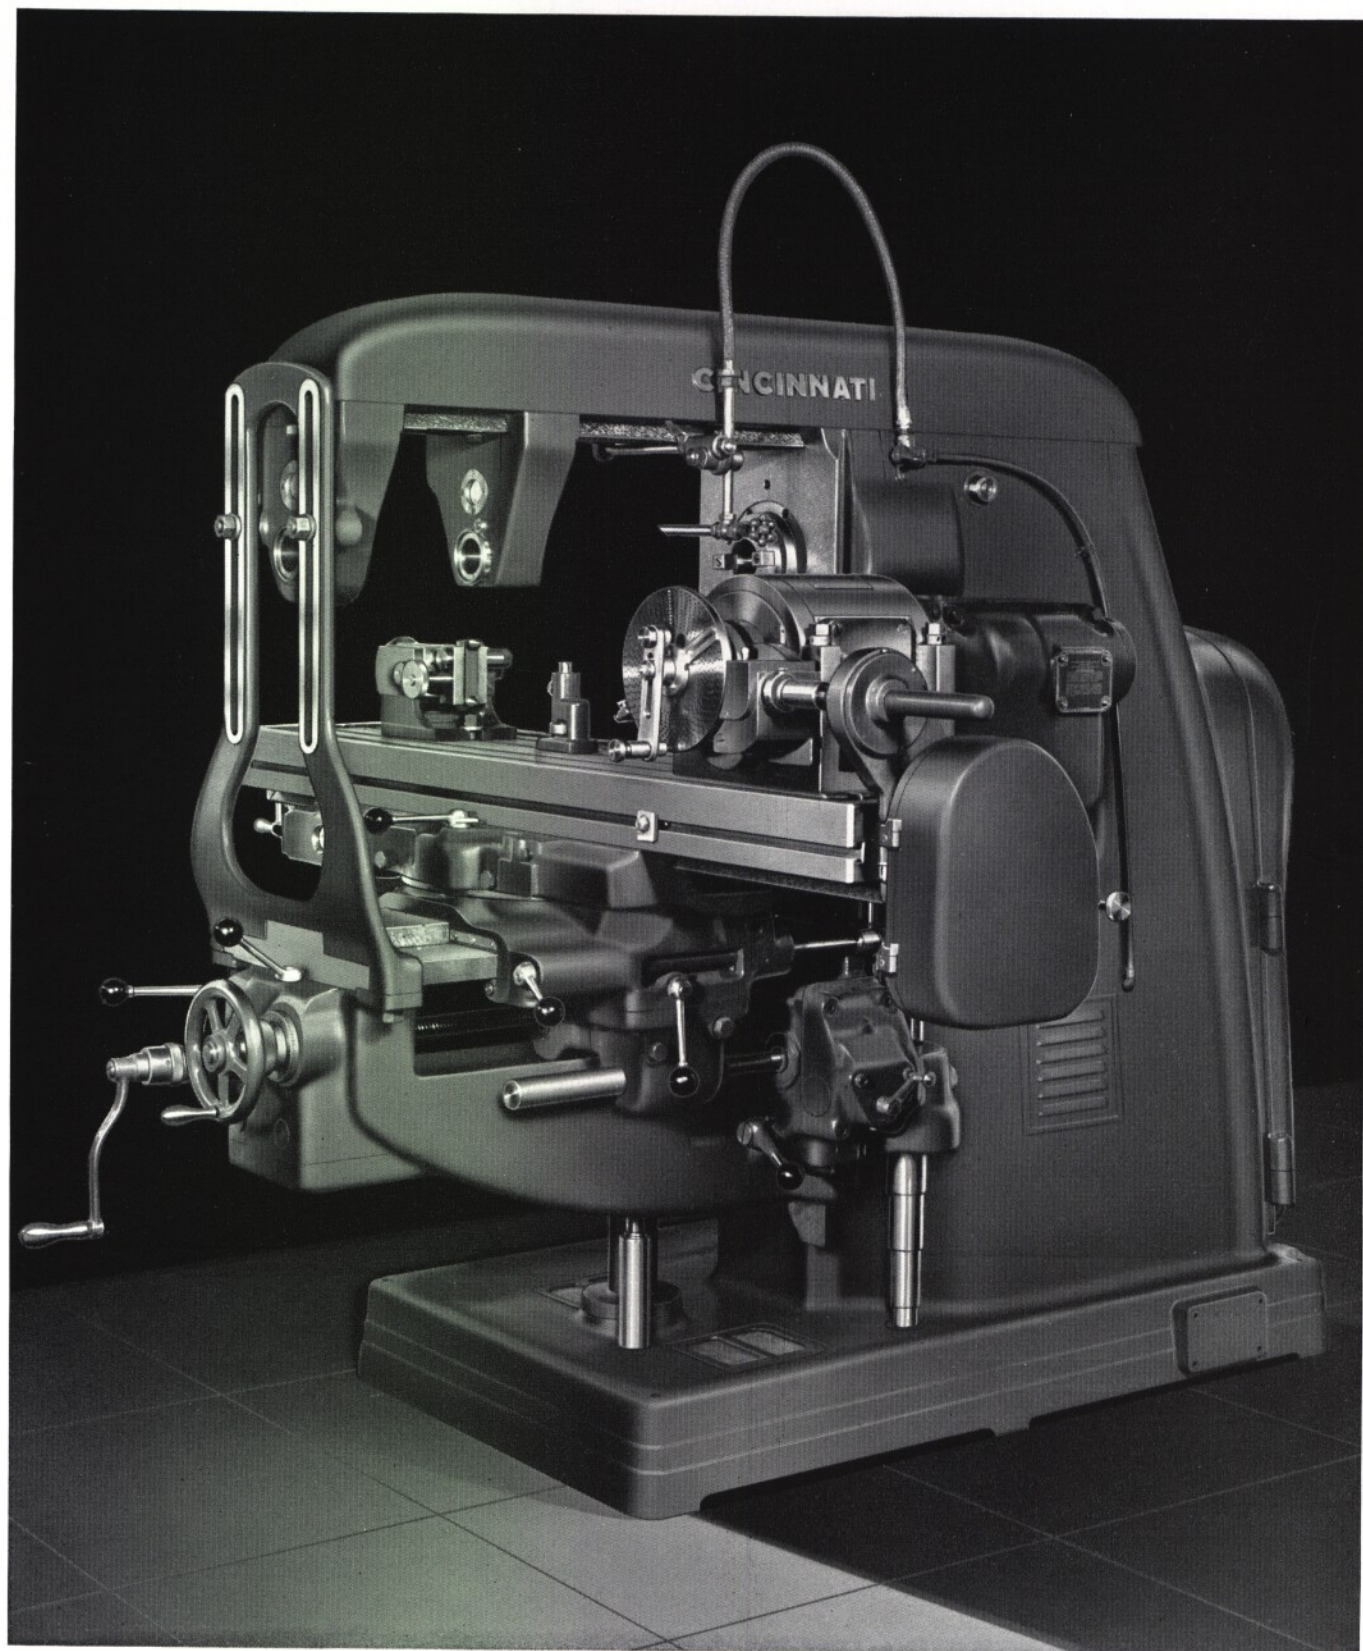

CINCINNATI No. 3 UNIVERSAL HIGH-SPEED DIAL TYPE

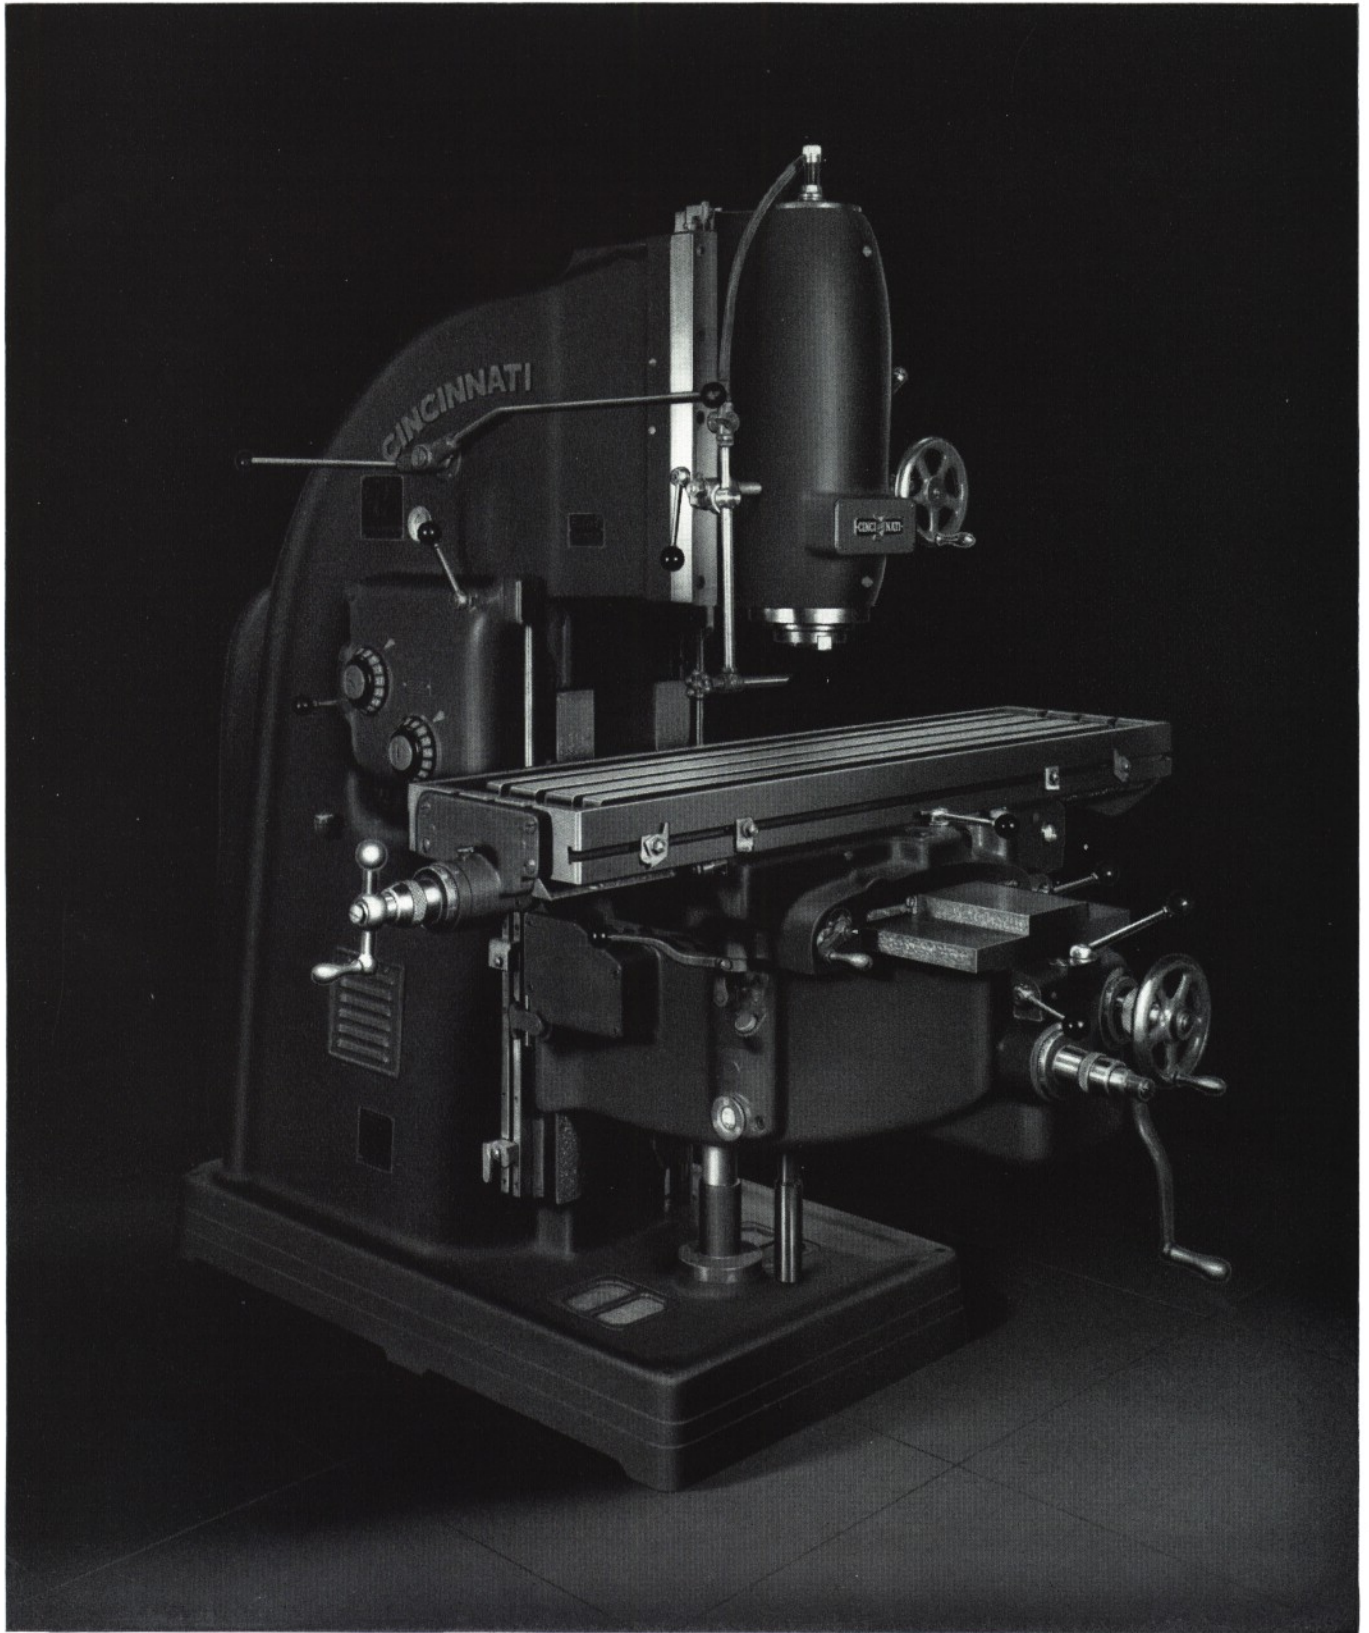

CINCINNATI No. 3 VERTICAL HIGH-SPEED DIAL TYPE

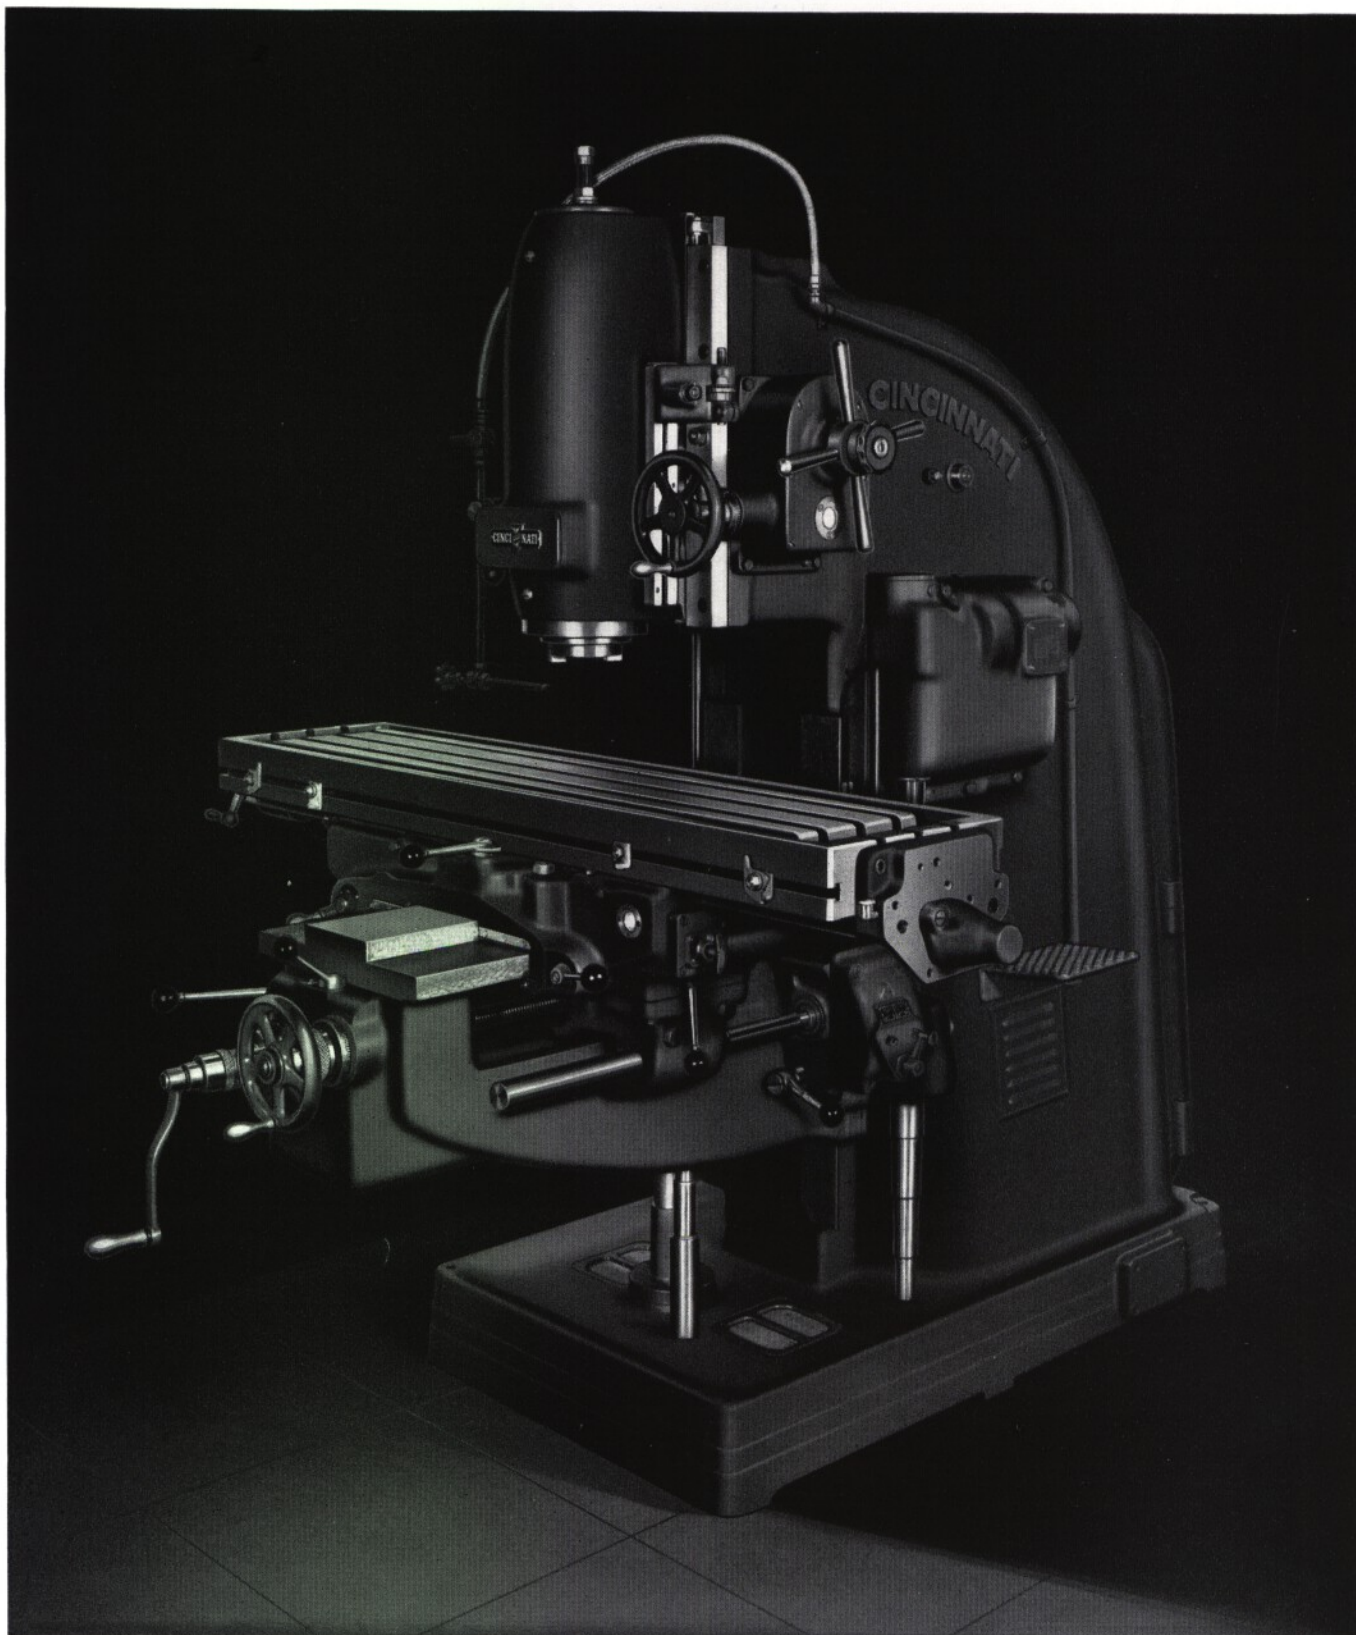


CINCINNATI No. 3 VERTICAL HIGH-SPEED DIAL TYPE

HIGHLIGHTS OF DESIGN

and Accruing Benefits

- 1. Power Speed and Feed Changes At Front and Rear Working Positions.** Controlled with single lever. Without walking, speeds and feeds may be changed to suit the job and cut.
- 2. High Spindle Speeds and Feeds.** Many kinds of materials, from tough steel to aluminum, may be milled at correct speeds and feeds. (Medium speed machines also available.)
- 3. Power Feeds: Longitudinal, Cross, Vertical.** Engaged by single independent, directional controls; simplify operation for new men.
- 4. Duplicate Set Of Control Levers At Operator's Rear Working Position.** When work-piece obscures cutter, operator may manipulate machine from rear of table; reduces spoilage.
- 5. Power Rapid Traverse: Longitudinal, Cross, Vertical.** Minimizes "cutting air"; saves time.
- 6. Power Feed and Power Rapid Traverse To Vertical Head.** May be obtained for vertical machines. Handy for die work, boring, etc.
- 7. Touch-Control Starting and Stopping.** Light touch of starting lever, front or rear, starts or stops spindle drive. Hydraulic mechanism engages clutch spool, relieving operator of majority of starting and stopping effort.
- 8. Smooth, Streamlined Design.** Easy to keep clean.
- 9. Pull-Out Quick-Adjusting Micrometer Dials.** Easy to set for hand adjustments; no thumbscrews to lose.
- 10. Light Aluminum Alloy Arbor Supports.** Easy to remove or replace.

**TURN TO PAGE 12 FOR
NINE ADDITIONAL HIGHLIGHTS**

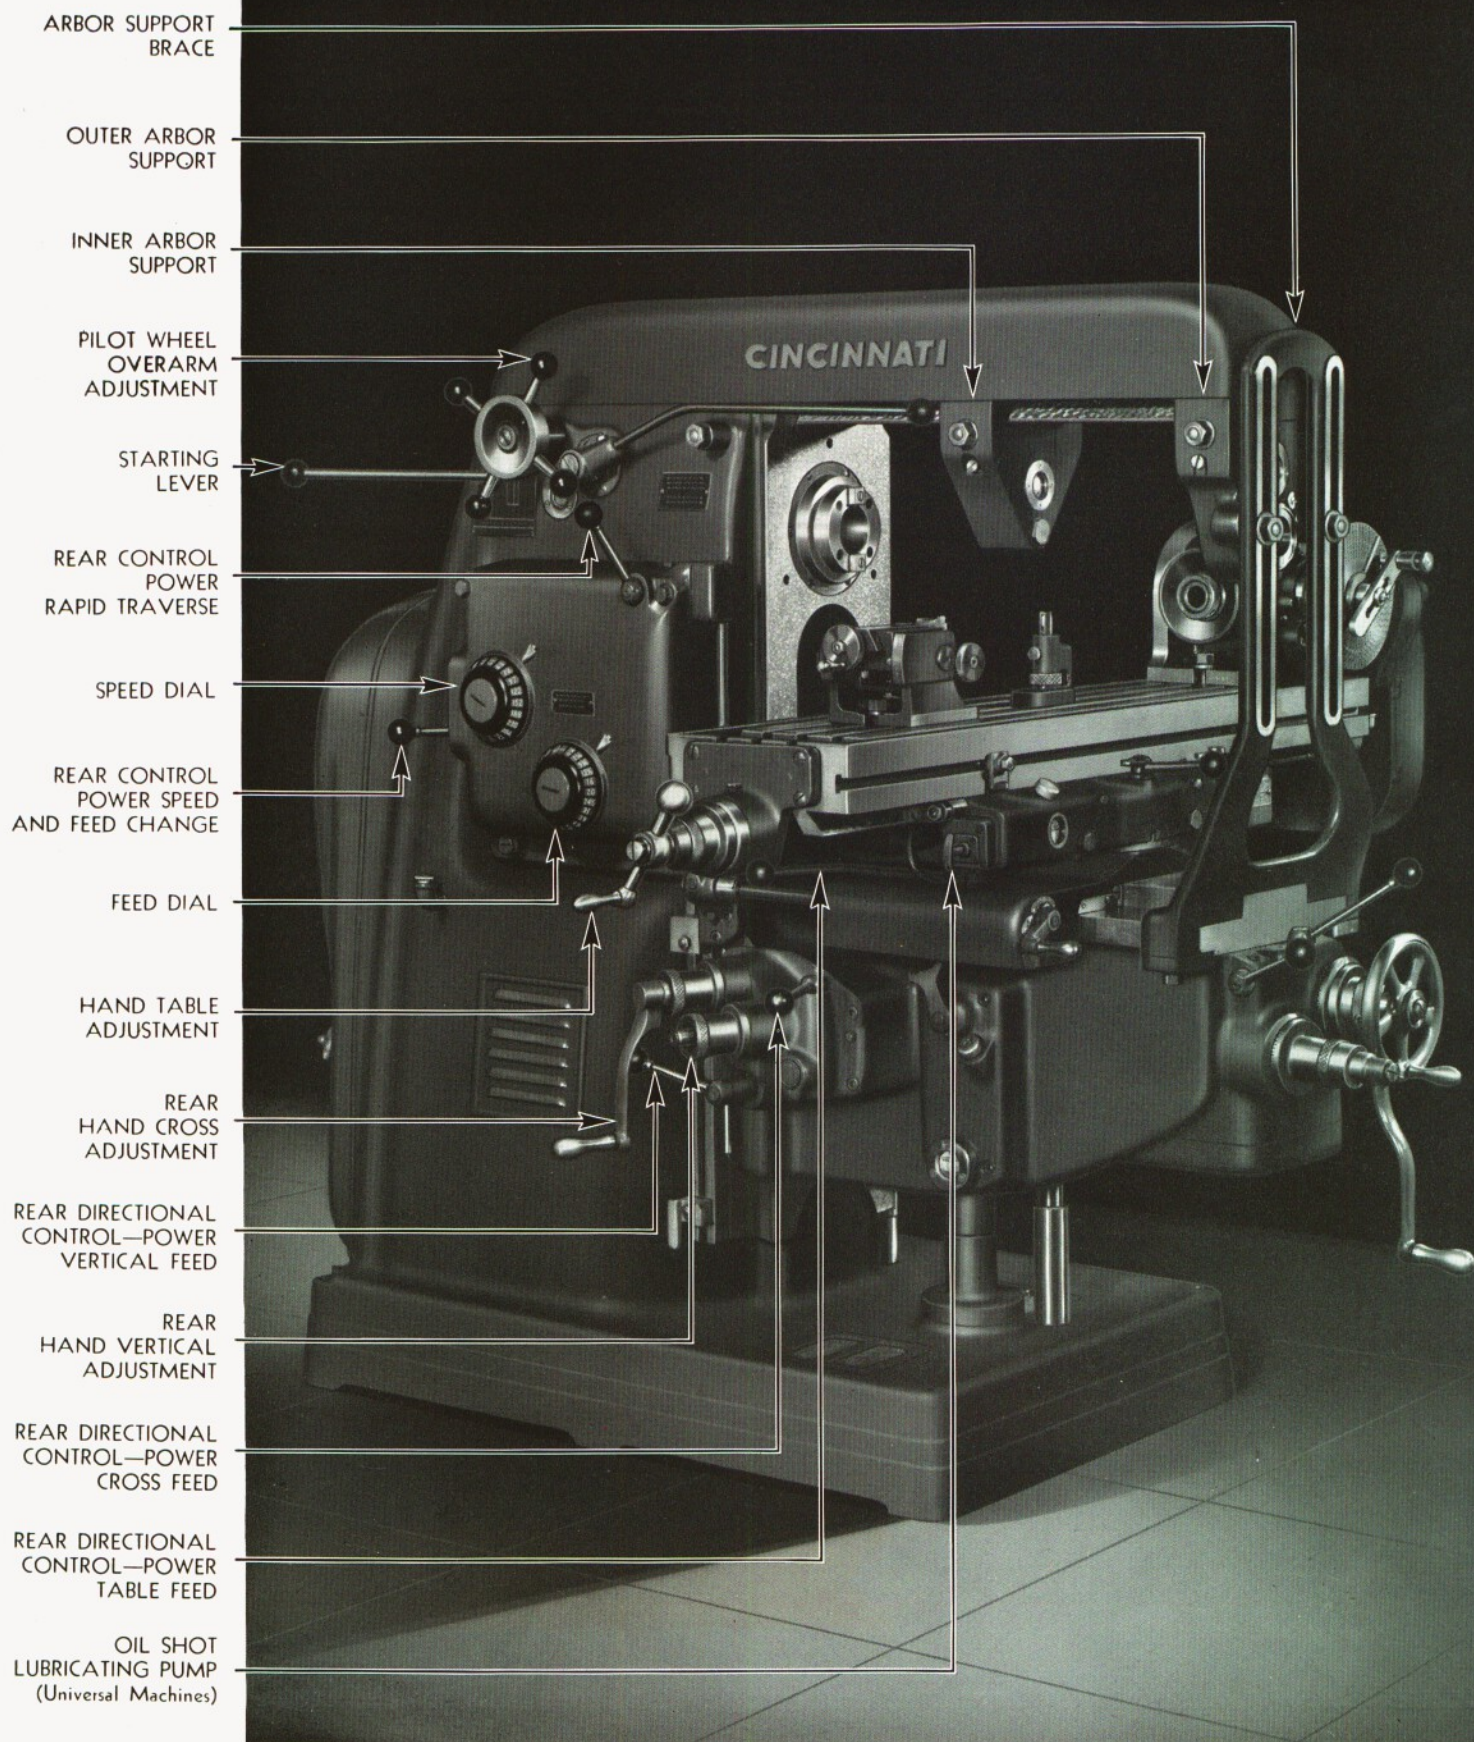

HIGHLIGHTS OF DESIGN

and Accruing Benefits (Concluded)

- 11. Automatic Motor Cut-Out Switch.** If operator forgets to shut off power, motor automatically stops when hinged cover at rear is opened.
- 12. New Type of Overarm Brace.** It clamps to top of knee; increases rigidity of machine for heavy cuts. Short arbors can be used with braces.
- 13. Rugged Proportions of Principal Casting.** Dampen out vibrations; withstand heavy loads.
- 14. Heavy, Multiple Disc Clutches.** Heavy duty multiple disc starting clutch starts spindle drive instantly; plenty of reserve power for pulling the heaviest load; heavy duty multiple disc brake stops spindle instantly . . . safer for the operator.
- 15. Simple, Effective Lubrication.** Principally automatic; prolongs machine life-span; daily requirements can be handled very quickly.
- 16. Rectangular Overarm.** Solid and rigid straight-edge alignment of overarm and arbor supports with centerline of spindle.
- 17. Hand Cranks Automatically Disengaged When Released.** Safer for the operator.
- 18. Enclosed Dividing Head Driving Mechanism.** Provides leads of 2.5" to 100". (Leads from .010" to 1000." with special attachment — Circular M-658.) Safer for the operator.
- 19. Dividing Head.** Powerfully built, withstands heavy cuts, exceptionally accurate.

COARSE HAND
VERTICAL HEAD
ADJUSTMENT

POSITIVE
MICROMETER
STOP

FINE HAND
VERTICAL HEAD
ADJUSTMENT

FRONT DIRECTIONAL
CONTROL—POWER
TABLE FEED

FRONT CONTROL
POWER SPEED
AND FEED CHANGE

FRONT DIRECTIONAL
CONTROL—POWER
CROSS FEED

TABLE DOGS

FRONT
HAND CROSS
ADJUSTMENT

FRONT DIRECTIONAL
CONTROL—POWER
VERTICAL FEED

FRONT CONTROL
POWER RAPID
TRAVERSE


FRONT
HAND VERTICAL
ADJUSTMENT

SADDLE CLAMP

COOLANT
RETURN TUBE

OIL SHOT
LUBRICATING PUMP
(Plain and Vertical Machines)


KNEE CLAMP

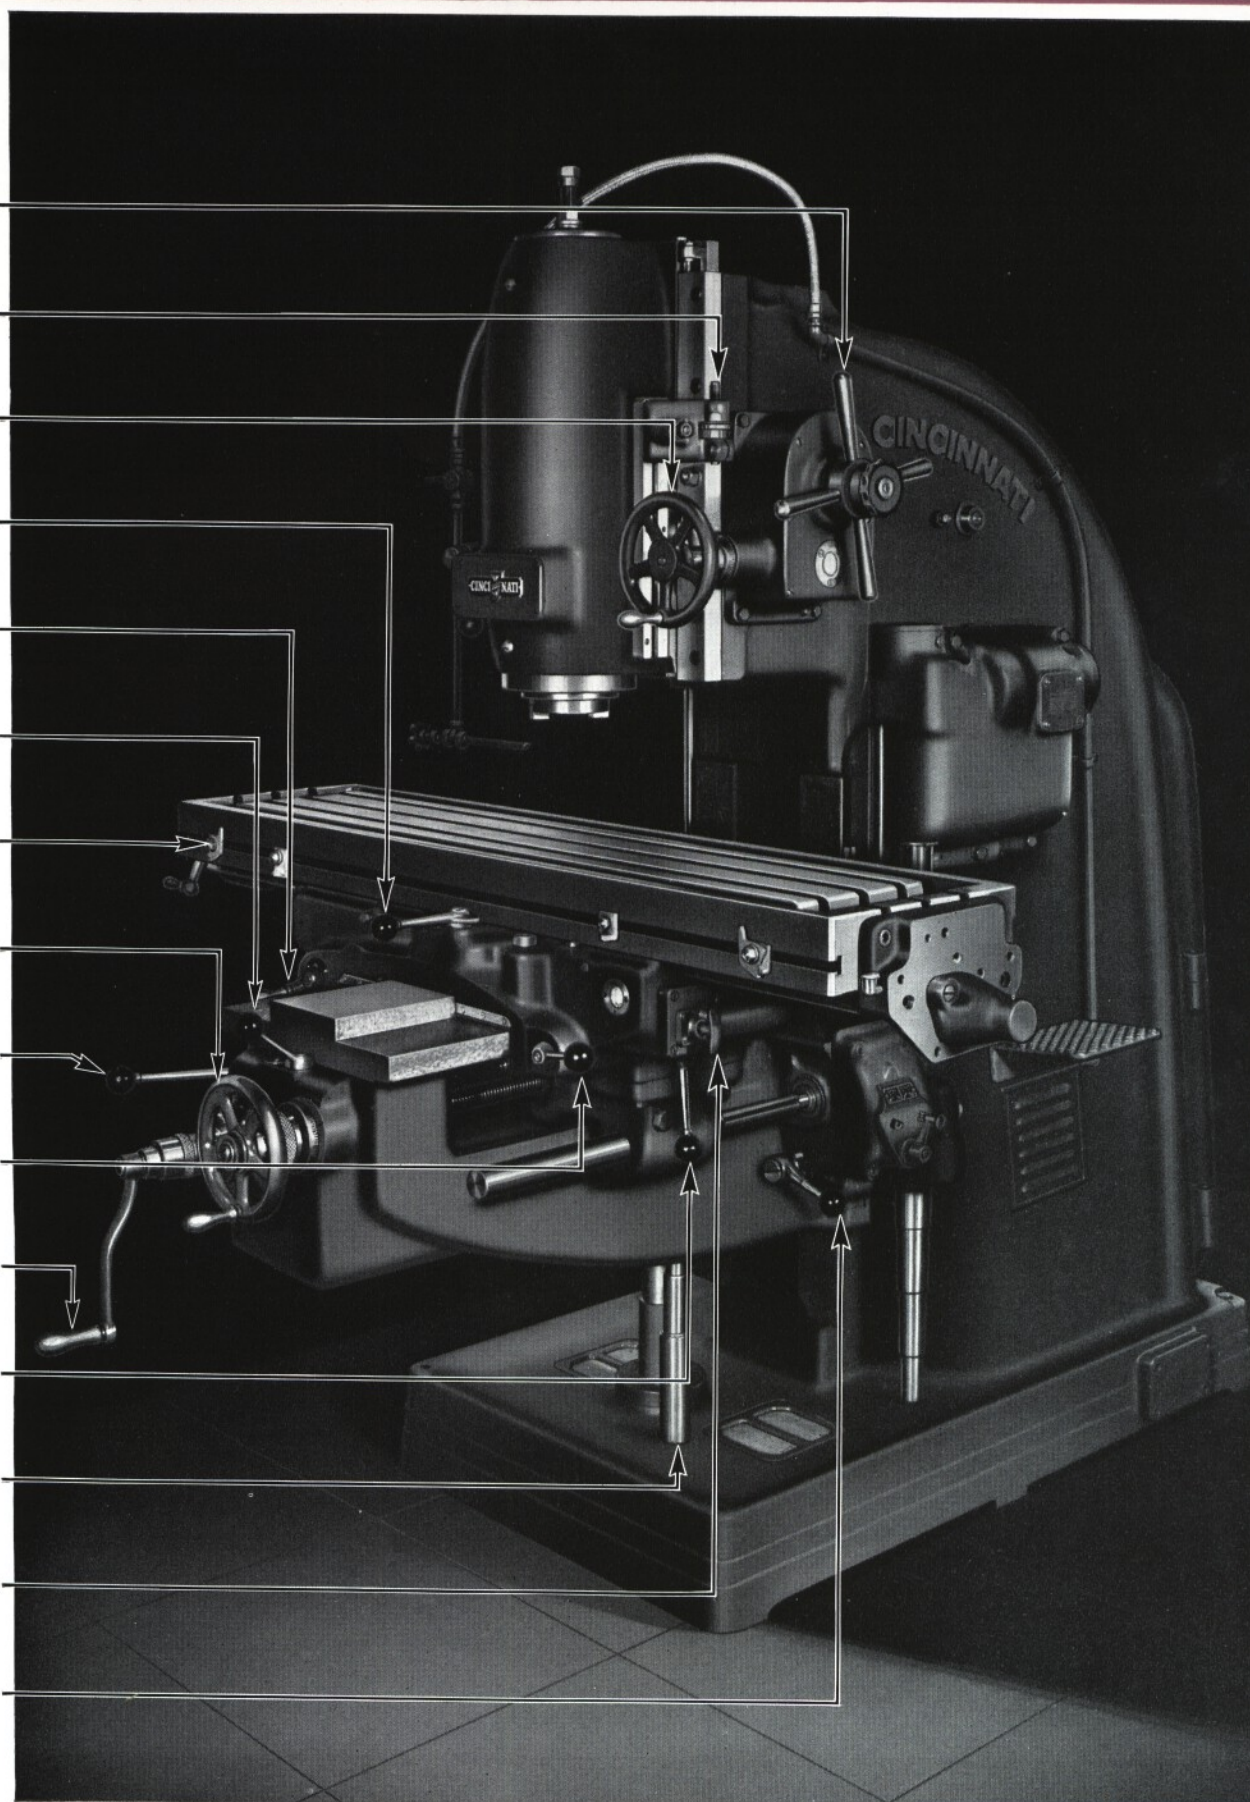



RECTANGULAR OVERARM WITH PILOT WHEEL CONTROL

Pilot wheel control cuts down the effort of moving the overarm when changing cutters or arbors. It's convenient, too, for the overarm clamping nuts are near the pilot wheel, at a normal height to apply leverage on the wrench.

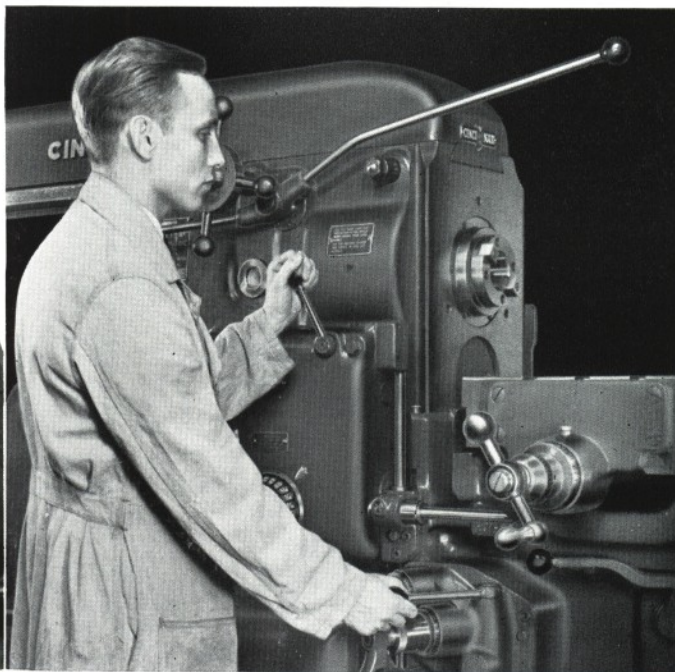


POWER RAPID TRAVERSE CONTROL AT THE REAR

Engaging the table rapid traverse from the rear working position. Without moving a step, he can also engage the cross and vertical rapid traverse. These handy rear controls, duplicating all those in front of the machine, allow him to make the necessary manipulations from the rear of the table when the work obscures the cutter.




LIGHT WEIGHT ARBOR SUPPORTS

It's easy to remove or replace the arbor supports. They're made of an aluminum alloy, about half the weight yet stronger than cast iron. Overarm and supports clamp tightly against a solid dovetail locating side in straight-edge alignment; no twisting; no permanent set.

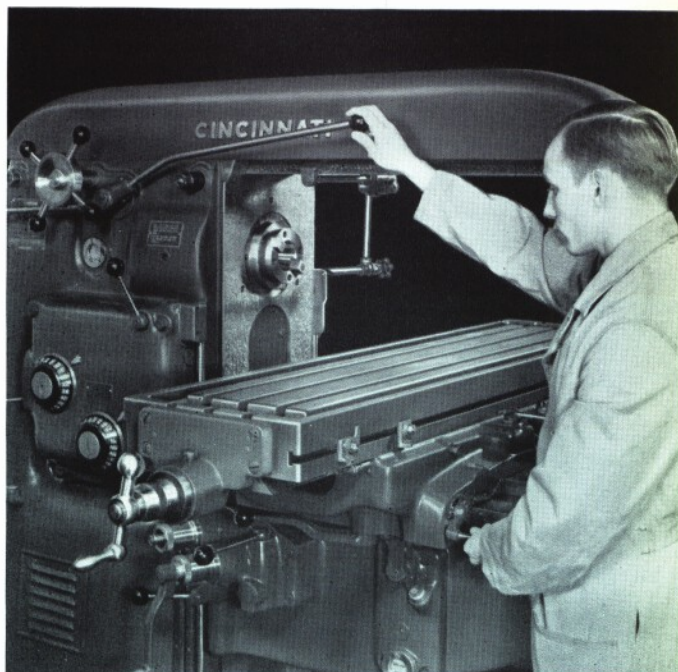

POWER SPEED AND FEED CHANGES AT THE FRONT

He changes speeds and feeds without walking; without effort; and one lever does both jobs. A mere touch of the starting lever instantly stops the spindle. Then with a flip of the speed-feed change lever, the dial clicks around, and when the desired reading lines up with the arrow, he's all ready to go. The machine does the work of shifting gears, he merely swivels a lever and starts and stops the spindle drive.

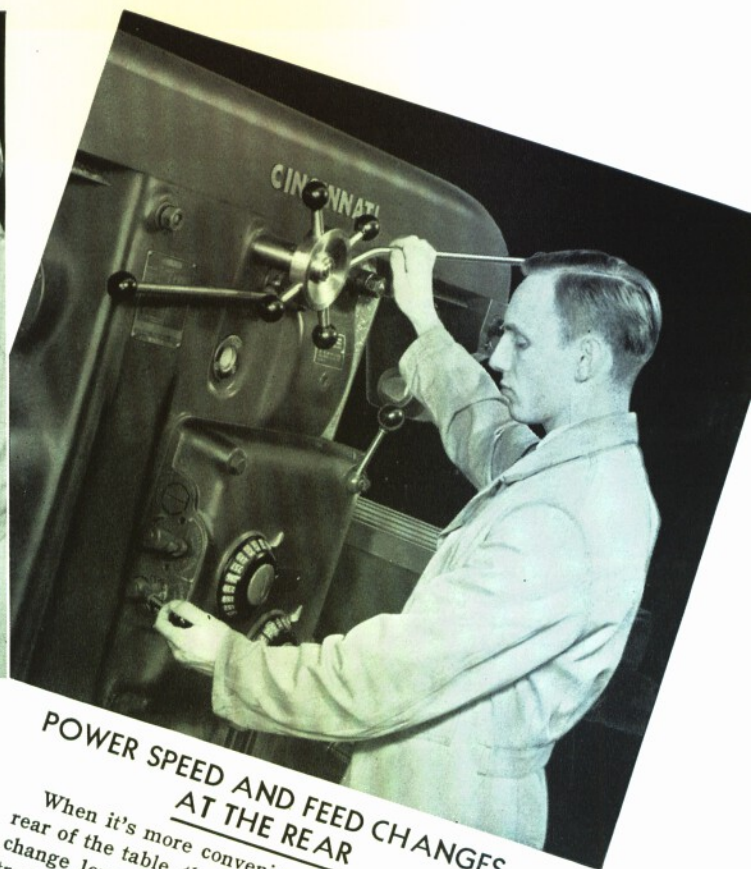



POWER SPEED AND FEED CHANGES AT THE REAR

When it's more convenient to work from the rear of the table, there's a duplicate speed-feed change lever right at his elbow. No need to trudge around to the front of the machine to change speeds or feeds. He gets more done, and does it easier, the Dial Type way.

PULL-OUT QUICK ADJUSTING MICROMETER DIALS

He doesn't have to add or subtract mentally when adjusting the work to the cutter. Just pull out the dial, rotate it to match the zero mark with the starting line, and then start the adjustment from zero. There's no "play" or looseness to throw the dial marks out of register with the zero line; the clutch teeth take care of that. Cross, vertical and table hand adjustments, front and rear, have these dials.

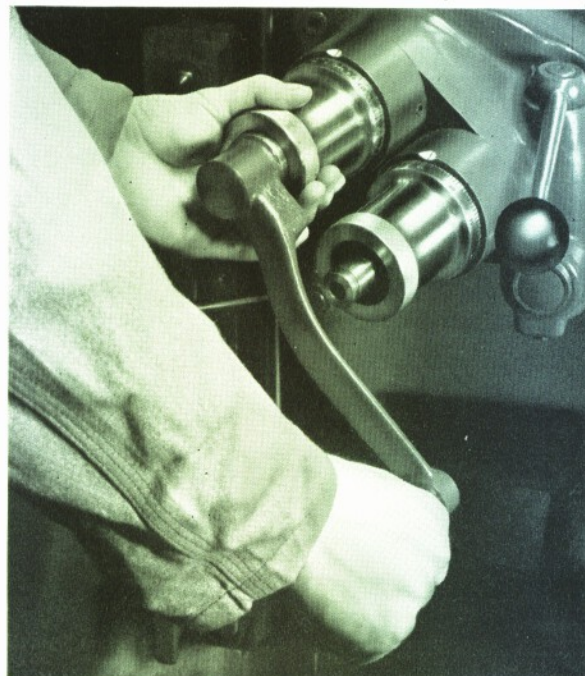

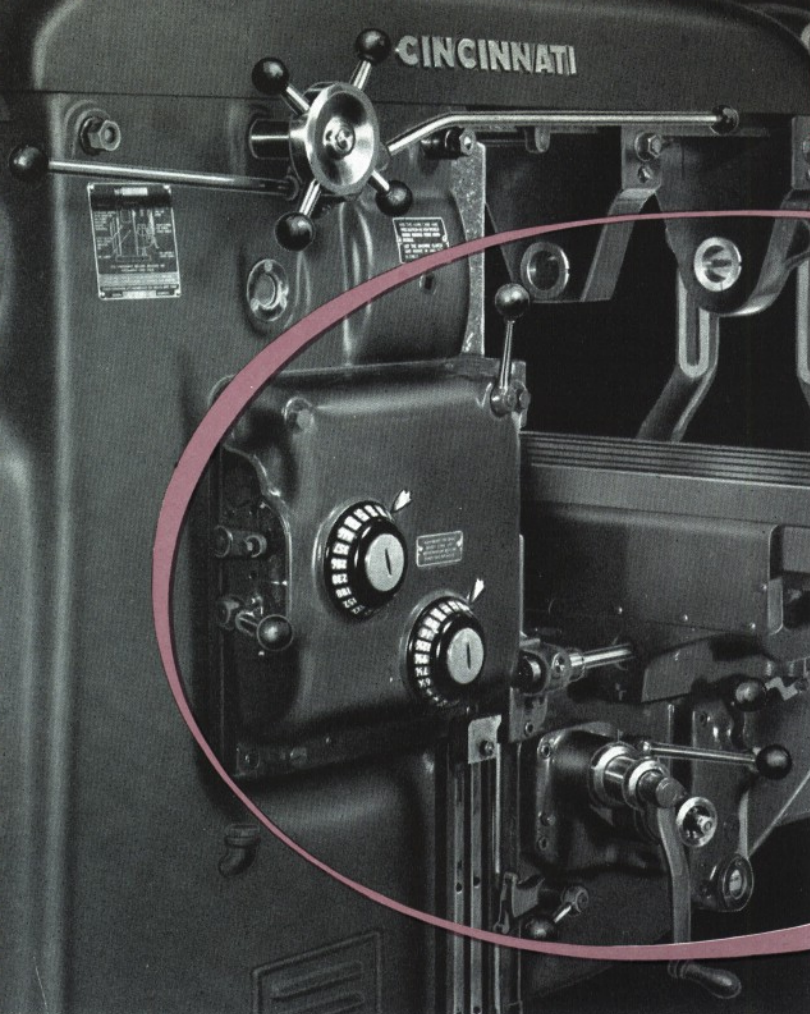

COMPLETE DUPLICATE REAR CONTROLS

The convenient arrangement of rear controls. All within reach, without walking or stretching.

Easy, Safe and Convenient to Operate

Because the Dial Type Millers are easy and convenient to manipulate, the operator finds it easy to turn out more work without additional effort . . . he can earn more while your shop costs go down. Here are the factors which contribute to this unusual ease of operation:

First of all, it's no effort to change speeds or feeds, and it may be done while standing either at the front or rear of the table. In any case, the machine does the actual work of shifting gears; while the operator merely swivels a small lever. There's no clashing or "dead ending" of gears, for the shifting mechanism slides them in and out of mesh in perfect coordination. While the shifting lever is engaged, say in the "feed" position,

the large, easy-to-see feed dial clicks around to the various readings. Incidentally, it requires only a few seconds for a complete revolution. As soon as the lever is released, the dial stops, and the proper gears are in mesh to produce the feed indicated by the arrow.

Engaging or disengaging the main drive clutch requires no more effort than a light touch on the starting lever. Here again, the machine does most of the work. A hydraulic mechanism engages the clutch spool, reducing the effort of starting to a small fraction of the conventional design.

All control levers are easy to reach—easy to engage. Power feed levers for all feed movements—table, cross, and vertical—are

independent directional controls. Hand adjustments are provided with anti-friction bearings for easy and accurate adjustment of the work to the cutter.

Horizontal machines are equipped with duplicate power and hand controls at the operator's rear working position (behind the table at the left-hand side of the column). With this arrangement, the work never obscures the operator's view of the cutter, for he can work from the front or rear as the job requires. Quite naturally, spoilage drops to a new low.

Dial Types are safe, too. There are no exposed rotating parts; hand cranks and handwheels automatically disengage when released; a built-in switch automatically stops the motor as soon as the hinged cover at the rear is opened; when the spindle drive is disengaged, a multiple disc brake automatically and instantly stops the spindle.

Accurate Results


Several factors contribute to the better than average accuracy which may be obtained. Liberal proportions of the principal castings, plus the rigid four-bearing precision, anti-friction mounting of the spindle (self-compensating at the rear for temperature changes), fulfill the basic requirements for accurate results. Wide bearing surfaces on top of the knee, with narrow center guide construction, promote smooth cross adjustment of the saddle. All flat bearing surfaces are hand scraped to accurate gages. The ample length of knee bearing on the column prevents the knee from sagging, assures milled surfaces that are flat and parallel to the table. Pull-out micrometer dials provide a simplified method of setting the dials before adjusting the work to the cutter.


NEW OVERARM BRACE FOR EXTRA HEAVY CUTS

New type of brace rigidly ties knee to overarm; adds strength to withstand those extra heavy cuts.

STANDARD V-BELT DRIVE; ACCESSIBLE COOLANT PUMP

When the hinged cover is opened, the motor automatically stops; an important factor in safety.

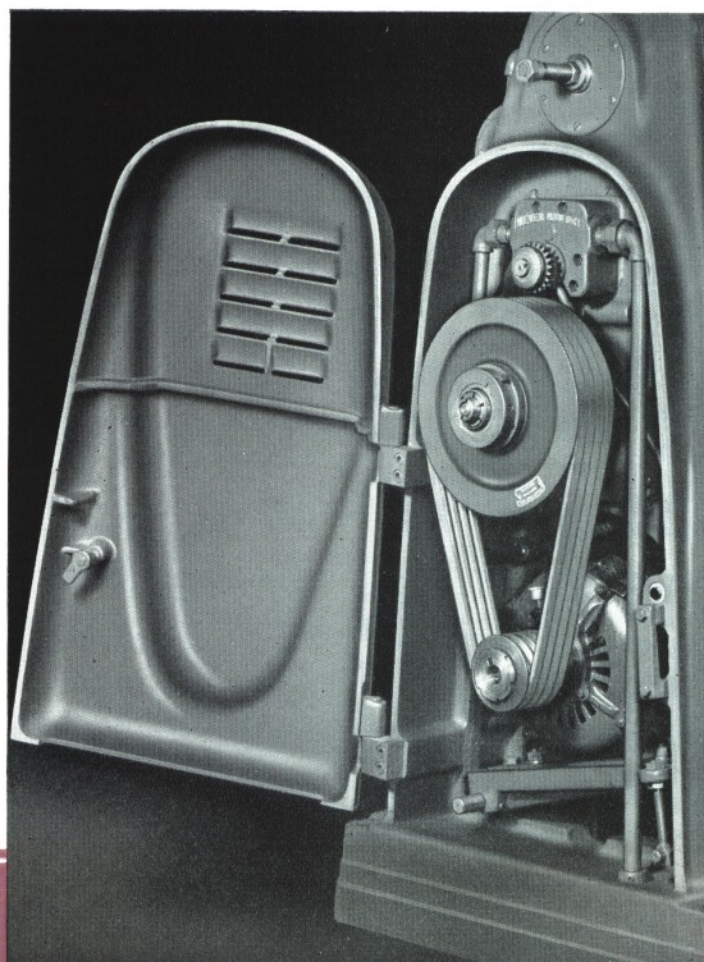

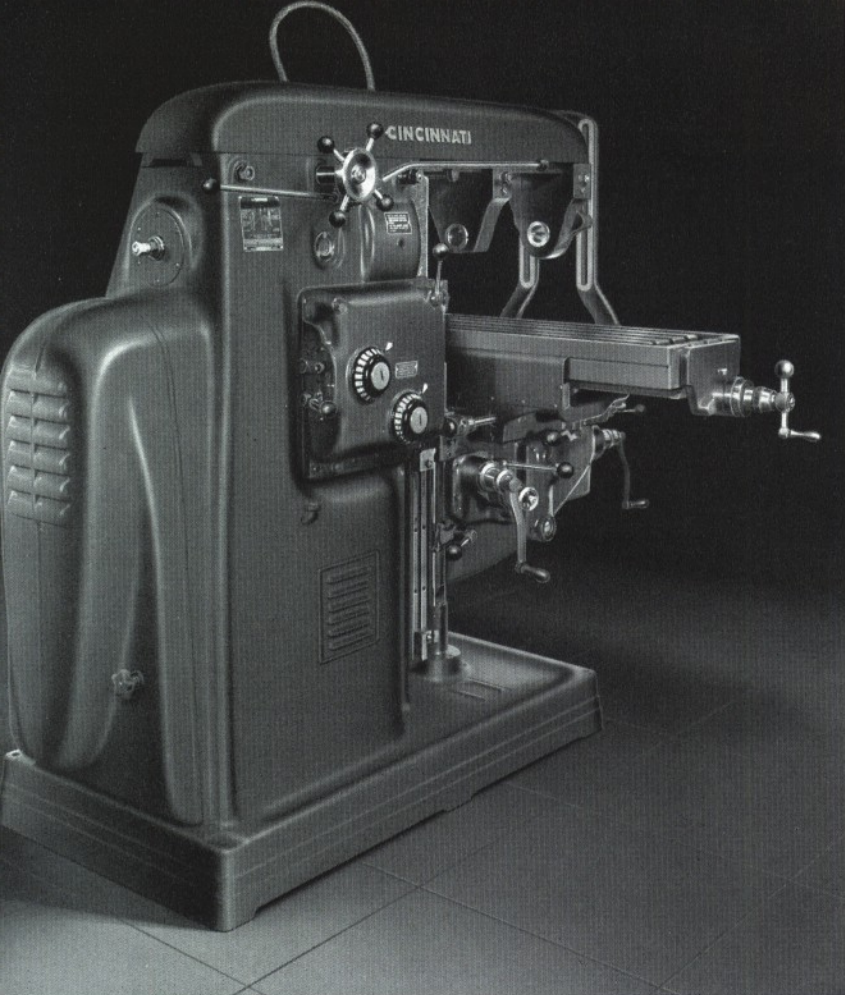

← EVIDENCE OF STRENGTH

Rear view of the No. 3 Plain Dial Type. Smooth lines indicate the sturdy construction.



↑ PLEASING APPEARANCE TO THE LAST DETAIL

Coolant is conveyed to the cutter through armored metal braid hose and flexible copper tubing.

High Stock Removal

Dial Type Milling Machines are designed for miscellaneous milling operations, and quite naturally they also handle the heavy stock removal jobs in their stride. They have the power and stamina to remove metal quickly . . . a cost-reducing asset for both tool room and production work.


Notice the sturdy proportions of the principal castings, shown to advantage in the several views of the complete machine throughout this booklet. The column has the smooth lines so essential to a rigid and substantial supporting element. It looks massive, and the generous thickness of walls and heavy ribs substantiate the appearance. The overarm of the horizontal machines is unusually heavy, constituting a rigid support for the outer end of the arbor.

A new type of overarm brace effectively ties the knee to the overarm for those extra heavy cuts. It clamps to the top of the knee, forming the most effective arrangement for increasing rigidity. Then, too, short arbors can be used with this new brace, since it may be clamped right next to the front of the saddle.

Note the ample proportions of the knee, saddle, and table castings. The knee bearing on the column and saddle bearing on the knee are exceptionally wide, while the table has plenty of depth in addition to underneath surface-plate ribbing. These are the proportions that resist twisting and deflections; withstand the strain of extra heavy cuts.

MASSIVE VERTICAL HEAD ➔

Rear view of the No. 3 Vertical Dial Type. Massive proportions of upper part of column add plenty of reserve strength for heavy face milling operations.

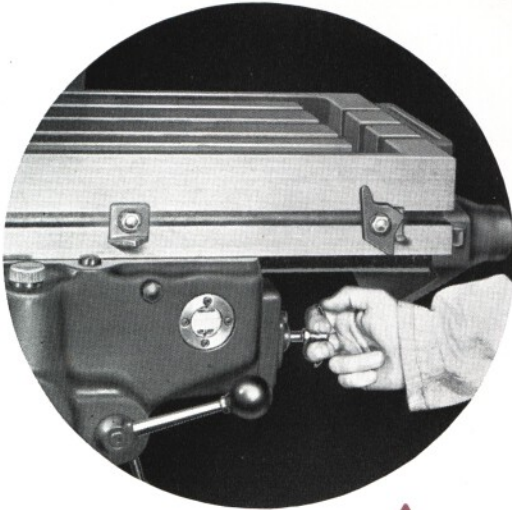

PLENTY OF OIL ↑ WHERE IT'S NEEDED

Pressure oil-shot system for the saddle and table parts. No hard-to-find oil holes for the operator to overlook; with a few strokes of the plunger, the oil-shot pump takes care of all the saddle-housing-table bearing surfaces.



Long Useful Life-Span

CINCINNATI Dial Type Milling Machines have many features and design characteristics that keep them young in performance when they become old in years.

Lubrication is a relatively simple procedure. All parts within the column are automatically lubricated by a pump and splash system; all parts within the knee are likewise automatically lubricated by a pump and splash system; while all parts within the saddle and housing are lubricated by a pressure oil-shot system. High-grade materials are used throughout; high content


chrome-nickel steels for the gears and shafts, Meehanite metal for all iron castings. Heat-treatments for gears, spindles, and shafts employ the latest scientific equipment. Test after test—an inspection after each operation on every part—assures no faulty workmanship. Adjustments can be taken care of by the average operator.

All these factors combine to minimize maintenance expenditures and yearly depreciation. And when you must turn out the work quickly, the Dial Types are on the job and ready to go at a moment's notice.

A Picture of Cincinnati Dividing Head Accuracy

ACTUAL ACCUMULATIVE ERROR IN
INDEXING FOR DIVIDING HEAD IS .001"

Checking the indexing accuracy of a Cincinnati
Dividing Head by means of an Optical Microm-
eter and a circular scale graduated in degrees.
The actual accumulative error of this head is
.001" in a 12" circle.

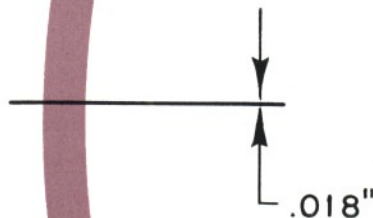

144"




This circle and the intersecting line at the left graphically illustrate CINCINNATI Dividing Head accuracy. The line, a wire .018" in diameter, contrasted with a 12-foot diameter circle, represents to a true scale the maximum allowable accumulative error in standard CINCINNATI Dividing Heads. Actually, the wire is but $\frac{1}{25410}$ of the circumference of the circle! This is precision indexing.

Every CINCINNATI Dividing Head is thoroughly checked to give you a precision instrument of the highest order. Accuracy is built in at the start.


Fine materials, correct design, and special manufacturing facilities, combined with the workmanship of skilled craftsmen, are definitely responsible for the close accuracy and fine performance of CINCINNATI Dividing Heads.

A CINCINNATI Universal Dividing Head is supplied as standard equipment with all Cincinnati Universal Milling Machines. The use of the Dividing Head equipped with the Wide Range Divider (supplied at extra cost—see page 24) enables you to quickly select divisions from 2 up to 400,000 without the use of change gears or additional index plates.

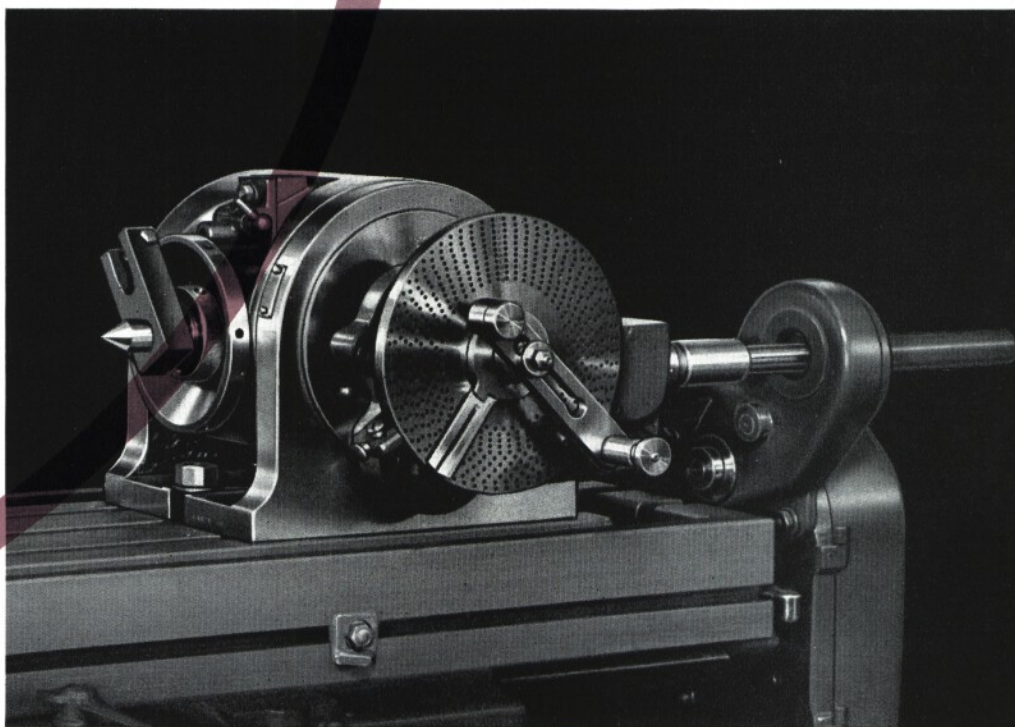

ATTACHMENTS AND ACCESSORIES


SUPPLIED AT EXTRA COST

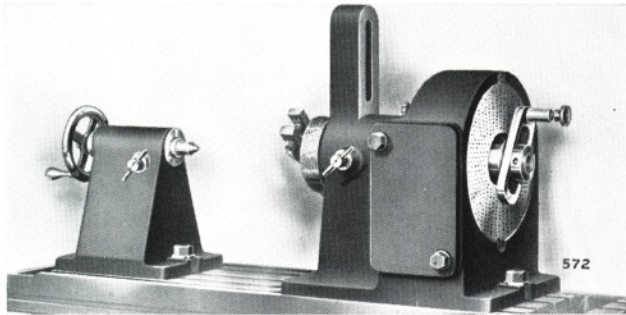

PLAIN INDEX HEAD . . .

built with 12" and 16" swing for ordinary gear cutting and similar work that is machined by being indexed between centers. It indexes three and five divisions—and all even numbers from 4 to 50, inclusive.


●Publication No. M-835.



PRECISION MEASURING EQUIPMENT . . .

helps you space holes accurately to very close limits. Simple . . . fast . . . ideal for jig boring when holes are relatively close together.


●Publication No. M-624.

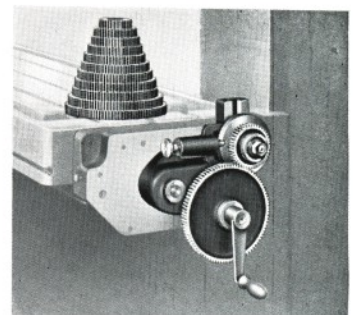

RACK INDEXING ATTACHMENT . . .

used with rack milling attachment. It is connected to the leadscrew at end of table, and consists of indexing and locking plate with change gears. Different combinations of gears enable racks of different pitches to be machined.


●Publication No. M-568



RACK CUTTING ATTACHMENT . . .

for cutting racks, ordinarily used in connection with rack indexing attachment. Built with either 1 1/4" or 1 3/4" diameter spindles. Vise is 3 1/4" long and takes work up to 5 3/8" wide.


●Publication No. M-568

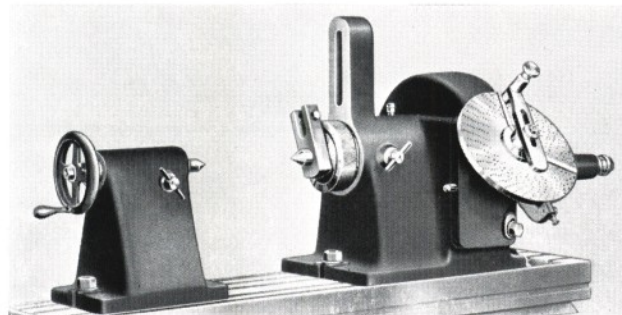

GEAR CUTTING ATTACHMENT . . .

for all classes of spur gear cutting and similar work requiring a high degree of accuracy. Spiral milling head consists of this same attachment with driving shaft for connecting to machine leadscrew.


●Publication No. M-835



16" CIRCULAR MILLING ATTACHMENT . . .

Hand feed is illustrated. Has 16" diameter table. Circumference graduated in degrees to facilitate angular settings.


●Publication No. M-573



MOTOR DRIVEN UNIVERSAL ATTACHMENT . . .

mounted on special overarm for milling bevels, flats and angles; milling slots in jigs, fixtures, moulds, dies and patterns. Overarm can be used for regular arbor support.


●Publication No. M-632



INDEXING EQUIPMENT . . .

for circular milling attachment. Indexing plates same as standard or high number plates used with the Universal Dividing Head.


●Publication No. M-568

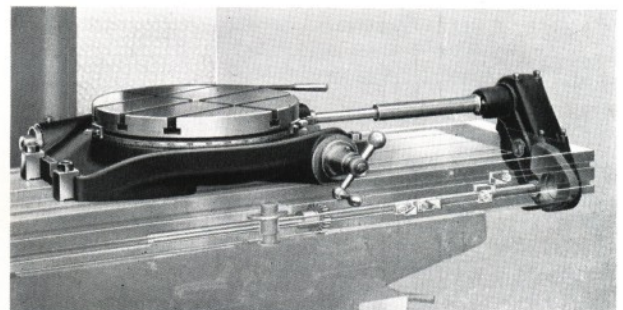

20" AND 24" CIRCULAR MILLING ATTACHMENTS . . .


Power feed is shown. Built with 20" and 24" diameter tables. Dogs for automatic throwout are provided. Table of attachment is graduated in degrees to facilitate angular settings. Easy to set up. Gives you the equivalent of a rotary table miller.

●Publication No. M-573.




HIGH-SPEED UNIVERSAL MILLING ATTACHMENT . . .
has high speeds for small to medium size cutters. Swivels to any angle in a plane parallel to the face of the machine column, or 90° in a right angle plane. Cross range, 7 inches, plus cross range of machine. Can be equipped at extra cost with quill hand feed device and quick change adapter.

●Publication No. M-803




SEMI-HIGH SPEED VERTICAL ATTACHMENT . . .
will help you key seat, die sink, mill T slots and work of similar character. Swivels through 360 degrees. Spindle speeds 1½ times speeds of High-Speed Dial Types and 2 times speeds of Medium Speed Dial Types.

●Publication No. M-963

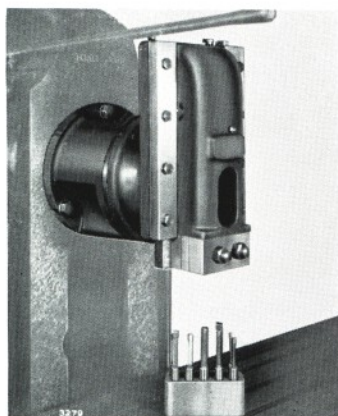


SLOTING ATTACHMENT . . .
For your operations where a slotter is not available; for keywaying, die and tool work. Tool slide can be set any angle through 360 degrees. Stroke from 0" (zero) to 4". Set of slotting tools supplied at extra cost.

●Publication No. M-919



Nos. 3 and 5 PLAIN VISES . . .
used on Plain Machines. Depth, width and opening of jaws: No. 3—1½" x 6½" x 4"; No. 5—2½" x 8½" x 7".

●Publication No. M-566-1



Nos. 3 and 5 SWIVEL VISES . . .
used with Universal Millers. Can be converted into plain vise by removing swivel base. Depth of jaws, etc., same as corresponding size of plain vise.

●Publication No. M-566-1




TOOL MAKER'S UNIVERSAL VISE . . .
for general tool room work. Can be swiveled in vertical position up to and including 90 degrees—360 degrees in a horizontal position.

●Publication No. M-566-1


HEAVY VERTICAL ATTACHMENT . . .
is ideal for your face milling where there is not enough work to keep a Vertical Milling Machine busy. Spindle speeds same as machine.

●Publication No. M-960




RAISING BLOCKS . . .
give increased range to your Dividing and Index Heads. Height of blocks, 2" to 3".

●Publication No. M-644




RIGHT ANGLE PLATE . . .
for setting up Dividing Head or small fixtures at right angles to table T slots. Equipped with suitable tongue strips to fit table T slots.

●Publication No. M-644




HIGH NUMBER INDEXING ATTACHMENT . . .
for regular dividing and plain and spiral heads. Three special index plates. Indexes all numbers up to and including 200; all even numbers and those divisible by 5 up to 400. You can apply them to your old Dividing Head.

●Publication No. M-835




UNIVERSAL SPIRAL ATTACHMENT . . .
for milling spirals of any angle on a Plain Miller, or angles greater than 45 degrees on a Universal. Mills in horizontal, angular or vertical plane. Spindle speeds same as machine.

●Publication No. M-804



ENCLOSED DRIVING MECHANISM FOR SPIRAL HEADS AND DIVIDING HEADS . . .
Spirals can be milled advantageously on Plain Machine equipped with Universal Spiral Milling Attachment and Universal Dividing Head equipped with standard enclosed driving mechanism. Equipment includes set of change gears. Lead range, 2½" to 100". The open type driving mechanism is also available.

●Publication No. M-741

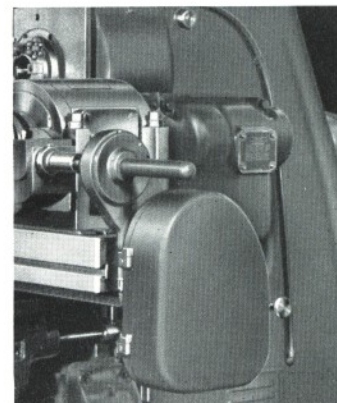





QUICK CHANGE ADAPTER, ARBORS AND COLLETS . . .
enable you to replace one cutter with another in 20 seconds or less. Now, many operations can be done with one setting of work.

●Publication No. M-625

CAP-TYPE ARBOR SUPPORT . . .
mounted between slotting cutters, allows you to quickly and easily remove the arbor without disturbing the setting of the cutter gang.

●Publication No. M-626


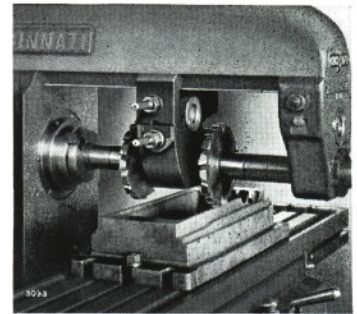


HIGH-SPEED ATTACHMENT . . .
for Vertical and Horizontal machines. Used for die work and profiling operations on metal patterns; also model and experimental work. Spindle speed 1.6 times spindle speed of *High-Speed* Dial Types and 3.4 times spindle speed Medium Speed Dial Types.

●Publication No. M-858


CAM MILLING ATTACHMENT—POWER OR HAND FEED . . .
for milling face cams 16" in diameter and cylindrical cams 8" in diameter. The change from face to cylindrical cam milling is readily made by turning the worm wheel at right angles to milling machine spindle.

●Publication No. M-857

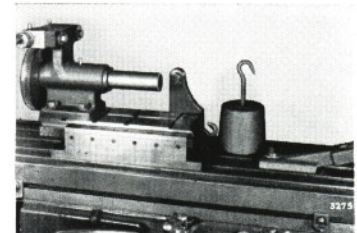


SPECIAL TWO-SPINDLE VERTICAL MILLING ATTACHMENT . . .
for milling channels in aero-engine baby rods, etc. Outer spindle has both horizontal and vertical adjustment for lining up with inner spindle. Depth of cut is controlled by knee adjustment.

KEYWAY MILLING ATTACHMENT . . .
for rounding out the ends of keyways. Mounted on face of column and supported by overarm. Quill adjustment and fixed stops provide fast, accurate method for positioning quill to depth.

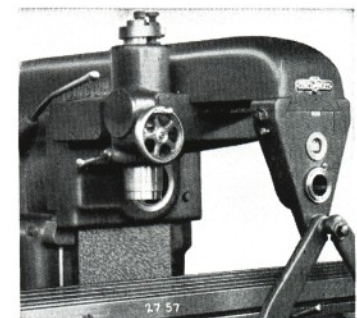


WIDE RANGE DIVIDER . . .
with Cincinnati Universal Dividing Head, gives you a rapid selection of divisions from 2 to 400,000 and any angle at intervals of six seconds without the use of change gears or additional index plates. Keyways, slots and holes can be quickly spaced in angular relationship to each other. Can be used for indexing bevel or spiral gears. Your present Cincinnati Head can be rebuilt and equipped with the Wide Range Divider at low cost.

●Publication No. M-972

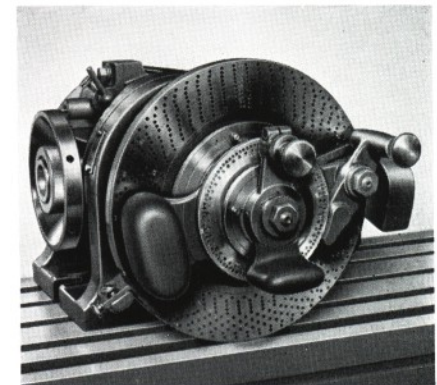


CUTTER COOLANT PUMP . . .
Individually motor driven, including 1/4 h.p. motor, starter, and piping. May be easily installed on your machine.

●Publication M-958

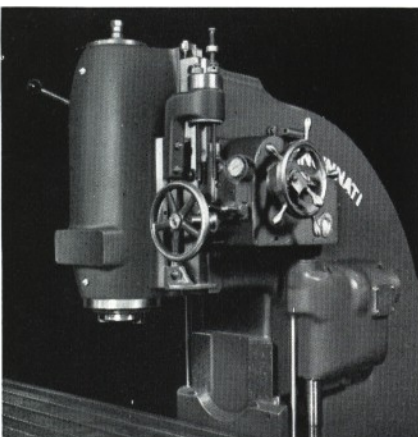


FOUR-POSITION TURRET STOP FOR VERTICAL MILLERS . . .
provides you with a faster, easier, more accurate method of setting spindle for step-milling.

●Publication No. M-626

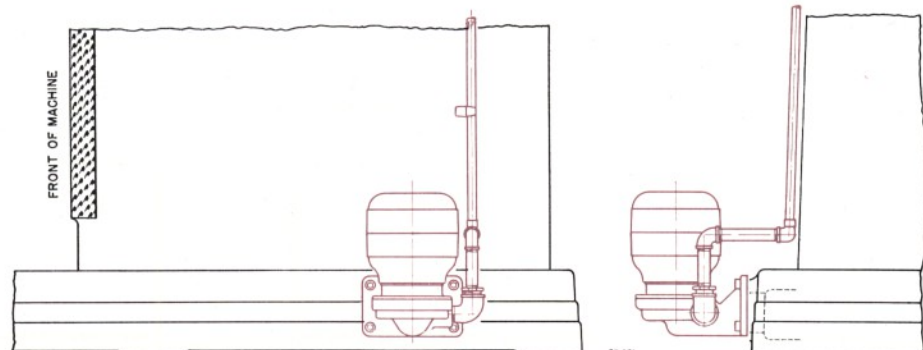

ARBORS—No. 50 SERIES TAPER
For Cincinnati Plain and Universal Dial Type Milling Machines

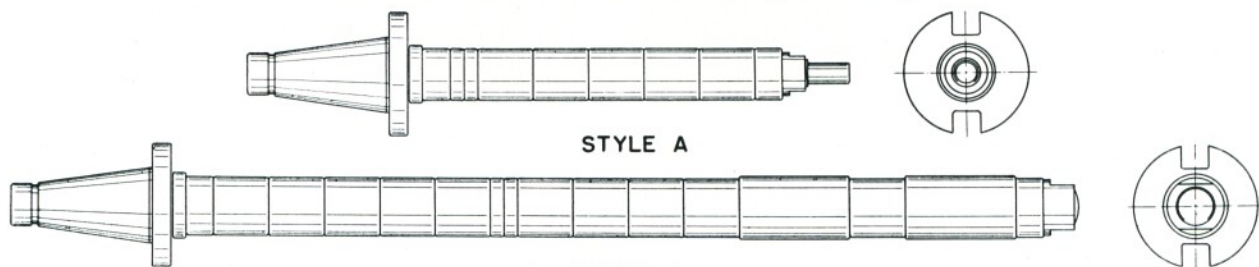

STYLE A


STYLE B

INCH SIZES

Diameter	Style	Usable Length of Cutter Space	Diameter of Bearing Collar	Keyway		Code Name	Catalog Number
				Width	Depth		
1 7/8	A	10				TENAR	50- 7/8A10
1	A	12				ARTWA	50-1 A12
1	A	15				ARBAA	50-1 A15
1	A	18				ATARB	50-1 A18-4
1	B	24	2 1/8	1/4	1/8	ARBFA	50-1 B24-4
1 1/4	A	12				ARBCO	50-1 1/4A12
1 1/4	A	15				AROGU	50-1 1/4A15
1 1/4	A	18				ARBRU	50-1 1/4A18-4
1 1/4	B	24	2 1/8	1/4	1/8	BETAR	50-1 1/4B24-4
1 1/4	B	18	2 1/8	1/4	1/8	ONARB	50-1 1/4B18-4
1 1/2	B	24	2 1/8	1/4	1/8	HAFAR	50-1 1/2B24-4
1 1/2	B	18	2 1/8	1/4	1/8	FORAR	50-1 1/2B18-4
1 1/2	B	30	2 1/8	1/4	1/8	ARBTY	50-1 1/2B30-4
1 1/2	B	36	2 1/8	1/4	1/8	ARGOB	50-1 1/2B36-4
2	B	24	2 3/4	1/2	1/8	*ARJYN	*50-2 B24-5
2	B	30	2 3/4	1/2	1/8	*TUBAR	*50-2 B30-5
2	B	36	2 3/4	1/2	1/8	*ARCOD	*50-2 B36-5

*Note—Two suitable bushings for 2 3/4" diameter bearing collars are included in the price of these arbors.

SHELL END MILL ARBORS—Style C
For Cincinnati Plain, Universal and Vertical Dial Type Milling Machines



Diameter Range of End Mills	Stud Diameter	Code Name	Catalog Number
1 1/4—1 1/2	1/2	SHEMA	50- 1/2C 3/8
1 3/4—2	5/8	SEMCO	50- 3/4C 3/8
2 1/4—2 1/2—2 3/4	1	SHEPU	50-1 C 1/2
3—3 1/2	1 1/4	SHEHI	50-1 1/4C 1/2
4—4 1/2—5	1 1/2	SHEBY	50-1 1/2C 1/2
5 1/2—6	2	SEMOD	50-2 C 3/8

Chrome nickel heat-treated screws for holding shell end mill on arbor are furnished with all arbors

Wrenches are furnished with arbors 1 1/4C 3/8, 1 1/2C 1/2 and 2C 3/8.

QUICK CHANGE ADAPTER, ARBORS AND COLLETS
For Cincinnati Plain, Universal and Vertical Dial Type Milling Machines

QUICK CHANGE ADAPTER, COMPLETE. CATALOG No. NS-H5. Code Name—ADACO.
Complete equipment consists of:
Nut, Special Key, Stop Lug, Spanner Wrench, Stop Lug Screw, Ring, Four Ring Screws, Socket Wrench.

QUICK CHANGE SHELL END MILL ARBORS


Diameter Range of End Mills	Stud Diameter	Code Name	Catalog No.
1 1/4—1 1/2	1/2	ARABB	50- 1/2 FC 3/8"
1 3/4—2	5/8	ARDUI	50- 3/4 FC 3/8"
2 1/4—2 1/2—2 3/4	1	ARSHE	50-1 FC 1/2"
3—3 1/2	1 1/4	ARTTA	50-1 1/4 FC 1/2"
4—4 1/2—5	1 1/2	ARICK	50-1 1/2 FC 1/2"
5 1/2—6	2	AREMI	50-2 FC 1/8"

QUICK CHANGE COLLETS
(Includes Draw-in Bolt)

Inside Taper	Code Name	Catalog No.
No. 7 B.&S.	COQUI	50-NS—FEB 7
No. 9 B.&S.	COSEM	50-NS—FEB 9
No. 10 B.&S.	COSBE	50-NS—FEB 10
No. 11 B.&S.	COTTO	50-NS—FEB 11
No. 2 Morse	CORIC	50-NS—FEB 2
No. 3 Morse	COROB	50-NS—FEB 3
No. 4 Morse	CODDE	50-NS—FEB 4

SPECIFICATIONS FOR CINCINNATI PLAIN

DIMENSIONAL DRAWING

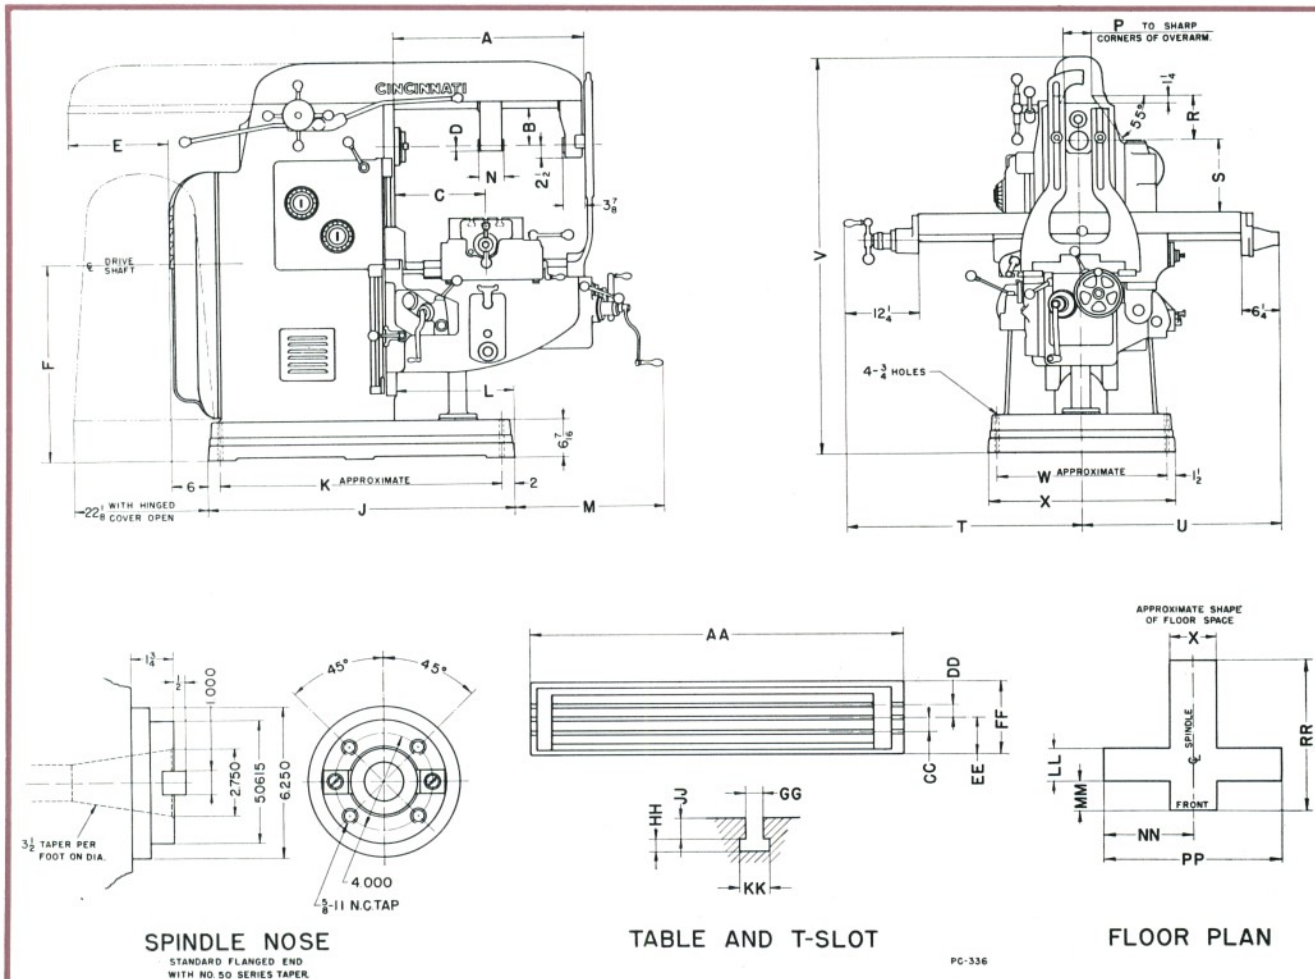

SPINDLE NOSE
STANDARD FLANGED END
WITH NO. 50 SERIES TAPER

TABLE AND T-SLOT

FLOOR PLAN

PC-336

Size of Machine	A	B	C		D	E	F	J	K	L	M	N	P	R	S		T			Size of Machine
			Min.	Max.											Min.	Max.				
No. 2	30 ¼	6 ⅝	9 ⅙	19 ⅞	⅞	16 ½	32 ⅙	50 ¼	46 ¼	19	26 ⅙	4	4 ½	7 ⅝	0	19 ⅙	22 ⅙	50 ⅙	No. 2
No. 3	33 ½	7 ⅜	10 ⅙	23 ⅙	1 ⅙	18 ¾	33 ⅙	59	55	20 ¾	27 ½	4 ⅙	6	8 ⅝	0	20 ⅙	23 ¼	57 ¾	No. 3
No. 4	38 ¼	7 ⅜	11 ¼	25 ⅙	1 ⅙	22 ½	33 ⅙	59	55	20 ¾	32 ⅙	4 ⅙	6	8 ⅝	0	20 ⅙	27 ¼	69 ¾	No. 4
Size of Machine	U		V	W	X	AA	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP	RR	Size of Machine
	Min.	Max.																		
No. 2	20 ⅝	49 ⅜	64 ⅙	27 ½	30 ½	52 ⅙	2 ⅙	2 ⅙	6	12 ¼	⅙	⅙	⅞	1 ¼	22 ⅙	19 ⅙	50 ⅙	99 ⅙	99 ⅙	No. 2
No. 3	23 ¼	57 ¾	70 ⅙	29 ½	32 ½	62 ½	3 ¼	3 ¼	7 ½	15 ¼	⅙	⅝	1	1 ⅙	27 ¾	17 ⅙	57 ¾	115 ⅙	111 ¼	No. 3
No. 4	27 ¼	69 ¾	70 ⅙	29 ½	32 ½	78 ½	3 ¼	3 ¼	8	16 ¼	⅙	⅝	1	1 ⅙	30 ⅞	19 ⅙	69 ¾	139 ⅙	119 ⅞	No. 4

EQUIPMENT SUPPLIED AT EXTRA COST

ARBOR SUPPORTS: (a) Style "B" with 2 1/8" adjustable arbor bushing without lug for brace for use on No. 2 Machine. (b) Style "A" with adjustable arbor bushing for pilot end arbors, for use on Nos. 3 and 4 Machines.

STANDARD UNIVERSAL DIVIDING HEAD EQUIPMENT, including tailstock with 2-point adjustable center; steady rest; one plate for indexing through 40 to 1 reduction—all numbers up to and including 60, all even numbers and those divisible by 5 up to 120, and many beyond; one plate for direct indexing; one center for headstock; and provision for connecting head to enclosed driving mechanism segment. Sizes

(nominal swing): 10" for No. 2 Machine; 12" for No. 3 Machine; 14" for No. 4 Machine.

ENCLOSED DRIVING MECHANISM SEGMENT, including change gears for spiral milling, leads range from 2 1/2" to 100" (only) for Standard Universal Dividing Heads.

VICES, CHUCKS, AND CHUCK ADAPTERS: See "Attachments".

ARBORS, ADAPTERS, COLLETS, QUICK CHANGE ADAPTERS: See page 25.

STANDARD ATTACHMENTS: See pages 22, 23 and 24.

HIGH-SPEED DIAL TYPE MILLING MACHINES

GENERAL SPECIFICATIONS (MODEL ER)

	No. 2 Plain	No. 3 Plain	No. 4 Plain
TABLE			
Working surface.....	52 1/8" x 12 1/4"	62 1/2" x 15 1/4"	78 1/2" x 16 1/4"
Size over all.....	52 1/8" x 12 1/4"	62 1/2" x 15 1/4"	78 1/2" x 16 1/4"
T-slots (number and size).....	Three—1 1/8"	Three—1 1/8"	Three—1 1/8"
Distance between T-slots.....	2 1/8"	3 1/4"	3 1/4"
RANGE			
Longitudinal.....	28"	34"	42"
Cross.....	10"	12"	14"
Vertical.....	19"	20"	20"
Maximum distance from centerline of spindle to top of table.....	19 1/8"	20 1/8"	20 1/8"
Minimum distance from centerline of spindle to top of table.....	0"	0"	0"
FULL WIDTH			
Column to brace.....	30 1/4"	33 1/2"	38 1/4"
Column to inside of outer arbor support bushing—with brace in place.....	26 3/8"	29 9/8"	34 3/8"
OVERARM—Rectangular			
Distance from under-side to centerline of arbor.....	6 1/8"	7 3/8"	7 3/8"
ARBOR SUPPORTS—Aluminum; Self-oiling. (See standard equipment list below)			
Number.....	2	2	2
SPINDLE—Chrome nickel steel			
Flanged end with standard taper hole.....	No. 50	No. 50	No. 50
Diameter of nose.....	5 1/8"	5 1/8"	5 1/8"
Size of hole through.....	1 1/8"	1 1/8"	1 1/8"
Speeds, r.p.m. (twenty-one in approximate geometrical progression).....	20, 25, 32, 39, 47, 59, 74, 92, 114, 142, 178, 220, 270, 333, 414, 515, 635, 780, 970, 1200, 1500	18, 22, 27, 34, 41, 51, 63, 78, 97, 122, 152, 188, 230, 286, 357, 445, 550, 675, 840, 1045, 1300	18, 22, 27, 34, 41, 51, 63, 78, 97, 122, 152, 188, 230, 286, 357, 445, 550, 675, 840, 1045, 1300
Reverse.....	Yes	Yes	Yes
FEEDS—Inches per minute			
Number of feeds.....	32	32	32
Range—Table and cross feeds.....	1/32" to 40"	1/32" to 40"	1/32" to 40"
Low Series—1/32 to 20= 1/32, 3/64, 1/16, 1 1/32, 1 1/16, 2 1/32, 2 1/16, 3 1/32, 4 1/32, 5 1/32, 7 1/32, 9 1/32, 12 1/32, 15 1/32, 20.			
High Series—1 to 40= 1, 1 1/4, 1 1/2, 2, 2 1/4, 3 1/4, 4 1/4, 5 1/2, 7 1/4, 9 1/4, 11 1/2, 15 1/4, 19 1/4, 24 1/4, 30 1/4, 40.			
Full range of feeds is obtained by shifting auxiliary lever located on right side of machine (bracket of knee).			
Vertical feeds are 8/10 of table and cross feeds given above.			
OPERATING CONTROLS			
Hand cross, longitudinal and vertical adjustments.....	Front and Rear	Front and Rear	Front and Rear
Speed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Feed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Single independent cross, longitudinal and vertical power feeds.....	Front and Rear	Front and Rear	Front and Rear
Spindle start and stop.....	Front and Rear	Front and Rear	Front and Rear
Power rapid traverse in all directions with spindle stationary or running.....	Front and Rear	Front and Rear	Front and Rear
POWER RAPID TRAVERSE RATES. Inches per minute			
Longitudinal.....	100"	100"	100"
Cross.....	100"	100"	100"
Vertical.....	80"	80"	80"
DRIVE			
Pulley speed.....	600 r.p.m.	600 r.p.m.	600 r.p.m.
Horsepower rating (Also see "Electrical Equipment Specifications").....	5-7 1/2 h.p.	7 1/2-10 h.p.	10-15 h.p.
LUBRICATION			
Column and knee.....	Automatic Oil Shot	Automatic Oil Shot	Automatic Oil Shot
Saddle and table.....	Multiple Disc, Oil	Multiple Disc, Oil	Multiple Disc, Oil
CLUTCH			
FLOOR SPACE			
Area.....	98"x97 1/8"	114"x114"	138"x118"
SHIPPING WEIGHTS AND DATA—All weights are for enclosed multiple "V" belt motor drive or chain motor drive, exclusive of motor and control equipment.			
Net weight.....	6,350 lbs.	8,480 lbs.	9,150 lbs.
Gross weight, domestic.....	7,350 lbs.	9,530 lbs.	10,500 lbs.
Gross weight, export.....	7,550 lbs.	9,880 lbs.	10,900 lbs.
Approximate size of case.....	88"x74"x52"	94"x80"x52"	100"x84"x54"
Approximate cubic feet.....	196	227	263
CODE NAME—Chain motor drive, exclusive of motor.	HISDI	HISEE	HICIK
CODE NAME—Enclosed multiple "V" belt drive, exclusive of motor.	HIALP	HIBVE	HITIP
(Supplied as standard equipment unless otherwise specified).			

STANDARD EQUIPMENT—Supplied with the machine

ARBOR SUPPORTS: No. 2 Millers—one Style "B" with 2 1/8" adjustable arbor bushing and provided with lug for brace—one Style "A" with adjustable arbor bushing for pilot end arbors. Nos. 3 and 4 Millers—one Style "B" with 2 1/8" adjustable arbor bushing without lug for brace—one style "B" with 2 1/8" adjustable arbor bushing and provided with lug for brace.

ADJUSTABLE ARBOR TIGHTENING ROD.

ARBOR SUPPORT BUSHING ADAPTER M-01 (includes adjustable bushing, nut, washer, and screw) for Style "A" arbors, Nos. 3 and 4 Machines only.


WRENCHES.

COOLANT PUMP.

OVERARM BRACE.

SPECIFICATIONS FOR CINCINNATI UNIVERSAL

DIMENSIONAL DRAWING

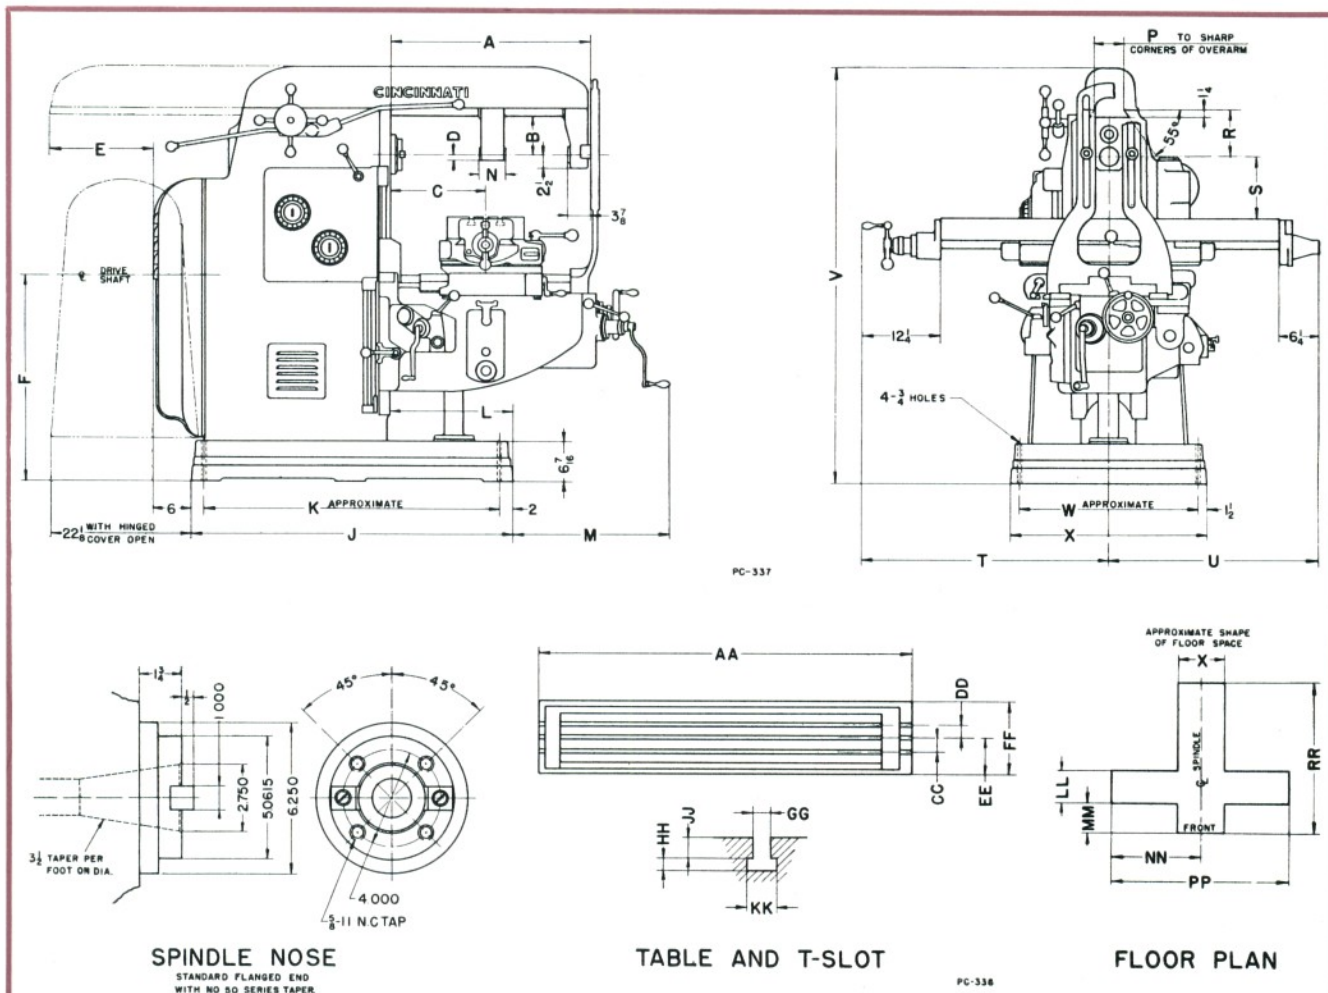

Size of Machine	A	B	C		D	E	F	J	K	L	M	N	P	R	S		T			Size of Machine
			Min.	Max.											Min.	Max.				
No. 2	30¼	6½	9½	19⅞	⅔	16½	32⅞	50¼	46¼	19	26⅞	4	4½	7⅝	0	18⅞	22⅞	50½	No. 2
No. 3	33½	7⅝	11⅞	23⅞	1½	18¾	33½	59	55	20¾	27½	4⅞	6	8⅝	0	19⅞	23¾	57⅝	No. 3
No. 4	38¼	7⅝	11⅞	25⅞	1½	22½	33½	59	55	20¾	32⅞	4⅞	6	8⅝	0	19⅞	27¼	69¾	No. 4
Size of Machine	U		V	W	X	AA	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP	RR	Size of Machine
	Min.	Max.																		
No. 2	20¼	48¾	64½	27½	30½	52½	2⅞	2⅞	6	12¼	½	½	⅔	1¼	22⅞	19⅞	50½	99½	99⅞	No. 2
No. 3	23¼	57¾	70⅞	29½	32½	62½	3¼	3¼	7½	15¼	½	⅝	1	1½	27½	17⅞	57¾	115½	111¼	No. 3
No. 4	27¼	69¾	70½	29½	32½	78½	3¼	3¼	8	16¼	½	⅝	1	1½	30⅞	19⅞	69¾	139½	119¼	No. 4

EQUIPMENT SUPPLIED AT EXTRA COST

ARBOR SUPPORTS: (a) Style "B" with 2 1/8" adjustable arbor bushing without lug for brace for use on No. 2 Machine. (b) Style "A" with Adjustable arbor bushing for pilot end arbors, for use on Nos. 3 and 4 Machines.

LONG AND SHORT LEAD ATTACHMENT with a range .010" to 1000" or .024 to 2400 centimeters. Must be installed at factory before machine is shipped.

VICES, CHUCKS, AND CHUCK ADAPTERS: See "Attachments".

ARBORS, ADAPTERS, COLLETS; QUICK CHANGE ADAPTERS: See page 25.

STANDARD ATTACHMENTS: See pages 22, 23 and 24.

HIGH-SPEED DIAL TYPE MILLING MACHINES

GENERAL SPECIFICATIONS (MODEL ER)

	No. 2 Universal	No. 3 Universal	No. 4 Universal
TABLE			
Working surface.....	52 1/8" x 12 1/4"	62 1/2" x 15 1/4"	78 1/2" x 16 1/4"
Size over all.....	52 1/8" x 12 1/4"	62 1/2" x 15 1/4"	78 1/2" x 16 1/4"
T-slots (number and size).....	Three—1 1/8"	Three—1 1/8"	Three—1 1/8"
Distance between T-slots.....	2 1/8"	3 1/4"	3 1/4"
Swivels—Right or left.....	45°	47°	49°
RANGE			
Longitudinal.....	28"	34"	42"
Cross.....	10"	12"	14"
Vertical.....	18"	19"	19"
Maximum distance from centerline of spindle to top of table.....	18 1/8"	19 1/8"	19 1/8"
Minimum distance from centerline of spindle to top of table.....	0"	0"	0"
FULL WIDTH			
Column to brace.....	30 1/4"	33 1/2"	38 1/4"
Column to inside of outer arbor support bushing—with brace in place.....	26 3/8"	29 3/8"	34 3/8"
OVERARM—Rectangular			
Distance from under-side to centerline of arbor.....	6 1/8"	7 3/8"	7 3/8"
ARBOR SUPPORTS—Aluminum, Self-oiling. (See standard equipment list below)			
Number.....	2	2	2
DIVIDING HEAD. (See standard equipment list below)			
Swing.....	10"	12"	14"
Take in length.....	28"	36 1/2"	52 1/2"
SPINDLE—Chrome nickel steel			
Flanged end with standard taper hole.....	No. 50	No. 50	No. 50
Diameter of nose.....	5 1/8"	5 1/8"	5 1/8"
Size of hole through.....	1 1/8"	1 1/8"	1 1/8"
Speeds, r.p.m. (twenty-one in approximate geometrical progression).....	20, 25, 32, 39, 47, 59, 74, 92, 114, 142, 178, 220, 270, 333, 414, 515, 635, 780, 970, 1200, 1500	18, 22, 27, 34, 41, 51, 63, 78, 97, 122, 152, 188, 230, 286, 357, 445, 550, 675, 840, 1045, 1300	18, 22, 27, 34, 41, 51, 63, 78, 97, 122, 152, 188, 230, 286, 357, 445, 550, 675, 840, 1045, 1300
	Yes	Yes	Yes
Reverse			
FEEDS—Inches per minute			
Number of feeds.....	32	32	32
Range—Table and cross feeds.....	1/32" to 40"	1/32" to 40"	1/32" to 40"
Low Series—1/32" to 20"= 1/32, 1/16, 1/8, 1/4, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2, 2 1/4, 3, 3 1/2, 4, 5, 5 1/2, 6, 7, 8, 9, 10, 12, 15, 20.			
High Series—1 to 40"= 1, 1 1/4, 1 1/2, 2, 2 1/4, 3, 3 1/2, 4, 5, 5 1/2, 6, 7, 8, 9, 10, 11, 12, 15, 18, 19 1/2, 24 1/2, 40.			
Full range of feeds is obtained by shifting an auxiliary lever located on right side of machine (bracket on knee).			
Vertical feeds are 8/10 of table and cross feeds given above.			
OPERATING CONTROLS			
Hand cross, longitudinal and vertical adjustments.....	Front and Rear	Front and Rear	Front and Rear
Speed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Feed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Single independent cross, longitudinal and vertical power feeds.....	Front and Rear	Front and Rear	Front and Rear
Spindle start and stop.....	Front and Rear	Front and Rear	Front and Rear
Power rapid traverse in all directions with spindle stationary or running.....	Front and Rear	Front and Rear	Front and Rear
POWER RAPID TRAVERSE RATES—Inches per minute			
Longitudinal.....	100"	100"	100"
Cross.....	100"	100"	100"
Vertical.....	80"	80"	80"
DRIVE			
Pulley—Speed.....	600 r.p.m.	600 r.p.m.	600 r.p.m.
Horsepower rating (Also see "Electrical Equipment Specifications").....	5-7 1/2 h.p.	7 1/2-10 h.p.	10-15 h.p.
LUBRICATION			
Column and knee.....	Automatic Oil-Shot	Automatic Oil-Shot	Automatic Oil-Shot
Saddle and table.....	Multiple Disc, Oil	Multiple Disc, Oil	Multiple Disc, Oil
CLUTCH			
FLOOR SPACE			
Area.....	98' x 97' 1/2"	114' x 114"	138' x 118"
	66 sq. ft.	90 sq. ft.	113 sq. ft.
SHIPPING WEIGHTS AND DATA—All weights are for enclosed multiple "V" belt motor drive or chain motor drive, exclusive of motor and control equipment.			
Net weight.....	6,700 lbs.	9,100 lbs.	10,100 lbs.
Gross weight.....	7,800 lbs.	10,400 lbs.	11,500 lbs.
Gross weight, export.....	8,000 lbs.	10,750 lbs.	11,900 lbs.
Approximate size of case.....	88" x 74" x 52"	94" x 80" x 52"	100" x 84" x 64"
Approximate cubic feet.....	196	227	312
CODE NAME—Chain motor drive, exclusive of motor.	HISIA	HISGA	HISOJ
CODE NAME—Enclosed Multiple "V" belt drive, exclusive of motor.	HIMUL	HIVEB	HIPLE
(Supplied as standard equipment unless otherwise specified.)			

STANDARD EQUIPMENT—Supplied with the machine

ARBOR SUPPORTS No. 2 Millers—one Style "B" with 2 1/8" adjustable arbor bushing and provided with lug for brace—one Style "A" with adjustable arbor bushing for pilot end arbors. Nos. 3 and 4 Millers—one Style "B" with 2 1/8" adjustable arbor bushing without lug for brace—one Style "B" with 2 1/8" adjustable arbor bushing and provided with lug for brace.

ADJUSTABLE ARBOR TIGHTENING ROD.

ARBOR SUPPORT BUSHING ADAPTER M-01 (includes adjustable bushing, nut, washer and screw) for Style "A" arbors, Nos. 3 and 4 Machines only.

WRENCHES.


COOLANT PUMP.

STANDARD UNIVERSAL DIVIDING HEAD EQUIPMENT, including tailstock with 2-point adjustable center; steady rest; one plate for indexing through 40 to 1 reduction—all numbers up to and including 60, all even numbers and those divisible by 5 up to 120, and many beyond; one plate for direct indexing; one center for headstock; and provision for connecting head to enclosed driving mechanism segment. Sizes (nominal swing): 10" for No. 2 Machine; 12" for No. 3 Machine; 14" for No. 4 Machine.

ENCLOSED DRIVING MECHANISM SEGMENT, including change gears for spiral milling, leads range from 2 1/2" to 100" (only) for Standard Universal Dividing Heads.

OVERARM BRACE.

SPECIFICATIONS FOR CINCINNATI VERTICAL DIMENSIONAL DRAWING

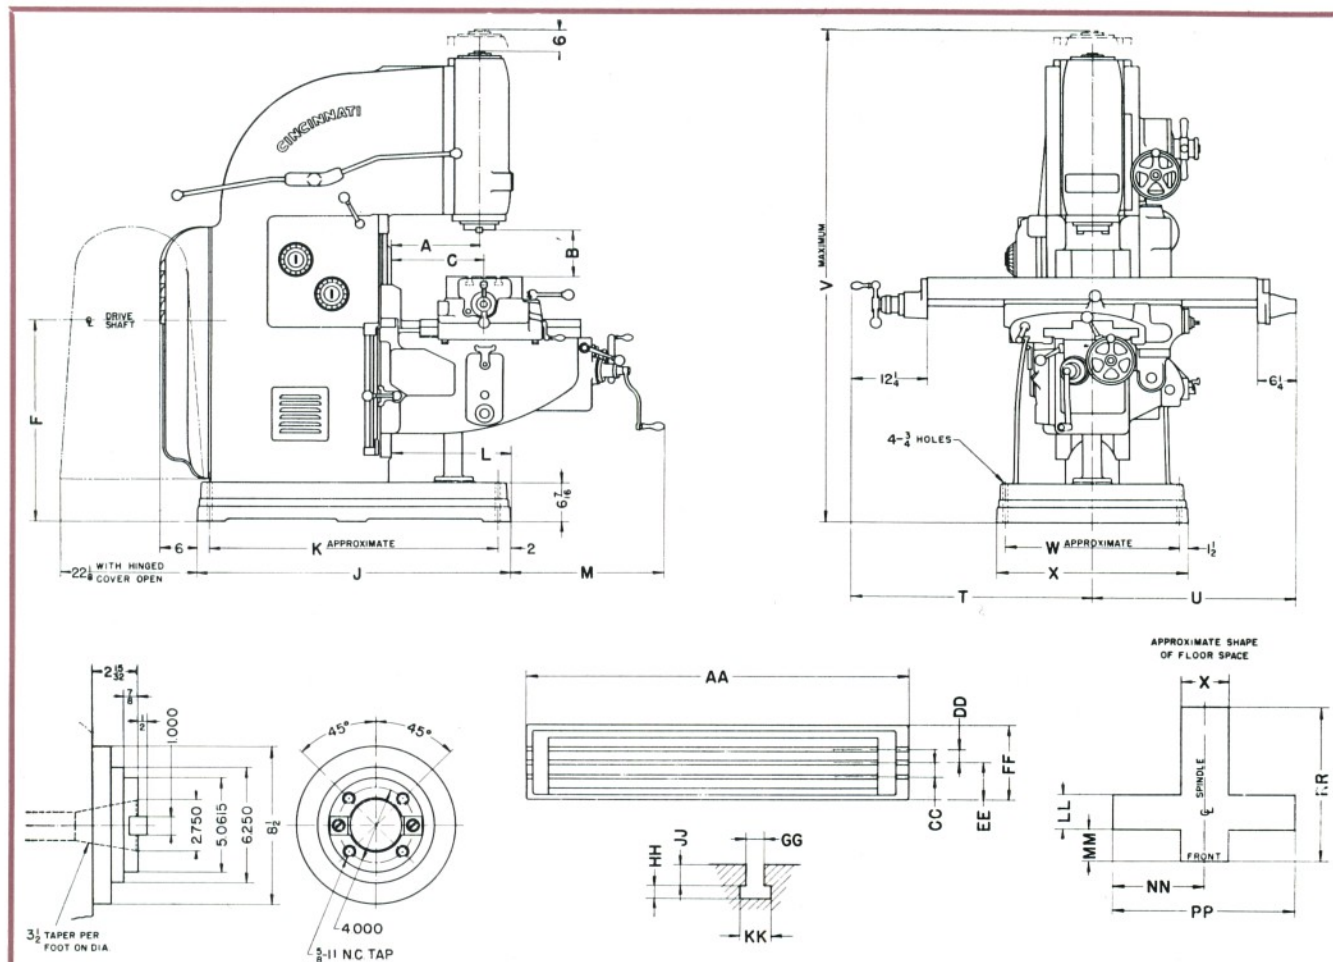

SPINDLE NOSE

STANDARD FLANGED END
WITH NO 50 SERIES TAPER

TABLE AND T-SLOT

FLOOR PLAN

WITH NO. 50 SERIES TAPER																	
Size of Machine	A	B		C		F	J	K	L	M	T		U		V	W	Size of Machine
		Min.	*Max.	Min.	Max.						Min.	Max.	Min.	Max.			
No. 2	14	0	18 $\frac{1}{8}$	9 $\frac{1}{8}$	21 $\frac{1}{2}$	33 $\frac{1}{8}$	50 $\frac{1}{4}$	46 $\frac{1}{4}$	19	26 $\frac{1}{8}$	22 $\frac{1}{8}$	50 $\frac{1}{8}$	20 $\frac{3}{8}$	49 $\frac{1}{8}$	78 $\frac{1}{8}$	27 $\frac{1}{2}$	No. 2
No. 3	18	0	22 $\frac{1}{8}$	10 $\frac{1}{8}$	27 $\frac{1}{2}$	38 $\frac{3}{8}$	59	55	20 $\frac{3}{4}$	30 $\frac{1}{8}$	27 $\frac{1}{4}$	57 $\frac{1}{4}$	23 $\frac{1}{4}$	57 $\frac{3}{4}$	85 $\frac{3}{4}$	29 $\frac{1}{2}$	No. 3
No. 4	18	0	22 $\frac{1}{8}$	11 $\frac{1}{4}$	27 $\frac{1}{2}$	38 $\frac{3}{8}$	59	55	20 $\frac{3}{4}$	30 $\frac{1}{8}$	27 $\frac{1}{4}$	69 $\frac{3}{4}$	27 $\frac{1}{4}$	69 $\frac{3}{4}$	85 $\frac{3}{4}$	29 $\frac{1}{2}$	No. 4
Size of Machine	X	AA	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP	RR		Size of Machine
No. 2	30 $\frac{1}{2}$	52 $\frac{1}{8}$	2 $\frac{1}{8}$	2 $\frac{1}{8}$	6	12 $\frac{1}{4}$	$\frac{1}{8}$	$\frac{1}{8}$	$\frac{3}{8}$	1 $\frac{1}{4}$	24 $\frac{1}{8}$	17 $\frac{1}{8}$	50 $\frac{1}{8}$	99 $\frac{1}{8}$	98 $\frac{3}{4}$	No. 2
No. 3	32 $\frac{1}{2}$	62 $\frac{1}{2}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	7 $\frac{1}{2}$	15 $\frac{1}{4}$	$\frac{1}{8}$	$\frac{5}{8}$	1	1 $\frac{1}{8}$	31 $\frac{1}{8}$	16 $\frac{1}{8}$	57 $\frac{3}{4}$	115 $\frac{1}{2}$	111 $\frac{3}{8}$	No. 3
No. 4	32 $\frac{1}{2}$	78 $\frac{1}{2}$	3 $\frac{1}{4}$	3 $\frac{1}{4}$	8	16 $\frac{1}{4}$	$\frac{1}{8}$	$\frac{5}{8}$	1	1 $\frac{1}{8}$	32 $\frac{1}{2}$	15 $\frac{1}{8}$	69 $\frac{3}{4}$	139 $\frac{1}{2}$	111 $\frac{3}{8}$	No. 4

*NOTE—Maximum dimension "B" is with head in extreme up position and knee in extreme down position.

EQUIPMENT SUPPLIED AT EXTRA COST

STANDARD UNIVERSAL DIVIDING HEAD EQUIPMENT, including tailstock with 2-point adjustable center; steady rest; one plate for indexing through 40 to 1 reduction—all numbers up to and including 60, all even numbers and those divisible by 5 up to 120, and many beyond; one plate for direct indexing; one center for headstock; and provision for connecting head to enclosed driving mechanism segment. Sizes (nominal swing): 10" for No. 2 Machine; 12" for No. 3 Machine; 14" for No. 4 Machine.

ENCLOSED DRIVING MECHANISM SEGMENT, including change gears for spiral milling, leads range from 2 1/2" to 100" (only) for Standard Universal Dividing Heads.

POWER FEED AND POWER RAPID TRAVERSE to the Vertical Head.

TURRET STOP, four-position with dial indicator.

REAR HAND ADJUSTMENTS AND REAR POWER FEED CONTROLS: Cross and vertical, supplied at factory only. (Not supplied as standard equipment on Vertical Machines.)

VICES, CHUCKS, AND CHUCK ADAPTERS: See "Attachments".

ARBORS, ADAPTERS, COLLETS; QUICK CHANGE ADAPTERS: See page 25.

STANDARD ATTACHMENTS: See pages 22, 23 and 24.

HIGH-SPEED DIAL TYPE MILLING MACHINES

GENERAL SPECIFICATIONS (MODEL ER)

	No. 2 Vertical	No. 3 Vertical	No. 4 Vertical
TABLE			
Working surface.....	52 11"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
Size over all.....	52 11"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
T-slots (number and size).....	Three—1 1/8"	Three—1 1/8"	Three—1 1/8"
Distance between T-slots.....	2 1/8"	3 1/4"	3 3/4"
RANGE			
Longitudinal.....	28"	34"	42"
Cross.....	12"	16"	16"
Vertical.....	13"	16"	16"
Head travel.....	6"	6"	6"
Distance from spindle nose to top of table.....	18"	22"	22"
Throat distance, centerline of spindle to column.....	14"	18"	18"
SPINDLE —Chrome nickel steel			
Flanged end with standard taper hole.....	No. 50	No. 50	No. 50
Diameter of nose.....	5 1/8"	5 1/8"	5 1/8"
Size of hole through.....	1 1/8"	1 1/8"	1 1/8"
Speeds, r.p.m. (twenty-one in approximate geometrical progression).....	20, 25, 32, 39, 47, 59, 74, 92, 114, 142, 178, 220, 270, 333, 414, 515, 635, 780, 970, 1200, 1500	18, 22, 27, 34, 41, 51, 63, 78, 97, 122, 152, 188, 230, 286, 357, 445, 550, 675, 840, 1045, 1300	18, 22, 27, 34, 41, 51, 63, 78, 97, 122, 152, 188, 230, 286, 357, 445, 550, 675, 840, 1045, 1300
Reverse.....	Yes	Yes	Yes
FEEDS —Inches per minute			
Number of feeds.....	32	32	32
Range, table and cross feeds.....	1/2" to 40"	1/2" to 40"	1/2" to 40"
Low Series—1/2 to 20=1/2, 3/8, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2, 2 1/4, 3, 3 1/2, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20			
High Series—1 to 40=1, 1 1/4, 1 1/2, 2, 2 1/4, 3, 3 1/2, 4, 5, 6, 7, 8, 9, 10, 12, 15, 18, 20, 24, 30, 40			
Full range of feeds is obtained by shifting an auxiliary lever located on right side of machine (bracket on knee).			
Vertical feeds are 8/10 of table and cross feeds given above.			
OPERATING CONTROLS			
Hand cross and vertical adjustments.....	Front	Front	Front
Hand longitudinal adjustment.....	Front and Rear	Front and Rear	Front and Rear
Speed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Feed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Single independent cross and vertical power feeds.....	Front	Front	Front
Single independent longitudinal power feed.....	Front and Rear	Front and Rear	Front and Rear
Spindle start and stop.....	Front and Rear	Front and Rear	Front and Rear
Power rapid traverse in all directions with spindle stationary or running.....	Front and Rear	Front and Rear	Front and Rear
Rear hand adjustments, cross and vertical; rear power feed controls, cross and vertical are supplied only on request and at extra cost.	Front and Rear	Front and Rear	Front and Rear
POWER RAPID TRAVERSE RATES —Inches per minute			
Longitudinal.....	100"	100"	100"
Cross.....	100"	100"	100"
Vertical.....	80"	80"	80"
POWER TRAVERSE TO HEAD. (Supplied at extra cost)			
Number of feeds.....	16	16	16
Feed rates.....	.6 Dial Readings	.6 Dial Readings	.6 Dial Readings
Feed range.....	.3" to 12"	.3" to 12"	.3" to 12"
Rapid traverse rate (inches per minute).....	31	31	31
DRIVE			
Pulley speed.....	600 r.p.m.	600 r.p.m.	600 r.p.m.
Horsepower rating. (Also see "Electrical Equipment Specifications").....	5-7 1/2 h.p.	7 1/2-10 h.p.	10-15 h.p.
LUBRICATION			
Column and knee.....	Automatic	Automatic	Automatic
Saddle and table.....	Oil-Shot	Oil-Shot	Oil-Shot
CLUTCH			
FLOOR SPACE	Multiple Disc, Oil	Multiple Disc, Oil	Multiple Disc, Oil
Area.....	98' x 79 1/4'	114' x 93 3/4'	138' x 95'
SHIPPING WEIGHTS AND DATA —All weights are for enclosed multiple "V" belt motor drive or chain motor drive, exclusive of motor and control equipment.			
Net weight.....	7,100 lbs.	9,300 lbs.	9,950 lbs.
Gross weight, domestic.....	8,300 lbs.	10,200 lbs.	10,800 lbs.
Gross weight, export.....	8,500 lbs.	10,900 lbs.	11,550 lbs.
Approximate size of case.....	88" x 84" x 62"	100" x 90" x 54"	100" x 90" x 54"
Approximate cubic feet.....	223	282	282
CODE NAME —Enclosed chain motor drive, exclusive of motor.....	HILAC	HISAR	HISHT
CODE NAME —Enclosed multiple "V" belt drive, exclusive of motor.....	HIELT	HIOPT	HIQUI
(Supplied as standard equipment unless otherwise specified on order)			

STANDARD EQUIPMENT—Supplied with the machine

ADJUSTABLE ARBOR TIGHTENING ROD

WRENCHES.

COOLANT PUMP*



SPECIFICATIONS FOR CINCINNATI

PLAIN MEDIUM SPEED

GENERAL SPECIFICATIONS (MODEL ER)

	No. 2 Plain	No. 3 Plain	No. 4 Plain
TABLE			
Working surface.....	52 1/4"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
Size over all.....	52 1/4"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
T-slots (number and size).....	Three—1 1/8"	Three—1 1/8"	Three—1 1/8"
Distance between T-slots.....	2 1/8"	3 1/4"	3 1/4"
RANGE			
Longitudinal.....	28"	34"	42"
Cross.....	10"	12"	14"
Vertical.....	19"	20"	20"
Maximum distance from centerline of spindle to top of table.....	19 3/8"	20 1/8"	20 1/8"
Minimum distance from centerline of spindle to top of table.....	0"	0"	0"
FULL WIDTH			
Column to brace.....	30 1/4"	33 1/2"	38 1/4"
Column to inside of outer arbor support bushing—with brace in place.....	26 3/8"	29 5/8"	34 3/8"
OVERARM—Rectangular			
Distance to centerline of arbor.....	6 1/8"	7 3/8"	7 3/8"
ARBOR SUPPORTS—Aluminum, Self-oiling. (See standard equipment list on page 17)			
Number.....	2	2	2
SPINDLE—Chrome nickel steel			
Flanged end with standard taper hole.....	No. 50	No. 50	No. 50
Diameter of nose.....	5 1/8"	5 1/8"	5 1/8"
Size of hole through.....	1 1/2"	1 1/2"	1 1/2"
Speeds, r.p.m. (sixteen in approximate geometrical progression).....	20, 26, 32, 40, 47, 60, 74, 92, 116, 141, 179, 222, 262, 331, 414, 500	18, 22, 27, 33, 40, 51, 63, 78, 96, 123, 151, 187, 223, 281, 350, 450	18, 22, 27, 33, 40, 51, 63, 78, 96, 123, 151, 187, 223, 281, 350, 450
Reverse.....	Yes	Yes	Yes
FEEDS—Inches per minute			
Number of feeds.....	16	16	16
Range—Table and cross feeds			
Low Series—(Optional at factory).....	1/4" to 10"	1/4" to 10"	1/4" to 10"
Standard Series—(Optional at factory).....	1/2" to 20"	1/2" to 20"	1/2" to 20"
Vertical feeds are 8/10 of table and cross feeds given above.			
OPERATING CONTROLS			
Hand cross, longitudinal and vertical adjustments.....	Front and Rear	Front and Rear	Front and Rear
Speed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Feed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Single independent cross, longitudinal and vertical power feeds.....	Front and Rear	Front and Rear	Front and Rear
Spindle start and stop.....	Front and Rear	Front and Rear	Front and Rear
Power rapid traverse in all directions with spindle stationary or running.....	Front and Rear	Front and Rear	Front and Rear
POWER RAPID TRAVERSE RATES—Inches per minute. (For standard feed series machines).			
Longitudinal.....	100"	100"	100"
Cross.....	100"	100"	100"
Vertical.....	80"	80"	80"
DRIVE			
Pulley speed.....	600 r.p.m.	600 r.p.m.	600 r.p.m.
Horsepower rating. (Also see "Electrical Equipment Specifications").....	5-7 1/2 h.p.	7 1/2-10 h.p.	10-15 h.p.
LUBRICATION			
Column and knee.....	Automatic	Automatic	Automatic
Saddle and table.....	Oil Shot	Oil Shot	Oil Shot
CLUTCH			
FLOOR SPACE			
Area.....	Multiple Disc, Oil 98"x97 1/8" 66 sq. ft.	Multiple Disc, Oil 114"x114" 90 sq. ft.	Multiple Disc, Oil 138"x118" 113 sq. ft.
SHIPPING WEIGHTS AND DATA—All weights are for enclosed multiple "V" belt motor drive or chain motor drive, exclusive of motor and control equipment			
Net weight.....	6,250 lbs.	8,380 lbs.	9,050 lbs.
Gross weight, domestic.....	7,250 lbs.	9,430 lbs.	10,400 lbs.
Gross weight, export.....	7,450 lbs.	9,780 lbs.	10,800 lbs.
Approximate size of case.....	88"x74"x52"	94"x80"x52"	100"x84"x54"
Approximate cubic feet.....	196	227	263
CODE NAME—Enclosed chain motor drive, exclusive of motor.....	TOOMO	IMRIC	IMLEC
CODE NAME—Enclosed multiple "V" belt drive, exclusive of motor.....	TUALP	IMALP	IMENC
(Supplied as standard equipment unless otherwise specified on order.)			

DIMENSIONAL DRAWING

Same as shown on page 26

STANDARD EQUIPMENT—Supplied with the Machine

Same as listed on page 27

EQUIPMENT SUPPLIED AT EXTRA COST

Same as listed on page 26

DIAL TYPE MILLING MACHINES

UNIVERSAL MEDIUM SPEED

GENERAL SPECIFICATIONS (MODEL ER)

	No. 2 Universal	No. 3 Universal	No. 4 Universal
TABLE			
Working surface	52 1/2"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
Size over all	52 1/2"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
T-slots (number and size)	Three—1 1/2"	Three—1 1/2"	Three—1 1/2"
Distance between T-slots	2 1/8"	3 1/4"	3 1/4"
Swivels—Right or left	45°	47°	49°
RANGE			
Longitudinal	28"	34"	42"
Cross	10"	12"	14"
Vertical	18"	19"	19"
Maximum distance from centerline of spindle to top of table	18 1/8"	19 1/8"	19 1/8"
Minimum distance from centerline of spindle to top of table	0"	0"	0"
FULL WIDTH			
Column to brace	30 1/4"	33 1/4"	38 1/4"
Column to inside of outer arbor support bushing—with brace in place	26 3/8"	29 3/8"	34 3/8"
OVERARM—Rectangular			
Distance to centerline of arbor	6 1/8"	7 3/8"	7 3/8"
ARBOR SUPPORTS—Aluminum, Self-oiling. (See standard equipment list on page 19)			
Number	2	2	2
DIVIDING HEAD. (See standard equipment list on page 19)			
Swing	10"	12"	14"
Take in length	28"	36 1/2"	52 1/2"
SPINDLE—Chrome nickel steel			
Flanged end with standard taper hole	No. 50	No. 50	No. 50
Diameter of nose	5 1/8"	5 1/8"	5 1/8"
Size of hole through	1 1/8"	1 3/8"	1 3/8"
Speeds, r.p.m. (sixteen in approximate geometrical progression)	20, 26, 32, 40, 47, 60, 74, 92, 116, 144, 179, 222, 262, 331, 414, 500	18, 22, 27, 33, 40, 51, 63, 78, 96, 123, 151, 187, 223, 281, 350, 450	18, 22, 27, 33, 40, 51, 63, 78, 96, 123, 151, 187, 223, 281, 350, 450
Reverse	Yes	Yes	Yes
FEEDS—In inches per minute			
Number of feeds	16	16	16
Range—Table and cross feeds			
Low Series—(Optional at factory) 1/4, 1/8, 3/16, 1/2, 5/8, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 7, 8, 10.	1/4" to 10"	1/4" to 10"	1/4" to 10"
Standard Series—(Optional at factory) 1/2, 3/8, 1/2, 1, 1 1/8, 1 1/4, 1 1/2, 1 3/4, 2, 2 1/4, 2 1/2, 3, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 7, 8, 10, 12 1/2, 15 1/2, 20.	1/2" to 20"	1/2" to 20"	1/2" to 20"
Vertical feeds are 8/10 of table and cross feeds given above.			
OPERATING CONTROLS			
Hand cross, longitudinal and vertical adjustments	Front and Rear	Front and Rear	Front and Rear
Speed changes, by power	Front and Rear	Front and Rear	Front and Rear
Feed changes, by power	Front and Rear	Front and Rear	Front and Rear
Single independent cross, longitudinal and vertical power feeds	Front and Rear	Front and Rear	Front and Rear
Spindle start and stop	Front and Rear	Front and Rear	Front and Rear
Power rapid traverse in all directions with spindle stationary or running	Front and Rear	Front and Rear	Front and Rear
POWER RAPID TRAVERSE RATES—Inches per minute. (For standard feed series machines).			
Longitudinal	100"	100"	100"
Cross	100"	100"	100"
Vertical	80"	80"	80"
DRIVE			
Pulley speed	600 r.p.m.	600 r.p.m.	600 r.p.m.
Horsepower rating. (Also see "Electrical Equipment Specifications")	5-7 1/2 h.p.	7 1/2-10 h.p.	10-15 h.p.
LUBRICATION			
Column and knee	Automatic	Automatic	Automatic
Saddle and table	Oil-Shot	Oil-Shot	Oil-Shot
CLUTCH			
FLOOR SPACE			
Area	98"x97 1/2"	114"x114"	138"x118"
Shipping weights and data—All weights are for enclosed multiple "V" belt motor drive or chain motor drive, exclusive of motor and control equipment.	66 sq. ft.	90 sq. ft.	113 sq. ft.
Net weight	6,600 lbs.	9,000 lbs.	10,000 lbs.
Gross weight, domestic	7,700 lbs.	10,300 lbs.	11,400 lbs.
Gross weight, export	7,900 lbs.	10,650 lbs.	11,800 lbs.
Approximate size of case	88"x74"x52"	94"x89"x52"	100"x84"x64"
Approximate cubic feet	196	227	312
CODE NAME—Enclosed chain motor drive, exclusive of motor.	TULEC	IMDRI	IMFYZ
CODE NAME—Enclosed multiple "V" belt drive, exclusive of motor. (Supplied as standard equipment unless otherwise specified on order.)	TUMUL	IMUVB	IMELD

DIMENSIONAL DRAWING

Same as shown on page 28

STANDARD EQUIPMENT—Supplied with the Machine

Same as listed on page 29

EQUIPMENT SUPPLIED AT EXTRA COST

Same as listed on page 28



SPECIFICATIONS FOR CINCINNATI

VERTICAL MEDIUM SPEED

GENERAL SPECIFICATIONS (MODEL ER)

	No. 2 Vertical	No. 3 Vertical	No. 4 Vertical
TABLE			
Working surface.....	52 11/16"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
Size over all.....	52 11/16"x12 1/4"	62 1/2"x15 1/4"	78 1/2"x16 1/4"
T-slots (number and size).....	Three—1 1/2"	Three—1 1/2"	Three—1 1/2"
Distance between T-slots.....	2 3/8"	3 1/4"	3 1/4"
RANGE			
Longitudinal.....	28"	34"	42"
Cross.....	12"	16"	16"
Vertical.....	13"	16"	16"
Head travel.....	6"	6"	6"
Distance from spindle nose to top of table.....	18"	22"	22"
Throat distance, centerline of spindle to column.....	14"	18"	18"
SPINDLE —Chrome nickel steel			
Flanged end with standard taper hole.....	No. 50	No. 50	No. 50
Diameter of nose.....	5 1/8"	5 1/8"	5 1/8"
Size of hole through.....	1 1/8"	1 1/8"	1 1/8"
Speeds, r.p.m. (Sixteen in approximate geometrical progression).....	20, 26, 32, 40, 47, 60, 74, 92, 116, 141, 179, 222, 262, 331, 414, 600	18, 22, 27, 33, 40, 51, 63, 78, 96, 123, 151, 187, 223, 281, 350, 450	18, 22, 27, 33, 40, 51, 63, 78, 96, 123, 151, 187, 223, 281, 350, 450
Reverse.....	Yes	Yes	Yes
FEEDS —Inches per minute			
Number of feeds.....	16	16	16
Range—Table and cross feeds			
Low Series—(Optional at factory).....	1/4" to 10"	1/4" to 10"	1/4" to 10"
Standard Series—(Optional at factory).....	1/2" to 20"	1/2" to 20"	1/2" to 20"
Vertical feeds are 8/10 of table and cross feeds given above.			
OPERATING CONTROLS			
Hand cross and vertical adjustments.....	Front	Front	Front
Hand longitudinal adjustment.....	Front and Rear	Front and Rear	Front and Rear
Speed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Feed changes, by power.....	Front and Rear	Front and Rear	Front and Rear
Single independent cross and vertical power feeds.....	Front	Front	Front
Single independent longitudinal power feed.....	Front and Rear	Front and Rear	Front and Rear
Spindle start and stop.....	Front and Rear	Front and Rear	Front and Rear
Power rapid traverse in all directions with spindle stationary or running.....	Front and Rear	Front and Rear	Front and Rear
Rear hand adjustments, cross and vertical; rear power feed controls, cross and vertical, are supplied only on request and at extra cost.			
POWER RAPID TRAVERSE RATES. Inches per minute. (For standard feed series machines).			
Longitudinal.....	100"	100"	100"
Cross.....	100"	100"	100"
Vertical.....	80"	80"	80"
POWER TRAVERSE TO HEAD. (Supplied at extra cost)			
Number of feeds.....	16	16	16
Feed rates, for machines having standard table feeds.....	1/2 Dial Readings Same as Dial Readings	1/2 Dial Readings Same as Dial Readings	1/2 Dial Readings Same as Dial Readings
Feed rates, for machines having low table feeds.....	1/4" to 10"	1/4" to 10"	1/4" to 10"
Feed range.....	44	44	44
Rapid traverse rate, inches per minute.....			
DRIVE			
Pulley speed.....	600 r.p.m.	600 r.p.m.	600 r.p.m.
Horsepower rating. (Also see "Electrical Equipment Specifications").....	5-7 1/2 h.p.	7 1/2-10 h.p.	10-15 h.p.
LUBRICATION			
Column and knee.....	Automatic Oil-Shot	Automatic Oil-Shot	Automatic Oil-Shot
Saddle and table.....	Multiple Disc, Oil	Multiple Disc, Oil	Multiple Disc, Oil
CLUTCH			
FLOOR SPACE.			
Area.....	98"x79 1/2"	114"x93 3/4"	138"x95"
SHIPPING WEIGHTS AND DATA —All weights are for enclosed multiple "V" belt motor drive or chain motor drive, exclusive of motor and control equipment.			
Net weight.....	54.3 sq. ft.	74.1 sq. ft.	91 sq. ft.
Gross weight, domestic.....	7,050 lbs.	9,200 lbs.	9,850 lbs.
Gross weight, export.....	8,200 lbs.	10,100 lbs.	10,700 lbs.
Approximate size of case.....	8,400 lbs.	10,800 lbs.	11,450 lbs.
Approximate cubic feet.....	88"x84"x52"	100"x90"x54"	100"x90"x54"
CODE NAME —Enclosed chain motor drive, exclusive of motor.....	223	282	282
CODE NAME —Enclosed multiple "V" belt drive, exclusive of motor.....	TUTOO	IMRYE	IFORV
(Supplied as standard equipment unless otherwise specified on order)	TUVEB	IMEVE	IMMUL

DIMENSIONAL DRAWING

Same as shown on page 30

STANDARD EQUIPMENT—Supplied with the Machine

Same as listed on page 31

EQUIPMENT SUPPLIED AT EXTRA COST

Same as listed on page 30

DIAL TYPE MILLING MACHINES

ELECTRICAL EQUIPMENT

ALL SIZES OF MACHINES

Current	Cycles	Phase	Voltage	Speed R.P.M.
A. C.	60	2 or 3	220/440/550	1800
A. C.	50	2 or 3	220/440/550	1500
A. C.	50	2 or 3	380/500/Etc.	1500
A. C.	25	2 or 3	220/440/550	1500
D. C.	115 or 230	1750

The motors and controls listed below are suitable for the machines illustrated and described in this booklet.

No. 2 Machine		Nos. 2 and 3 Machines		Nos. 3 and 4 Machines		No. 4 Machine	
H. P.	N. E. M. A. Frame	H. P.	N. E. M. A. Frame	H. P.	N. E. M. A. Frame	H. P.	N. E. M. A. Frame
5	254	7½	284	10	324	15	326
5	254	7½	284	10	324	15	326
5	254	7½	284	10	324	15	326
5	284	7½	*326	10	364	15	365
5	...	7½	...	10	...	15	...

*7½ H. P. motor, totally enclosed ball bearing, frame No. 326, can not be used on No. 2 Dial Type.

The following types of motors may be used: Open frame sleeve bearing, open frame ball bearing, and, if approved by the factory, totally enclosed ball bearing.

Motors larger than the following can not be used:

No. 2 Dial Type—N.E.M.A. frame 326.

No. 3 Dial Type—N.E.M.A. frame 364.

No. 4 Dial Type—N.E.M.A. frame 365.

A. C. MOTORS—Standard make, N.E.M.A. frame, normal torque, low starting current (normal starting current for motors 254 and 284), floor mounted with conduit box on left viewing shaft end.

A. C. CONTROLS—Standard make, enclosed type, full voltage magnetic starter with thermal overload protection. It shall include a control circuit transformer having 110 volt secondary, mounted in the same enclosing case, for all A. C. circuits over 220 volts. This provides low voltage at the push button station—a safety feature.

D. C. MOTORS—Standard make, shunt wound, constant speed, 40° C. continuous, open, rotation clockwise viewing shaft end, floor mounted with conduit box on left viewing shaft end.

D. C. CONTROLS—Standard make, enclosed type magnetic starter with definite time acceleration, thermal overload protection and without dynamic braking.

PUSH BUTTON STATION—Separate "Start-Stop" included with A. C. or D. C. controls.

ORDERING INSTRUCTIONS—The following electrical data must accompany each order:

- Voltage.
- Current (A. C. or D. C.).
- If A. C. current is specified, also include:
 - Phase.
 - Cycle.
- Horsepower, speed, and type of frame (open or totally enclosed) and motor bearing.

A delay in giving The Cincinnati Milling Machine Co. your complete and correct electrical data with your order may cause a similar delay in shipment of the machine.

If you desire The Cincinnati Milling Machine Co. to purchase and install the electrical equipment in the machine, you may specify the make, providing it conforms to the electrical specifications as listed on this page.



If you prefer to supply the electrical equipment, it must conform to the electrical specifications as listed on this page.





Dial Types in the Field...

Right—A heavy stock removal job on a No. 2 Plain High Speed Machine. Milling two sides of extension supports, reducing a spherical shape of $1\frac{3}{4}$ " diameter to a width of $\frac{13}{16}$ ".

Below—Milling the keyway in a heat-treated spiral gear. High Speed Dial Type Millers have the wide range of speeds and feeds so necessary in shops where one lot of parts may be tough, hard steel and the next lot soft aluminum.

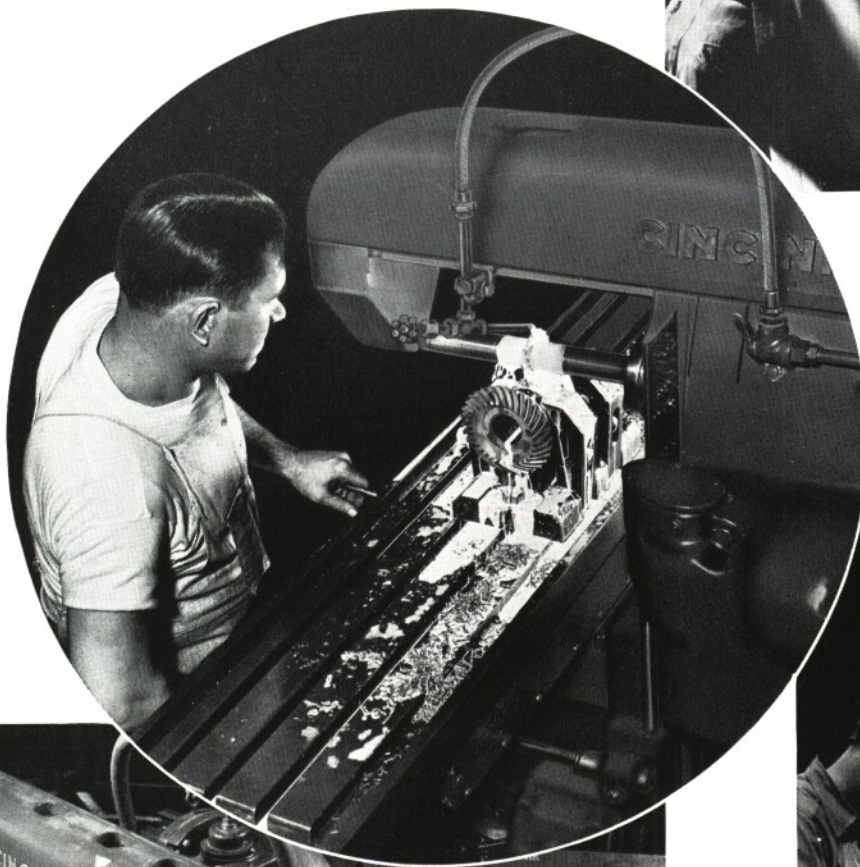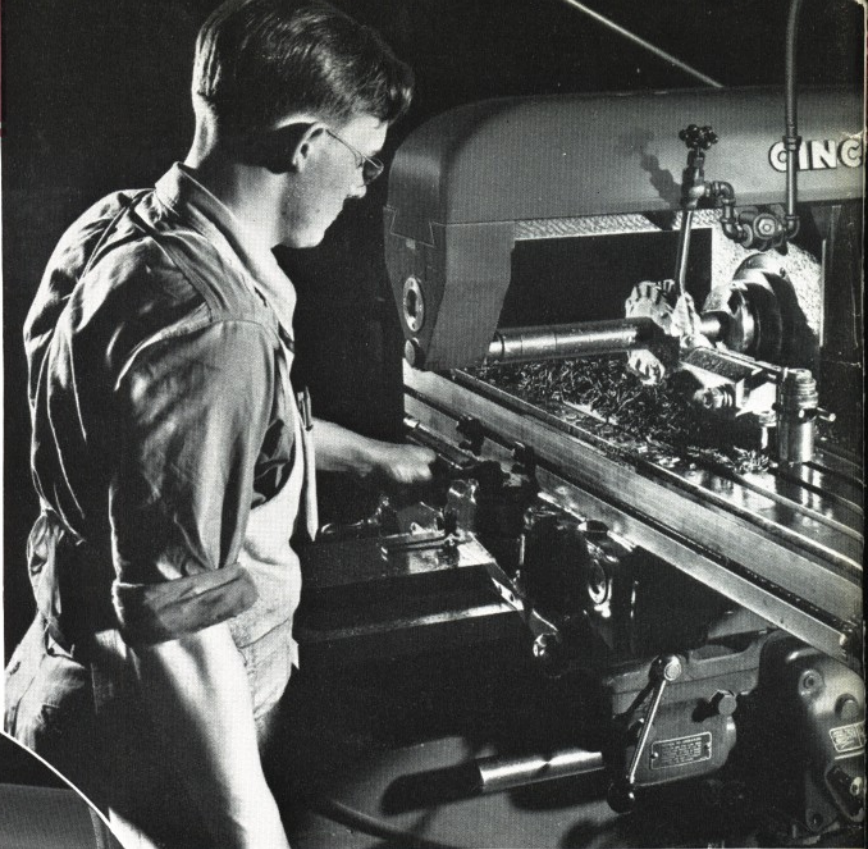

Below—A No. 3 Vertical Dial Type roughs and finishes, from the solid, a cast iron dovetail slide. The turret stop attachment at the side of the vertical head assures a close limit of accuracy between the dovetail and the top surface.

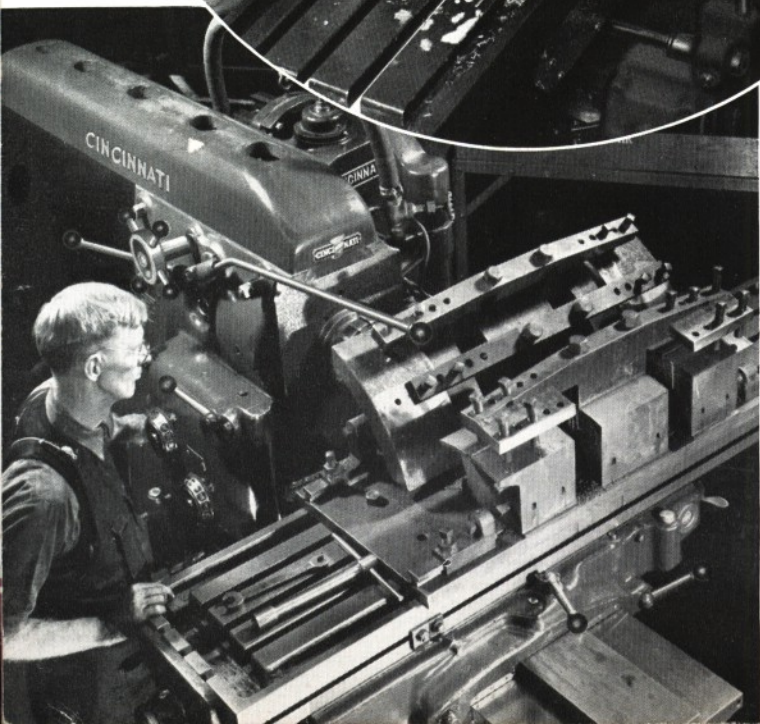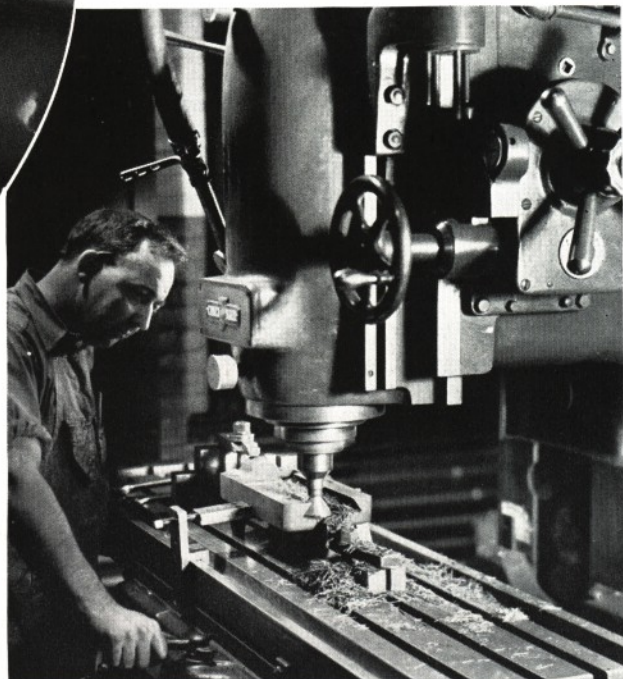

Left—The operator can always see the job on a Horizontal Dial Type, because there are complete front and rear controls. This No. 4 Plain Dial Type faces both ends of the shell section of a tire building drum.

PRINTED IN U. S. A.

THE CINCINNATI MILLING MACHINE CO.
CINCINNATI, O., U. S. A.

Supersedes M-868 M-970