




REPETITIVE HIGH PRODUCTION
ULTRA PRECISION IN THE TOOLROOM
SMALL LOT PRODUCTION

Monarch

TURNING MACHINES



THE MONARCH MACHINE TOOL COMPANY • SIDNEY, OHIO

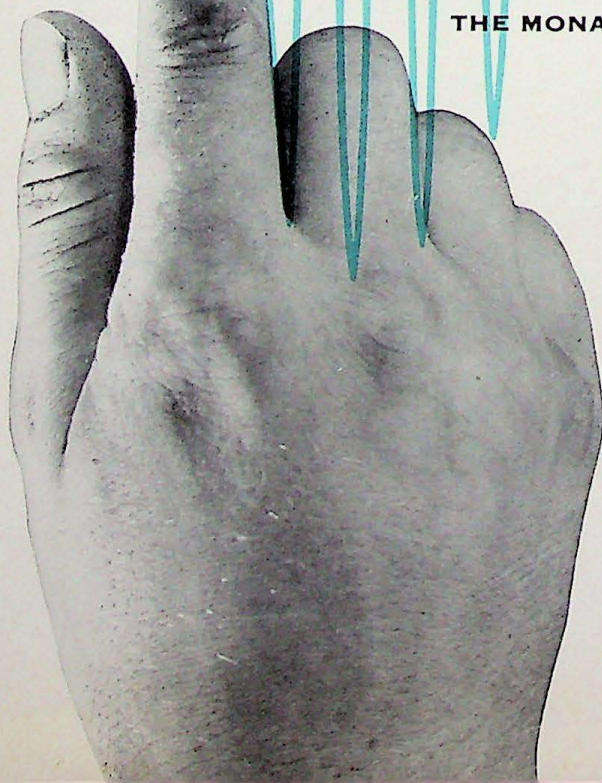

FOR A BETTER TURN FASTER

... TURN TO MONARCH


When we suggest that you turn to Monarch to satisfy your turning needs, we believe you will profit by doing so.

One reason is the broadness of the Monarch line. Each of our current models is illustrated and briefly described on the following pages. Somewhere in this extensive group of machines there must be a lathe which you can apply with profit to your turning problems. And our experienced Sales Engineers are ever willing to help.

Another reason for your consideration of our equipment is the fresh engineering thinking right from the floor up that you will find on one Monarch after another. Practical thinking that will help you out-distance rising manufacturing costs. Bold thinking that will set the pace in lathe performance for years to come.


And there's yet another reason—a most important one, too. Back of our engineering and manufacturing facilities is a research department and a development engineering department which are constantly studying, devising and perfecting new turning machines and new turning methods.

Remember, our Sales Engineers are always at your command for consultation and recommendations. More detailed literature applying to any of our equipment is yours for the asking. One last suggestion. Visit us at Sidney, Ohio. Like many others, you will see the finest machine tool plant in the world producing the lathes by which all others are judged.

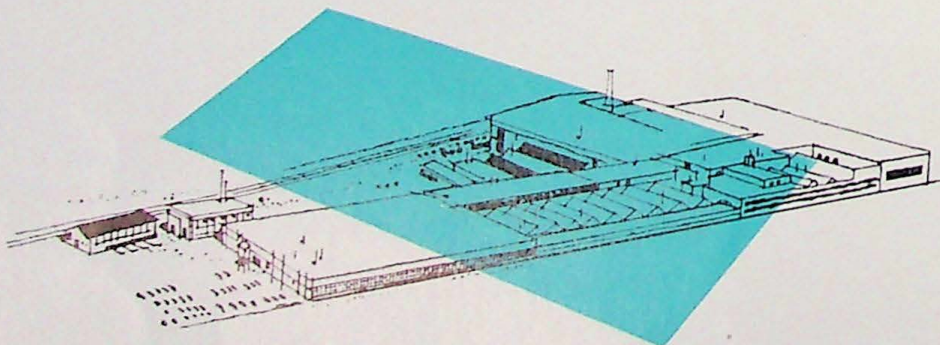



PAGE		MACHINE
4-5	1	Sensitive Precision Toolmaker's Lathe—10" Model EE
6-7	2	Precision Manufacturing Lathe—10" Model EE
6-7	3	The Speedi-Matic—a fast precision hand screw machine
8-9	4	Precision Lathe—Series EE, Model 1000
10-11-12-13	5	Preselector Dyna-Shift Lathes—Series 62
14-15	6	Engine and Toolmaker's Lathes—Series 61
16-17	7	Dyna-Shift Heavy Duty Lathes—Series 80
18-19	8	Dyna-Shift Heavy Duty Lathes—Series 90
20-21	9	Heavy Duty Lathes—Models M, N and NN
22-23	10	Mona-Matics—Models 15 and 20
24-25	11	The Mona-Matic—Model 21
26-27	12	The Hydra-Slide
28-29	13	The "Air-Gage Tracer"
30-31	14	Monarch-Keller Form Turning Machines
30-31	15	"Motor-Trace" Lathes
32-33	16	The Heavy Duty Roll-Turner
32-33	17	The Shapemaster Engraver
34	18	60" Right Angle Lathes
35	19	Monarch Representatives

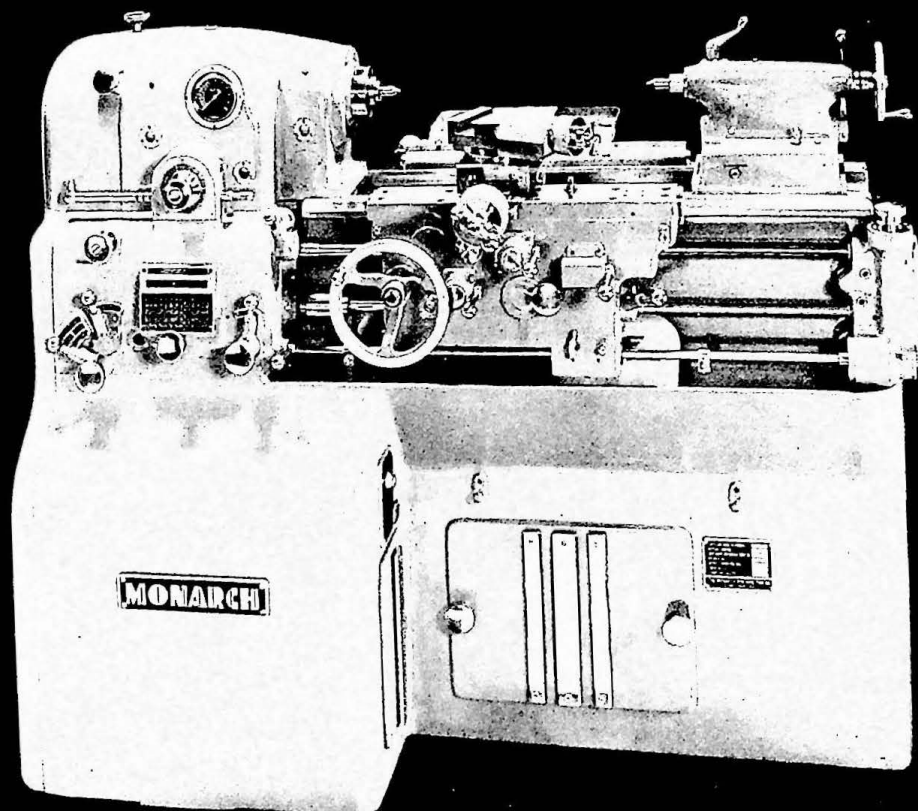

Recommended Use. A versatile, high speed, precision lathe for the toolroom. It turns, faces, bores and threads a vast variety of work to the degree of accuracy demanded by master toolmakers.

Major Features. Available with speed ranges, through open belt, up to 40 to 4000 R.P.M. Through a built-in speed reducer, this speed may be reduced to 6½ to 650 R.P.M.

All electric drive direct to spindle through multiple "V" belts. No gears in headstock.

D. C. variable speed main drive motor secures its power through an electronic unit which utilizes almost any source of A.C. Absence of revolving equipment in the power supply minimizes vibration at all speeds, practically eliminates noise, improves speed regulation regardless of load and maintains better torque at the lower speeds.

For thread chasing up to 100% faster, has exclusive combination of electric leadscrew reverse and variable reverse speed control.

The only small lathe available with anti-friction bearing taper attachment.

Easy, fatigue-free operation. Base design lets operator work close in comfort. He gets production—not backaches.

Totally enclosed, automatically lubricated end gearing and gear box.

Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

Swing over bed	12½"
Swing over cross slide	7¼"
Length between centers	20"
Floor space	29" W x 64" L
Hole through spindle	1⅜"
American standard Camlock spindle nose	3"—D-1
Spindle speed range (standard)	5 to 3000 R.P.M.
Range of threads per inch (60)	3 to 184
Range of feeds per revolution (50)	.0005" to .016"
Motor size	3 H.P.
Net weight, with average accessory equipment, including all electrical equipment	2900 lbs.




SPECIFICATIONS

SENSITIVE PRECISION TOOLMAKER'S LATHE— 10" MODEL EE

The machine illustrated on the opposite page is equipped with electric leadscrew reverse which is not standard equipment but is a great saver of time when chasing threads. Variable reverse speed control should always be specified for use with electric leadscrew reverse. The combination of these two features has increased production as much as 100% on many threading jobs.

The 10" Model EE can be made still more versatile by the use of many other available attachments. The ones most commonly employed are: taper turning attachment, follow rest, multiple index face plate, multiple positive length stop, micro-gaging dial, collet attachment and various types of collets, chucks and Metric transposing gears.

Should it be wished to use the machine for small lot production, the famous Monarch "Air-Gage Tracer" may be factory applied as additional equipment.

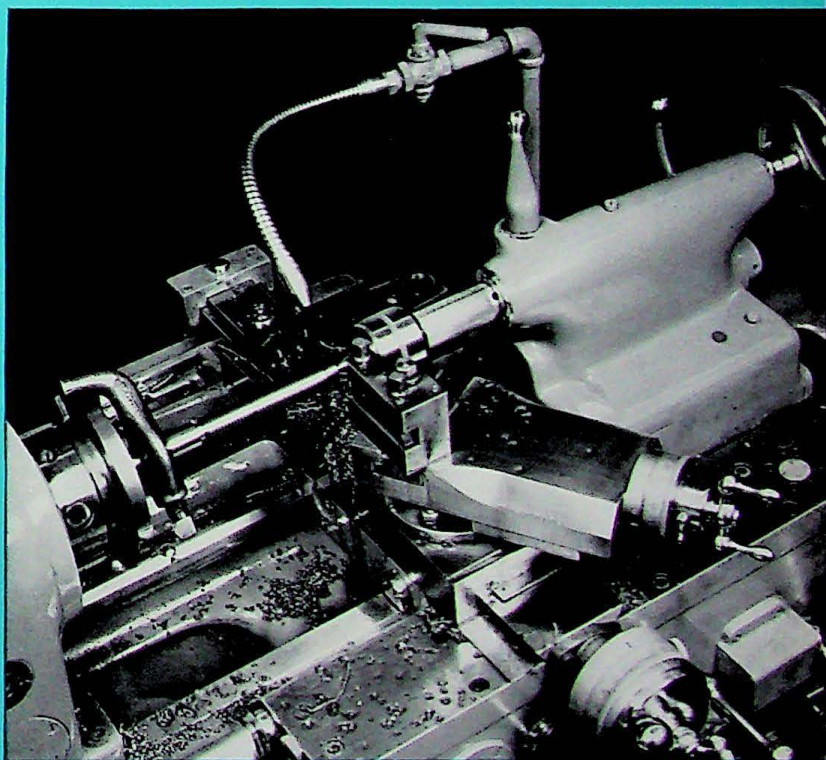


Recommended Use. This is a fast, accurate, high speed machine of wide adaptability for the production turning, boring and facing of small work pieces. An extraordinarily large choice of equipment and accessories makes it possible for the user to select the combination which will enable him to secure the utmost in productivity on his work.

Major Features. Available with speed ranges, through open belt, up to 40 to 4000 R.P.M. Through a built-in speed reducer this speed may be reduced to 6½ to 650 R.P.M. All electric drive direct to spindle through multiple "V" belts. No gears in headstock.

D.C. variable speed main drive motor secures its power through an electronic unit which utilizes almost any source of A.C.

Totally enclosed, automatically lubricated end gearing and gear box.

Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

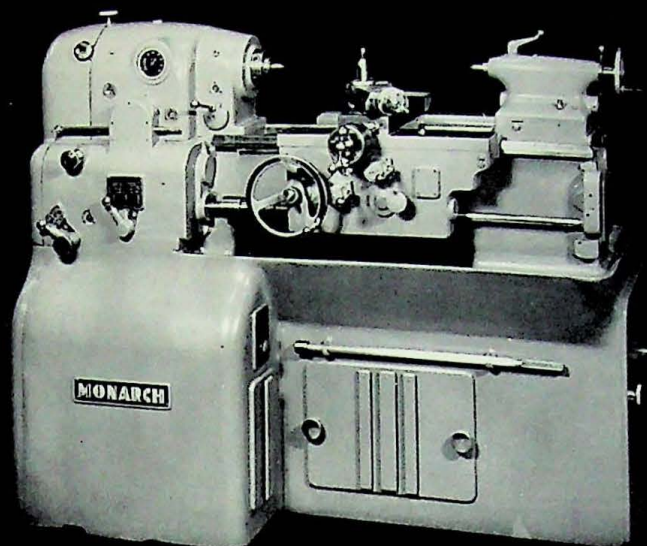




Recommended Use. For small screw machine work in quantities of 25 to 2000 or more pieces. Machining such parts, it sets a new standard of productivity, ease and quickness of set-up and repetition of close accuracy on both first and second operation work.

Major Features. Spindle has an infinitely variable range—both forward and reverse—from 40 to 4000 R.P.M. All electric drive to spindle through multiple "V" belts. No gears in headstock. D.C. variable speed main drive motor secures its power through an electronic unit.

Preselected, automatic, electronic speed and feed change. Up to 9 different speeds and 6 different feeds may be preselected with the result that the most efficient speed and feed are used for each operation. Feed and speed indicators permit quick selection of the correct speed and feed for each turret position and correct speed for each cross slide position.

Electronically controlled feed motor eliminates gear box and makes available an infinite number of feeds within the range.

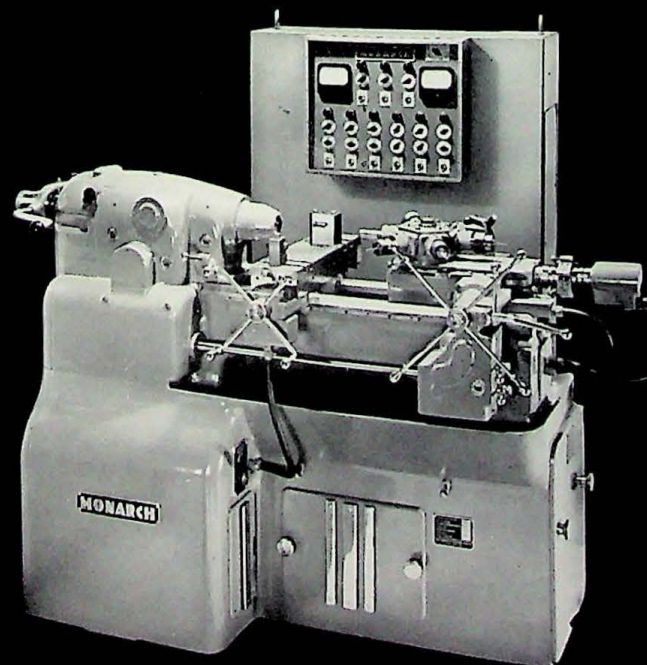

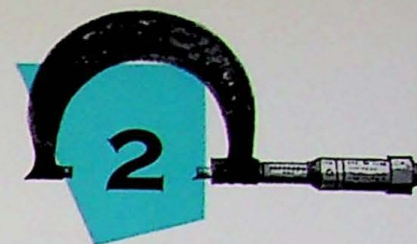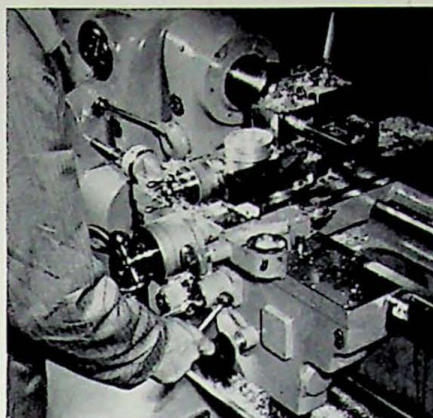


PRECISION MANUFACTURING LATHE—10" MODEL EE

SPECIFICATIONS


Swing over bed	12½"
Swing over cross slide	7¼"
Length between centers	20"
Floor space	29" W x 64" L
Hole through spindle	1⅜"
American standard Camlock spindle nose	3"—D-1
Spindle speed range (standard)	5 to 3000 R.P.M.
Range of feeds per revolution (6)	.002" to .012"
Motor size	3 H.P.
Net weight, base lathe only, including all electrical equipment	2515 lbs.

THE SPEEDI-MATIC—A Fast, Precision Hand Screw Machine

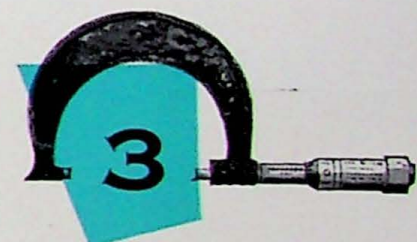

SPECIFICATIONS

Swing over bed	12½"
Floor space	48" W x 74" L
Hole through spindle	1⅜"
American standard Camlock spindle nose	3"—D-1
Spindle speed range	40 to 4000 R.P.M.
Travel of cross feed slide, either direction	2⅞"
Width of cross feed slide	5½"
Work travel of ram	4"
Infinitely variable feed range	⅛" to 16" per min.
Collet capacity	⅞"
Motor size	3 H.P.
Net weight, with average accessory equipment, including all electrical equipment	4200 lbs.

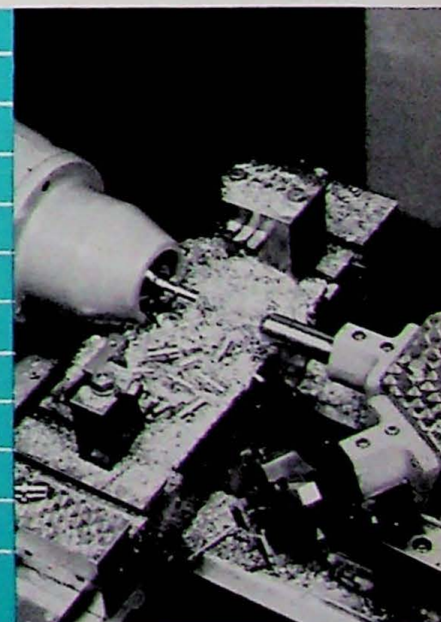

PRECISION LATHE—SERIES EE, MODEL 1000

Recommended Use. Both a manufacturing and a toolmaker's lathe. On manufacturing operations it slashes both set-up time and turning time with no sacrifice of its basic accuracy. In the toolroom, the Series EE is a precision lathe for master toolmakers with a completely new standard in amount of work output.

Major Features. Powered by a variable speed main drive motor, D.C. being provided by a rectifier system. There are four infinitely variable speed ranges—forward or reverse. High range direct through multiple "V" belts. Other three ranges are geared.

Any speed between 25 R.P.M. and 2000 R.P.M. may be secured. High speeds such as this permit maximum production on many small non-ferrous parts and they also measurably shorten polishing operations. With the direct multiple Vee belt drive in the highest speed range, they also allow the ultimate in finish to be secured.

All-electric speed control convenient to operator at apron. Shift from one speed range to another takes place automatically within a few seconds when range selector switch is reset.

Combined mist and liquid, filtered lubrication in headstock. This provides complete lubrication with a wide margin of safety even at the highest speed.

Built-in constant surface cutting speed automatically and steplessly increases or decreases spindle R.P.M. to maintain a predetermined peripheral cutting speed. A must for many precise facing operations. Also used to great advantage on step shaft work.


Totally enclosed, automatically lubricated end gearing and gear box.


Four-way power rapid traverse to the carriage and cross slide cuts tool adjust time 50% on the average. Flame hardened and ground bed ways for both carriage and tailstock.

Built-In Constant Surface Cutting Speed. This feature becomes operative at the flick of a switch. With it, the operator is *always* using the most efficient surface cutting speed. Both finish and accuracy are improved. So is tool life. Constant surface cutting speed is recommended particularly on facing operations. It can also be used advantageously on multiple diameter shaft work.

The importance of using the most efficient surface cutting speed in lathe operations cannot be overemphasized. There has always been recognition of this fact but in actual practice the difficulty or impossibility of securing the proper surface cutting speed over all diameters of a work piece has led to compromises.

Using constant surface cutting speed, all the operator needs do is set the Series EE at the desired surface cutting speed and from that point on the machine takes over, giving him that speed *exactly* without further thought on his part.

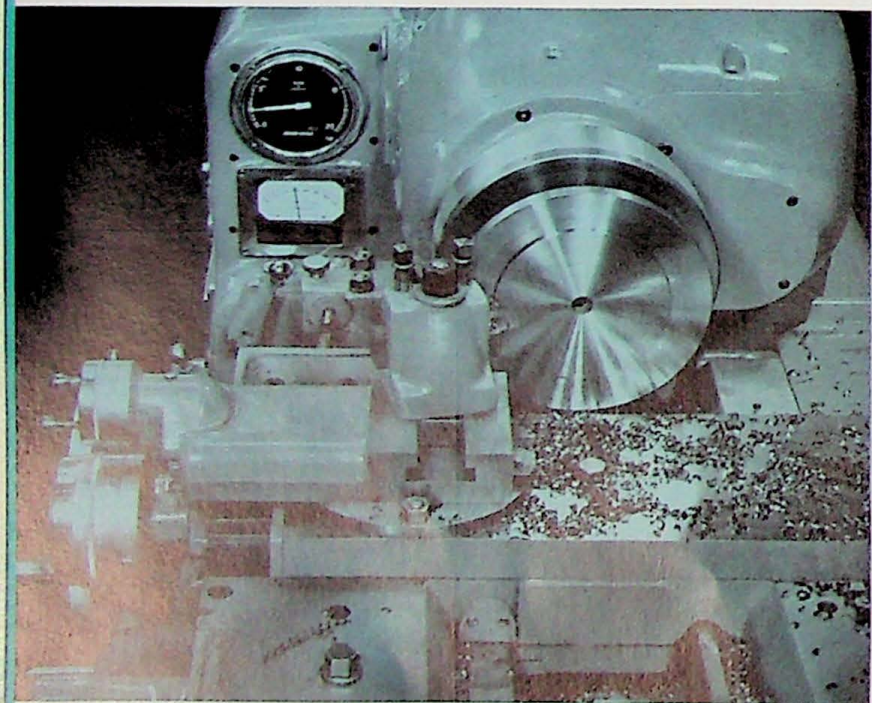

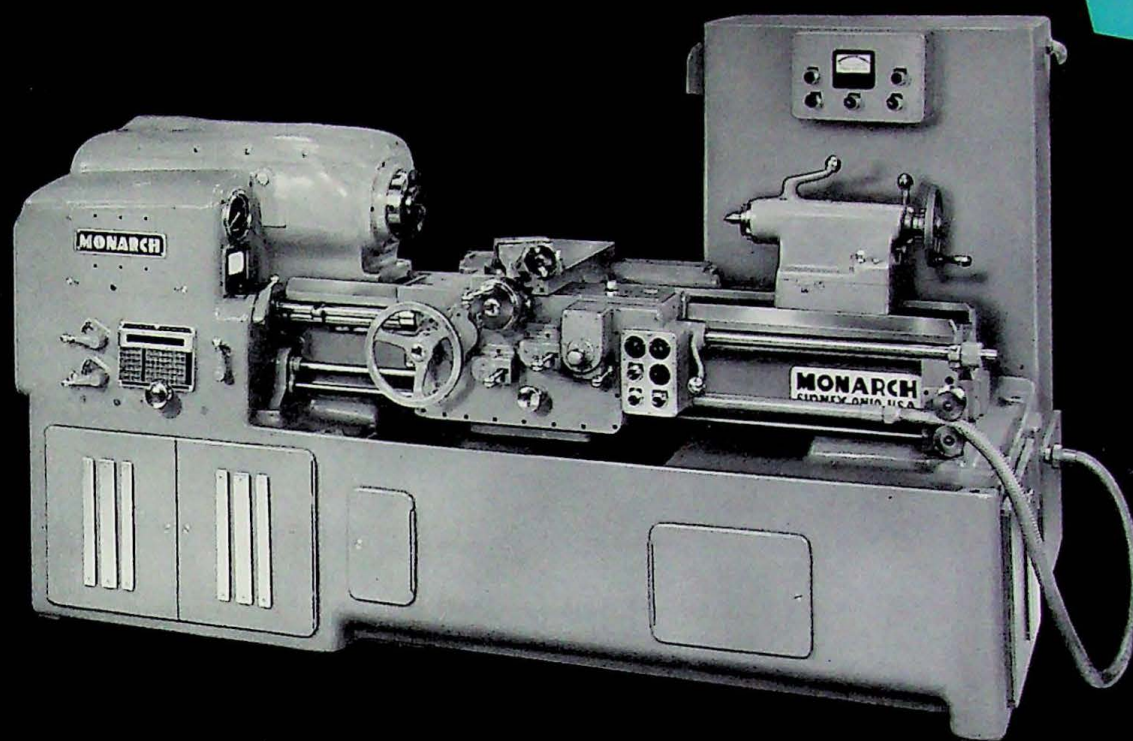


Flexibility Unlimited. Within the range of the machine, it's difficult to find a lathe job which the Series EE cannot handle efficiently. Equipped for all-around dual purpose operation (as illustrated above) this lathe includes built-in constant surface cutting speed, apron controlled leadscrew reverse, gear box with 66 thread and feed changes, four-way power rapid traverse to the carriage and cross slide, screw operated tailstock, steady rest, face plate, dog plate and round tool post. A considerable amount of optional equipment is available.

The machine may also be supplied with a simplified six-feed gear box. Any one of three different feed ranges may be provided including .001" to .036", .0015" to .048" and .002" to .066" per revolution. So equipped, no lead-screw, leadscrew reverse or apron half nuts are furnished. Threading operations, as a consequence, cannot be performed.

SPECIFICATIONS

Swing over bed	15 $\frac{1}{2}$ "
Swing over cross slide	8 $\frac{3}{4}$ "
Length between centers	30" and 54"
Floor space	62" W x 101" L
Hole through spindle	1 $\frac{3}{16}$ "
American standard Camlock spindle nose	6"—D-1
Spindle speed range	25 to 2000 R.P.M.
Range of threads per inch (66)	2 to 120
Range of feeds per revolution (66)	.001" to .066"
Motor size	20 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	10,250 lbs.

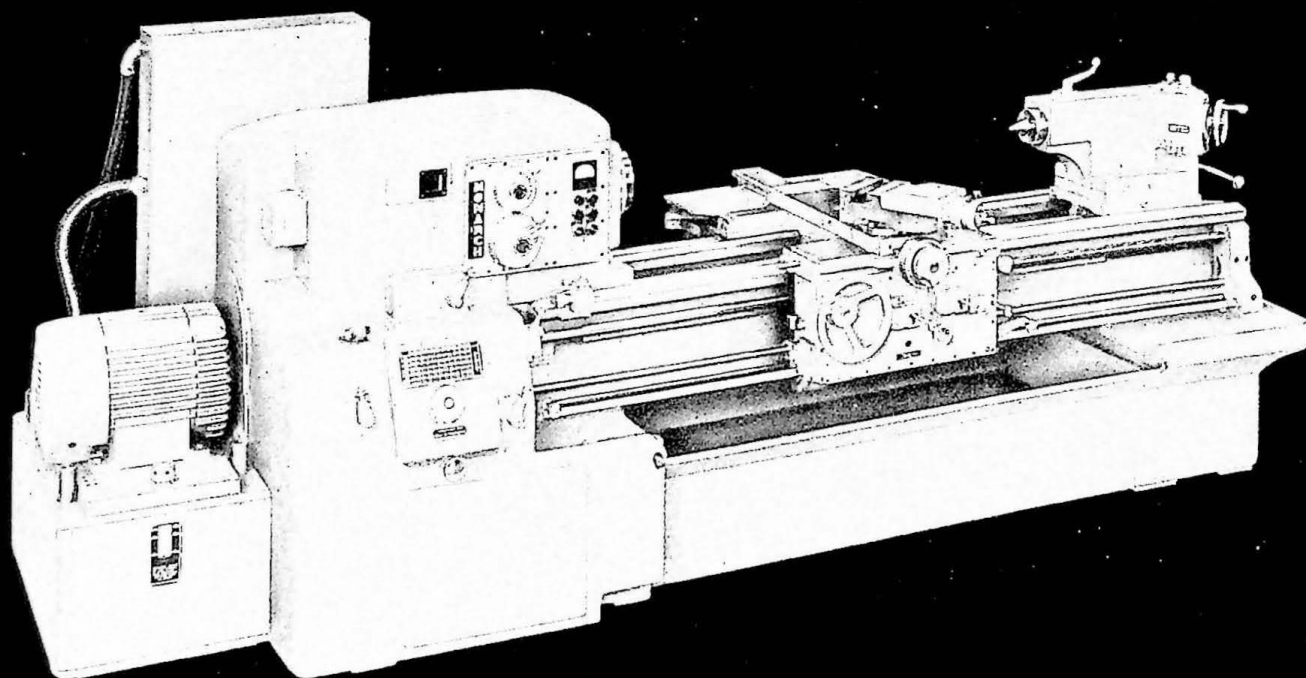


Recommended Use. An entirely new concept of lathe design featuring the Monarch Dyna-Shift drive headstock. Its chief advantages are (1) automatic machine calculation of necessary spindle speed to secure desired surface cutting speed, (2) speed preselection to maintain work surface cutting speed on successive diameters and (3) 36 spindle speeds in such a wide range as to take care of all turning needs. Net result is more work, longer tool life and incredibly easy operation.

Major Features. Headstock provided with two large dials; one for the work diameter setting, the other for the surface speed setting. The machine automatically and instantaneously calculates the spindle speed while movement of a single lever causes the shift to take place hydraulically and begins spindle rotation.

Using preselection feature, operator can set up any number of speeds and preselect the next speed to be used while the machine is in operation. It's so quick and easy for him to do this that he is certain to take advantage of the increased output possible instead of turning successive diameters using one compromise speed as is so commonly the procedure everywhere.

Work start and stop levers have three positions—RUN, BRAKE and JOG. There is finger-touch shifting as these levers do nothing but open valves. Hydraulic power does the work of clutching, braking and jogging.



All spindle drive gears are of the helical type. Spindle has an American standard 6" type D-1 Camlock nose. Spindle and all shafts are hardened, have ground threads and rotate on anti-friction bearings. Center bearing support is provided for spindle and long intermediate shaft.

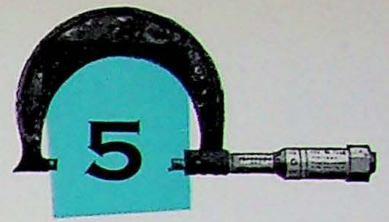

SPECIFICATIONS

	MODEL 1610	MODEL 1610-13	MODEL 1610T	MODEL 1610-13T
Clearance diameter	16"	20"	16"	20"
Swing over cross slide	10"	13"	10"	13"
Length between centers	30", 54", 78", 102", 126" and 150"			
Floor space—base length	53" W x 122" L	53" W x 122" L	53" W x 122" L	53" W x 122" L
Hole through spindle	2 $\frac{1}{16}$ "	2 $\frac{1}{16}$ "	2 $\frac{1}{16}$ "	2 $\frac{1}{16}$ "
American standard Camlock spindle nose	6"—D-1	6"—D-1	6"—D-1	6"—D-1
Number of spindle speeds	36	36	36	36
Spindle speed range	14 to 1750 R.P.M.	14 to 1750 R.P.M.	14 to 1750 R.P.M.	14 to 1750 R.P.M.
Range of threads per inch (66)	2 to 120	2 to 120	2 to 120	2 to 120
Range of feeds per revolution (66)	.0013" to .082"	.0013" to .082"	.0013" to .082"	.0013" to .082"
Motor size	10 H.P.	10 H.P.	10 H.P.	10 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	6110 lbs.	6185 lbs.	6405 lbs.	6480 lbs.

PRESELECTOR DYNA-SHIFT LATHES—SERIES 62

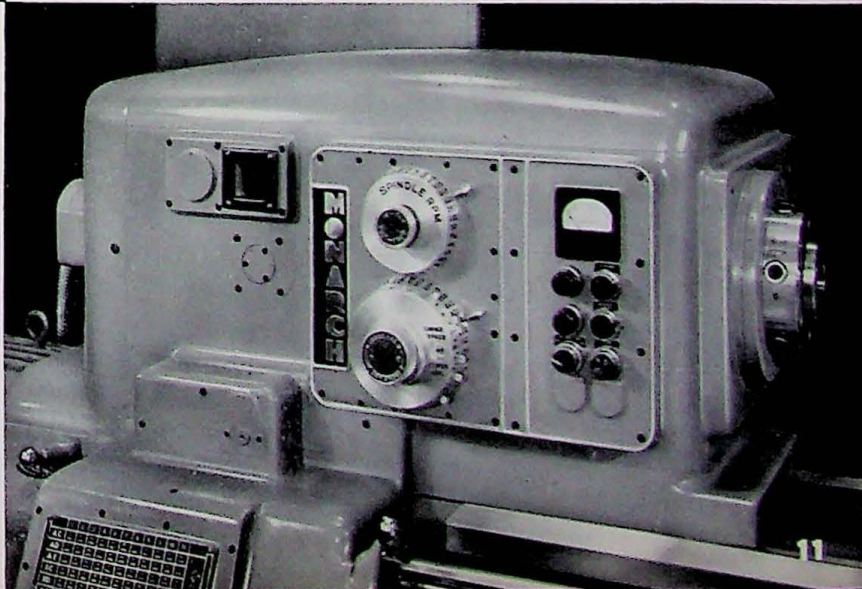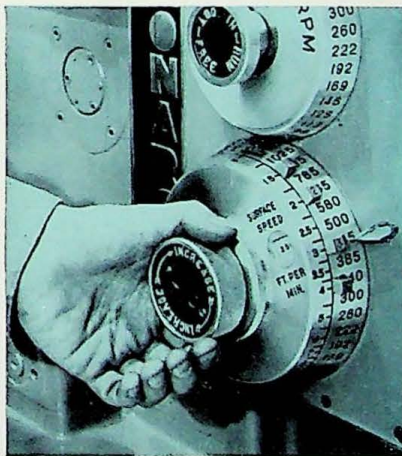


SPECIFICATIONS

	MODEL 2013	MODEL 2013-16	MODEL 2013T	MODEL 2013-16T
Clearance diameter	20"	24"	20"	24"
Swing over cross slide	13"	16"	13"	16"
Length between centers	30", 54", 78", 102", 126", 150", 174" and 198"			
Floor space—base length	55" W x 132" L	55" W x 132" L	55" W x 132" L	55" W x 132" L
Hole through spindle	2 1/8"	2 1/8"	2 1/8"	2 1/8"
American standard Camlock spindle nose	6"—D-1	6"—D-1	6"—D-1	6"—D-1
Number of spindle speeds	36	36	36	36
Spindle speed range	14 to 1750 R.P.M.	14 to 1750 R.P.M.	14 to 1750 R.P.M.	14 to 1750 R.P.M.
Range of threads per inch (66)	2 to 120	2 to 120	2 to 120	2 to 120
Range of feeds per revolution (66)	.001" to .068"	.001" to .068"	.001" to .068"	.001" to .068"
Motor size	20 H.P.	20 H.P.	20 H.P.	20 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	8810 lbs.	9010 lbs.	9220 lbs.	9420 lbs.

SPECIFICATIONS

	MODEL 2516	MODEL 2516-19	MODEL 2516T	MODEL 2516-19T
Clearance diameter	25"	28"	25"	28"
Swing over cross slide	16"	19"	16"	19"
Length between centers	48", 72", 96", 120", 144", 168", 192", and 216"			
Floor space—base length	56" W x 156" L	56" W x 156" L	56" W x 156" L	56" W x 156" L
Hole through spindle	2 1/8"	2 1/8"	2 1/8"	2 1/8"
American standard Camlock spindle nose	6"—D-1	6"—D-1	6"—D-1	6"—D-1
Number of spindle speeds	36	36	36	36
Spindle speed range	14 to 1750 R.P.M.	14 to 1750 R.P.M.	14 to 1750 R.P.M.	14 to 1750 R.P.M.
Range of threads per inch (66)	2 to 120	2 to 120	2 to 120	2 to 120
Range of feeds per revolution (66)	.001" to .068"	.001" to .068"	.001" to .068"	.001" to .068"
Motor size	20 H.P.	20 H.P.	20 H.P.	20 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	9420 lbs.	9620 lbs.	9970 lbs.	10170 lbs.

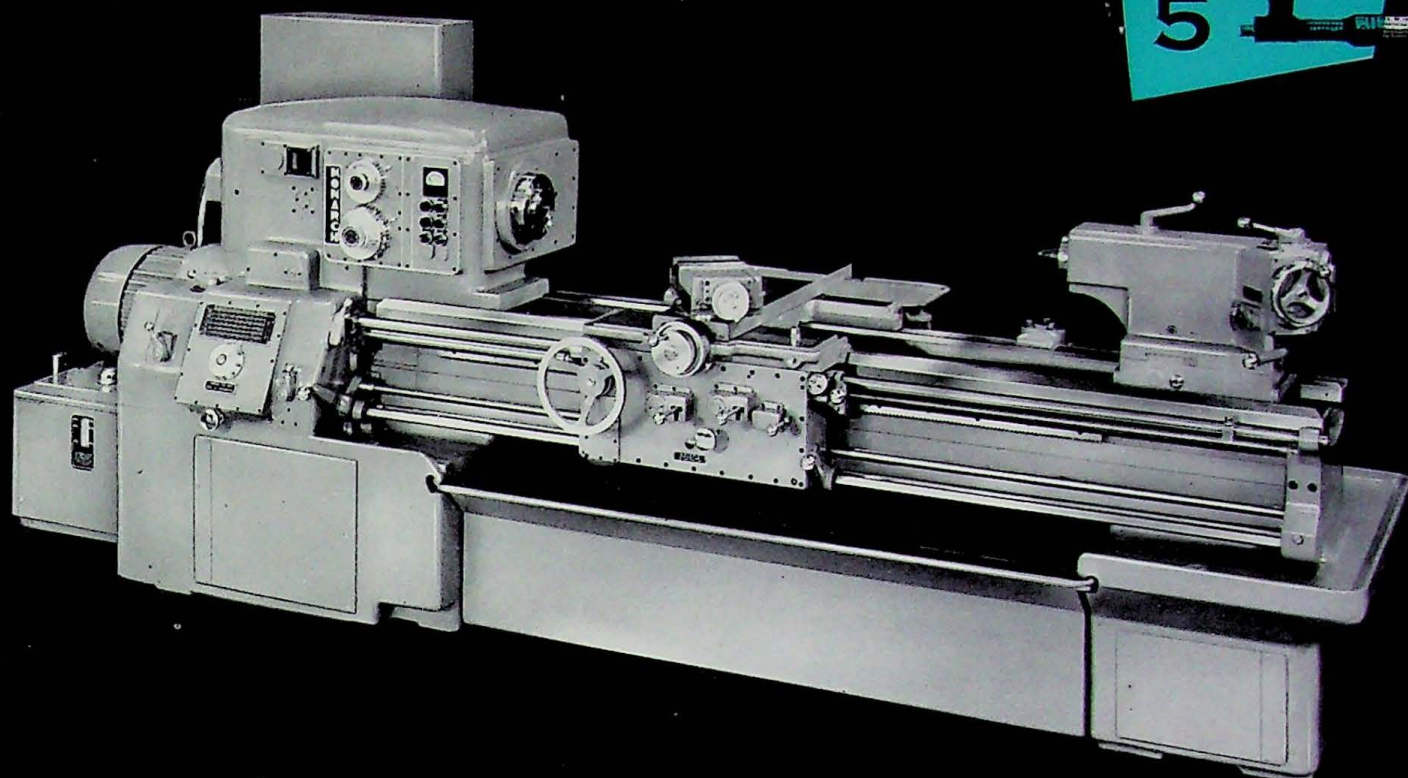

Lubrication of all headstock gears and bearings is by means of a high pressure mist spray system.

Tailstock is the quick clamping, anti-friction type. Hardened and ground spindle is so designed that it may be used for drilling and reaming just as proficiently as a dead center spindle.

There are two tailstock spindle speed ranges—a fast one for quick positioning, a slow one for drilling and locating. Lubrication system in tailstock base feeds oil under pressure to all points where it is needed.

End gearing and gear box are totally enclosed and automatically lubricated.

Series 62 machines are supplied with either one of two leadscrew reverse methods. This may be accomplished by a lever at the front of the headstock or may be apron controlled, the latter method being employed generally on machines used in the toolroom.

Filtered and metered automatic force feed lubrication, under all operating conditions, supplied to apron parts, carriage bearing on bed ways and compound rest bottom slide bearing on carriage.

On longer bed machines the leadscrew and all rods are continuously supported by traveling carriers which are automatically picked up or dropped off by movement of apron.

Power rapid traverse to both the carriage and the cross slide is apron controlled through the regular longitudinal and cross feed friction levers. This feature alone cuts tool adjust time 50% on the average.

Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

	13"	16"	20"
Swing over bed	15½"	18½"	22½"
Swing over cross slide	9¾"	10½"	13¾"
Length between centers	30" to 126"	30" to 174"	48" to 216"
Floor space—base length	41" W x 98" L	44" W x 98" L	44" W x 122" L
Hole through spindle	1⅝"	1⅝"	1⅝"
American standard Camlock spindle nose	6"—D-1	6"—D-1	6"—D-1
Number of spindle speeds	16	16	16
Spindle speed range (standard)	19 to 800 R.P.M.	17 to 700 R.P.M.	17 to 700 R.P.M.
Range of threads per inch (66)	2 to 120	2 to 120	2 to 120
Range of feeds per revolution (66)	.0017" to .103"	.0014" to .084"	.0014" to .084"
Motor size	5-7½ H.P.	7½-15 H.P.	10-20 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	4850 lbs.	7550 lbs.	8160 lbs.

SPECIFICATIONS ENGINE LATHES

Recommended Use. A complete range of lathes in either of two types—engine lathes for small or medium lot manufacturing operations and toolmaker's lathes with that extra versatility so desirable in toolroom work. Both types also available with plus-swing.

Major Features. Headstock is helical geared with speed changes made by sliding heavy sided jaw clutches. This method of manual change is quick and positive and years of satisfactory performance have proved the design superior when speed change is secured manually.

Headstock spindle and long intermediate shaft have center bearing support. Lubrication of the headstock is combined pump and splash.

Quick clamping type tailstock furnished on all 13" machines and on 16" and 20" Toolmaker's Lathes. On all 16" and 20" machines, plunger pin in right front carriage wing is engaged in tailstock base to reposition tailstock on bed by means of apron handwheel.

Totally enclosed, automatically lubricated end gearing and gear box.

Leadscrew reverse operated by lever at front of headstock on engine lathes. Toolmaker's lathes have leadscrew reverse operated by lever at right hand side of apron, in which case stops on reverse rod provide close control in both directions of carriage travel, either when threading or feeding.



Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

Strongly recommended, but supplied only on order, is power rapid traverse to both carriage and cross slide. These movements, which are apron controlled through the regular longitudinal and cross feed friction levers, cut tool adjust time 50% on the average.

	13"	16"	20"
Swing over bed	15½"	18½"	22½"
Swing over cross slide	9¾"	10½"	13¾"
Length between centers	30" to 126"	30" to 174"	48" to 216"
Floor space—base length	41" W x 98" L	44" W x 98" L	44" W x 122" L
Hole through spindle	1⅝"	1⅝"	1⅝"
American standard Camlock spindle nose	6"—D-1	6"—D-1	6"—D-1
Number of spindle speeds	16	16	16
Spindle speed range (standard)	19 to 800 R.P.M.	17 to 700 R.P.M.	17 to 700 R.P.M.
Range of threads per inch (66)	2 to 120	2 to 120	2 to 120
Range of feeds per revolution (66)	.0017" to .103"	.0014" to .084"	.0014" to .084"
Motor size	5-7½ H.P.	7½-15 H.P.	10-20 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	5145 lbs.	7960 lbs.	8710 lbs.

SPECIFICATIONS TOOLMAKER'S LATHES

ENGINE AND TOOLMAKER'S LATHES
—SERIES 61

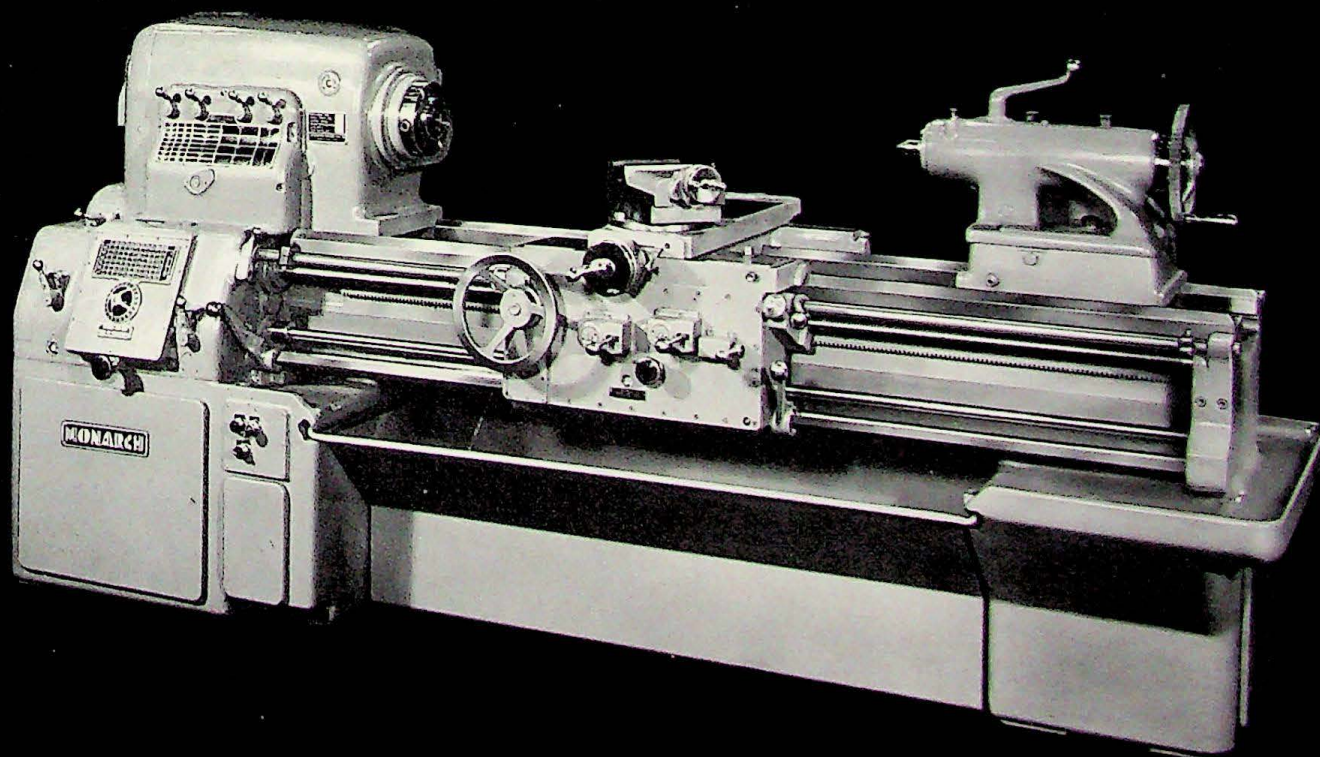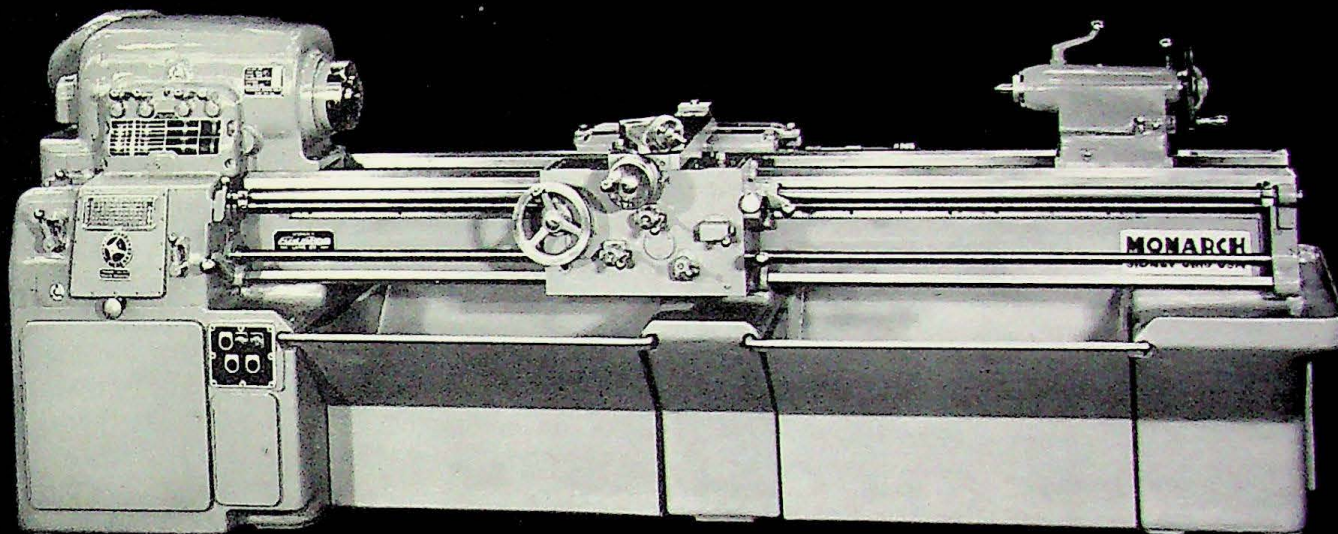

Recommended Use. Here is a completely different approach to the problem of heavy duty metal turning. The Series 80, with its Dyna-Shift drive headstock, provides (1) automatic machine calculation of necessary spindle speed to secure desired surface cutting speed and (2) 36 spindle speeds in a ratio of 125 to 1 which range is so wide as to take care of all turning needs. These features (plus many others, including a unique design of power rapid traverse) account for a rate of metal removal not possible heretofore.


Major Features. Headstock provided with two large dials; one for the work diameter setting, the other for the surface cutting speed setting. The machine automatically calculates the required spindle speed and hydraulically shifts to that speed. A safety interlocking valve provides free spindle rotation and a run setting so the spindle can be started, stopped or jogged by the work start and stop levers.

These levers have three positions—RUN, BRAKE and JOG. There is finger-touch shifting as these levers do nothing but operate valves. Hydraulic power does the work of clutching, braking and jogging.

Tailstock spindle, of the anti-friction bearing type, has two ratios of lateral movement—a traverse ratio with generous power and speed for fast positioning; a feeding ratio with plenty of power for drilling operations plus sensitive control for accurate positioning.

Hydraulically powered, variable speed, rapid traverse moves the carriage right or left and the cross slide in or out. Controls are arranged so that any one of these movements may be made to take place separately or any combination of a carriage movement and a cross slide movement may take place simultaneously. Final manual positioning is practically eliminated by this feature.

Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

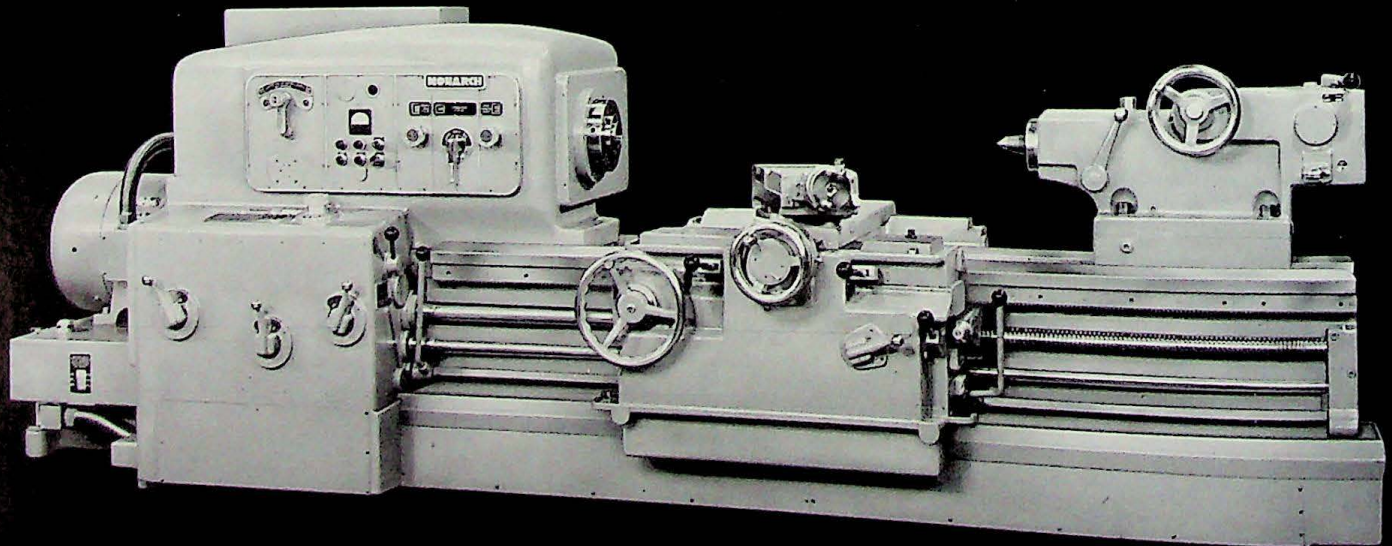




DYNA-SHIFT HEAVY DUTY LATHES—SERIES 80


SPECIFICATIONS

	MODEL 2516	MODEL 2516-20
Clearance diameter	25"	30"
Swing over cross slide	16"	20"
Length between centers	48" to 240"	48" to 240"
Floor space—base length	72" W x 179" L	72" W x 179" L
Hole through spindle	3 $\frac{1}{16}$ "	3 $\frac{1}{16}$ "
American standard Camlock spindle nose	8"—D-1	8"—D-1
Number of spindle speeds	36	36
Spindle speed range	10 to 1250 R.P.M.	10 to 1250 R.P.M.
Range of threads per inch (48)	$\frac{1}{2}$ to 28	$\frac{1}{2}$ to 28
Range of feeds per revolution (48)	.003" to .1683"	.003" to .1683"
Motor drive capacity equivalent to	45 H.P.	45 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	18,500 lbs.	19,500 lbs.

SPECIFICATIONS

	MODEL 3220	MODEL 3220-24	MODEL 3220-28
Clearance diameter	32"	36"	40"
Swing over cross slide	20"	24"	28"
Length between centers	48" to 240"	48" to 240"	48" to 240"
Floor space — base length	80" W x 190" L	80" W x 190" L	80" W x 190" L
Hole through spindle	3 $\frac{3}{16}$ "	3 $\frac{3}{16}$ "	3 $\frac{3}{16}$ "
American standard Camlock spindle nose	11"—D-1	11"—D-1	11"—D-1
Number of spindle speeds	36	36	36
Spindle speed range	8 to 1000 R.P.M.	8 to 1000 R.P.M.	8 to 1000 R.P.M.
Range of threads per inch (48)	$\frac{1}{2}$ to 28	$\frac{1}{2}$ to 28	$\frac{1}{2}$ to 28
Range of feeds per revolution (48)	.003" to .1683"	.003" to .1683"	.003" to .1683"
Motor drive capacity equivalent to	60 H.P.	60 H.P.	60 H.P.
Net weight, with average accessory equipment, including all electrical equipment — base length	21,000 lbs.	22,000 lbs.	23,000 lbs.

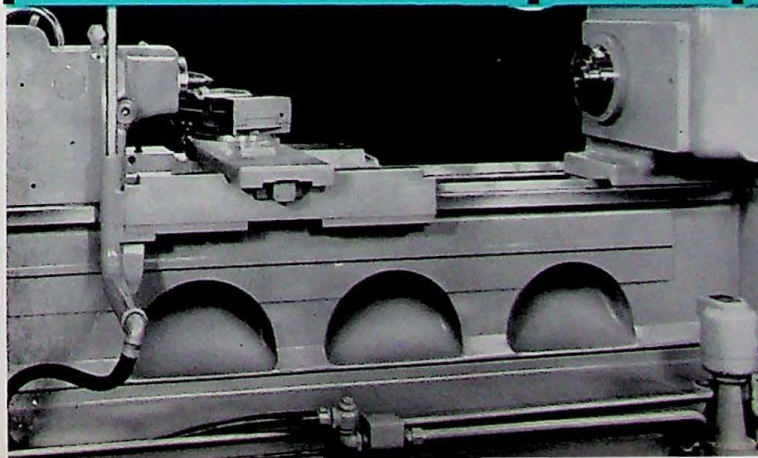

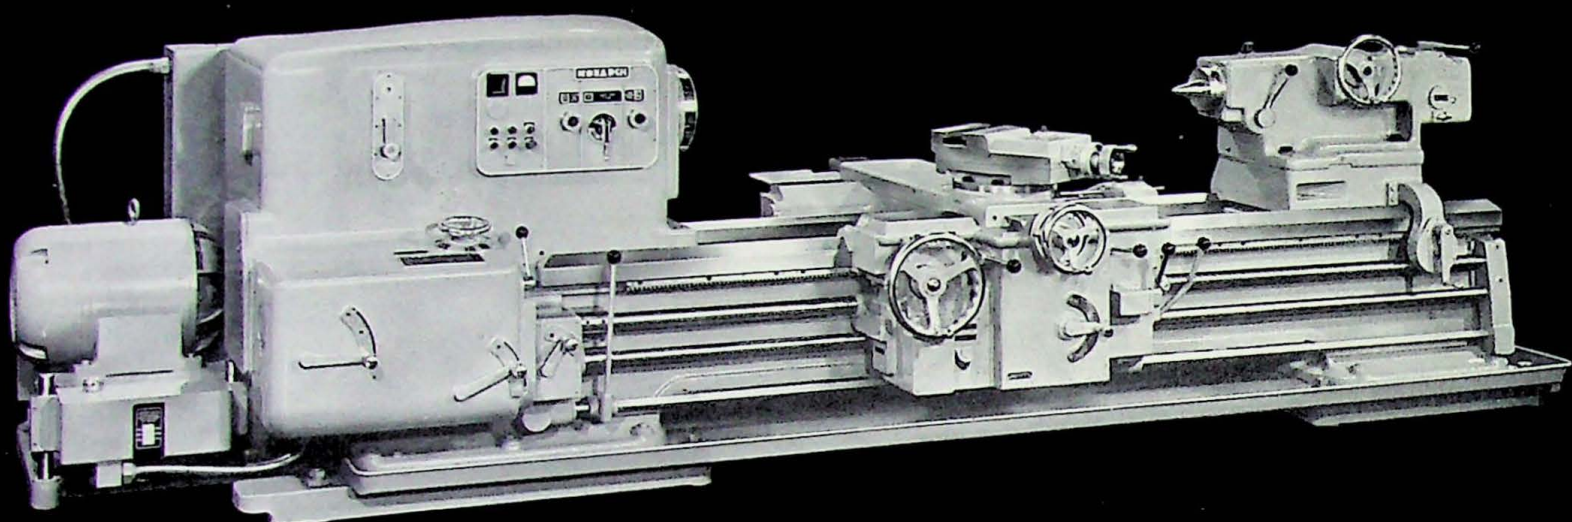

DYNA-SHIFT HEAVY DUTY LATHES—SERIES 90

Recommended Use. Like the Series 80 Dyna-Shift Lathe, previously described, this machine also offers a completely different approach to the problem of heavy duty metal turning. The Series 90, with its Dyna-Shift drive headstock, provides (1) automatic machine calculation of necessary spindle speed to secure desired surface cutting speed and (2) 36 spindle speeds in a ratio of 125 to 1 which range is so wide as to take care of all turning needs. These features (plus many others) allow carbide tooling to be used to its fullest advantage and account for metal removal rates in excess of 100 cubic inches per minute.





Major Features. Headstock provided with two large dials; one for the work diameter setting, the other for the surface cutting speed setting. The machine automatically calculates the required spindle speed and hydraulically shifts to that speed. A safety interlocking valve provides free spindle rotation and a run setting so the spindle can be started, stopped or jogged by the work start and stop levers.

These levers have three positions—RUN, BRAKE and JOG. There is finger-touch shifting as these levers do nothing but operate valves. Hydraulic power does the work of clutching, braking and jogging.

Tailstock spindle, of the anti-friction bearing type, has two ratios of lateral movement—a traverse ratio with generous power and speed for fast positioning; a feeding ratio with plenty of power for drilling operations plus sensitive control for accurate positioning.



Individual motor driven carriage power rapid traverse gives traverse movement in both directions of carriage travel. This unit is also capable of inching the carriage almost exactly to the desired point on the bed.

Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

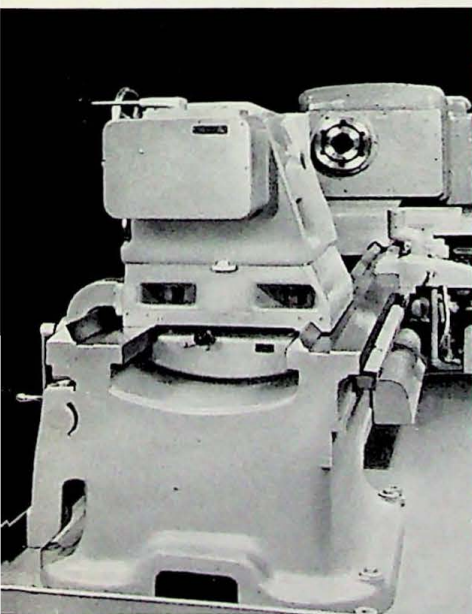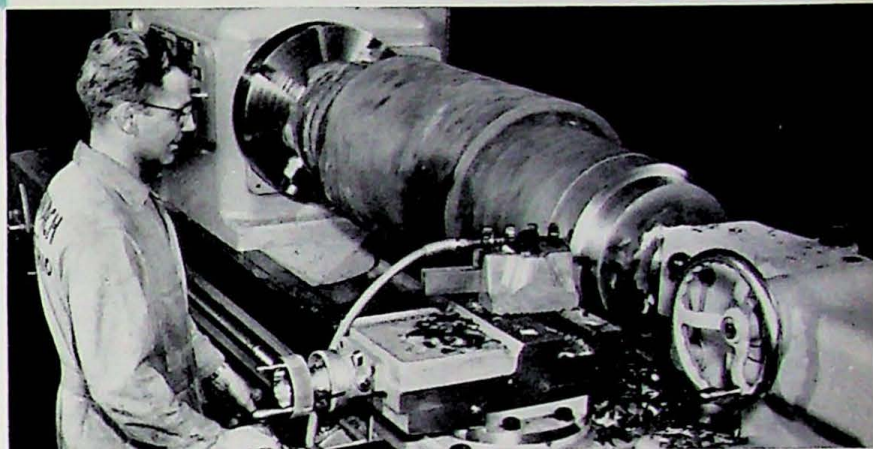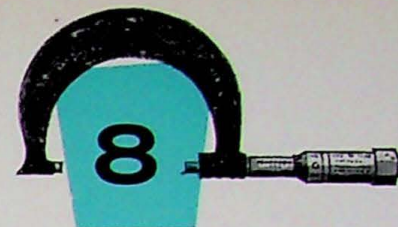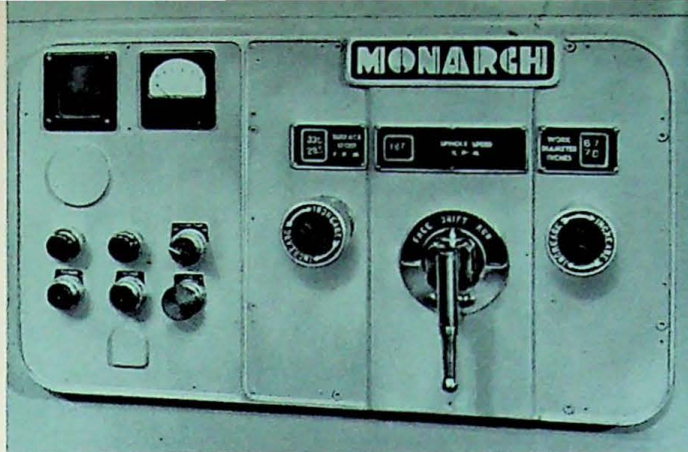

	MODEL 4025	MODEL 4025-31	MODEL 4025-36
Clearance diameter	40"	44"	48"
Swing over cross slide	25"	31"	36"
Length between centers	60" to 324"	60" to 324"	60" to 324"
Floor space—base length	88" W x 202" L	88" W x 202" L	88" W x 202" L
Hole through spindle	4 $\frac{1}{16}$ "	4 $\frac{1}{16}$ "	4 $\frac{1}{16}$ "
American standard Camlock spindle nose	11"—D-1	11"—D-1	11"—D-1
Number of spindle speeds	36	36	36
Spindle speed range	6 to 750 R.P.M.	6 to 750 R.P.M.	6 to 750 R.P.M.
Range of threads per inch (48)	$\frac{1}{2}$ to 28	$\frac{1}{2}$ to 28	$\frac{1}{2}$ to 28
Range of feeds per revolution (48)	.0035" to .196"	.0035" to .196"	.0035" to .196"
Motor drive capacity equivalent to	60 H.P.	60 H.P.	60 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	26,000 lbs.	27,500 lbs.	29,000 lbs.

SPECIFICATIONS

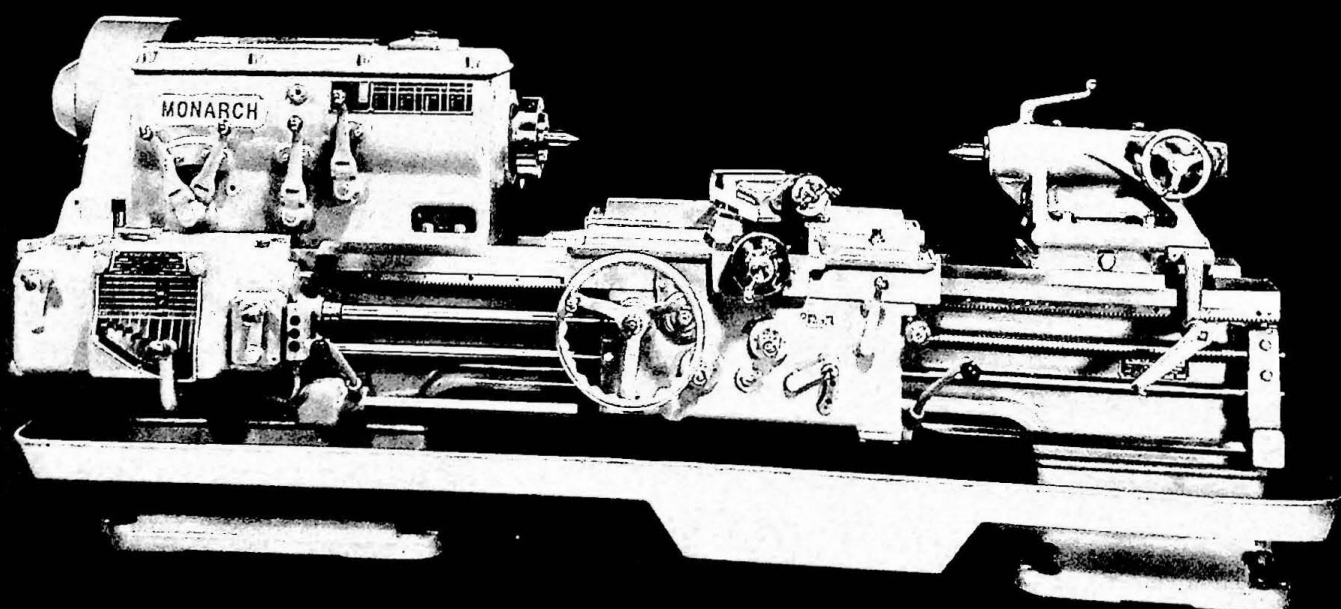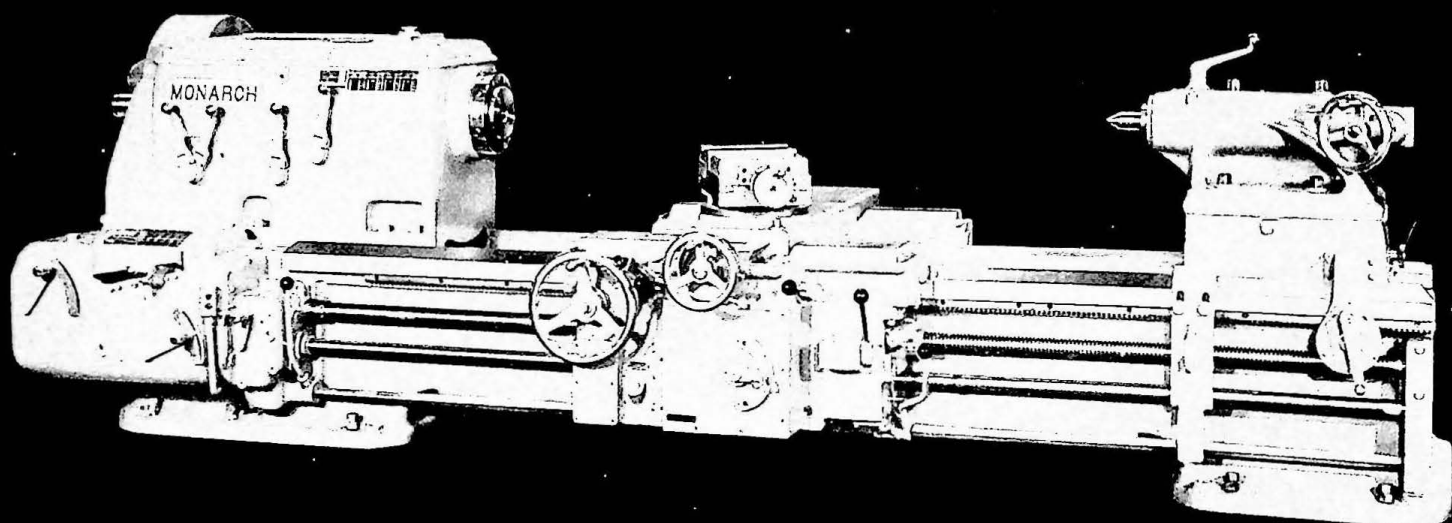

HEAVY DUTY LATHES—

MODELS M, N AND NN



	MODEL M-1	MODEL N-1	MODEL NN-1
Swing over bed	22½"	27½"	40"
Swing over cross slide	13"	14"	25"
Length between centers	48" to 288"	48" to 288"	60" to 324"
Floor space—base length	77" W x 148" L	82" W x 162" L	90" W x 182" L
Hole through spindle	2⅜"	2⅜"	2⅜"
American standard Camlock spindle nose	8"—D-1	8"—D-1	11"—D-1
Number of spindle speeds	16	16	16
Spindle speed range (standard)	11 to 500 R.P.M.	8 to 405 R.P.M.	8 to 405 R.P.M.
Range of threads per inch (48)	¾ to 46	¾ to 46	½ to 28
Range of feeds per revolution (48)	.0038" to .240"	.0038" to .240"	.006" to .363"
Motor size	15-30 H.P.	20-40 H.P.	20-40 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	10,150 lbs.	14,750 lbs.	24,250 lbs.

Recommended Use. All these lathes are built to "take it" under the most grueling operating conditions. This requires power and rigidity which they have in generous measure. They are also designed to meet today's exacting demands for high finish, close accuracy and convenience of operation.

The specifications above cover only the basic machines in each series of models. Also available are the following: Model M-2 with 24½" clearance diameter, 15" swing over cross slide; Model M-3 with 27½" clearance diameter, 18" swing over cross slide; Model M-4 with 30½" clearance diameter, 21" swing over cross slide; Model N-2 with 30½" clearance diameter, 18" swing over cross slide; Model N-3 with 33½" clearance diameter, 21" swing over cross slide; Model N-4 with 36½" clearance diameter, 24" swing over cross slide; Model NN-2 with 44" clearance diameter, 31½" swing over cross slide and Model NN-3 with 48" clearance diameter, 36½" swing over cross slide.

Major Features. Headstock is helical geared with speed changes made by sliding heavy sided jaw clutches. This method of manual change is quick and positive and years of satisfactory performance have proved the design superior when speed change is secured manually.

Headstock spindle and all shafts are hardened, have ground threads and rotate on anti-friction bearings. Spindle and long intermediate shaft have center bearing support. All headstock gears hardened and either ground or shaved. Lubrication of the headstock is combined pump and splash.

Tailstock of the angular type has handwheel to front.

Apron has fast, fingertip controls. Filtered and metered automatic force feed lubrication to all apron parts, carriage bearing on bed ways and bottom slide bearing on carriage.

Individual motor driven carriage power rapid traverse, providing 185" per minute movement in each direction of travel, regular equipment on Model N and Model NN machines. Supplied optionally on Model M Lathes.



Flame hardened and ground ways for both carriage and tailstock. Bed all in one piece—no inserts.

SPECIFICATIONS


MODEL 15

MODEL 20

Swing over bed	15"	15"
Swing over front slide	8"	8"
Swing over rear slide	7½"	7½"
Length between centers	18", 30", 42"	18", 30", 42"
Floor space—base length	44" W x 81" L	72" W x 81" L
Hole through spindle	2⅜"	2⅜"
Spindle speed ranges	87 to 1000 R.P.M. 177 to 2000 R.P.M. 260 to 3000 R.P.M.	155 to 900 R.P.M. 320 to 1850 R.P.M. 470 to 2700 R.P.M.
Front gear box feed range	1" to 20" per min.	1" to 20" per min.
Rear carriage feed range	¼" to 9" per min.	¼" to 9" per min.
Maximum rear carriage tool slide travel	3½"	3½"
Work drive motor size	up to 15 H.P.	up to 20 H.P.
Net weight, with average accessory equipment, including all electrical equipment—base length	8100 lbs.	9300 lbs.

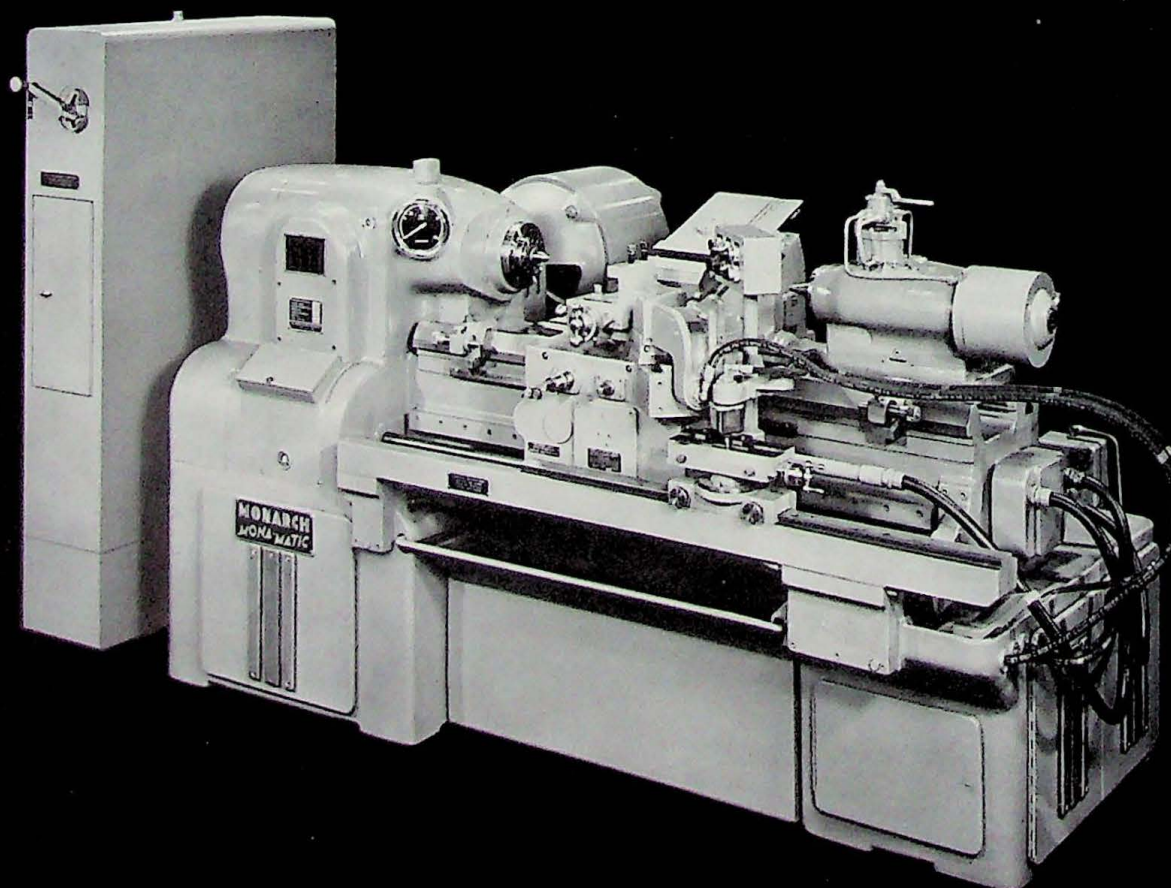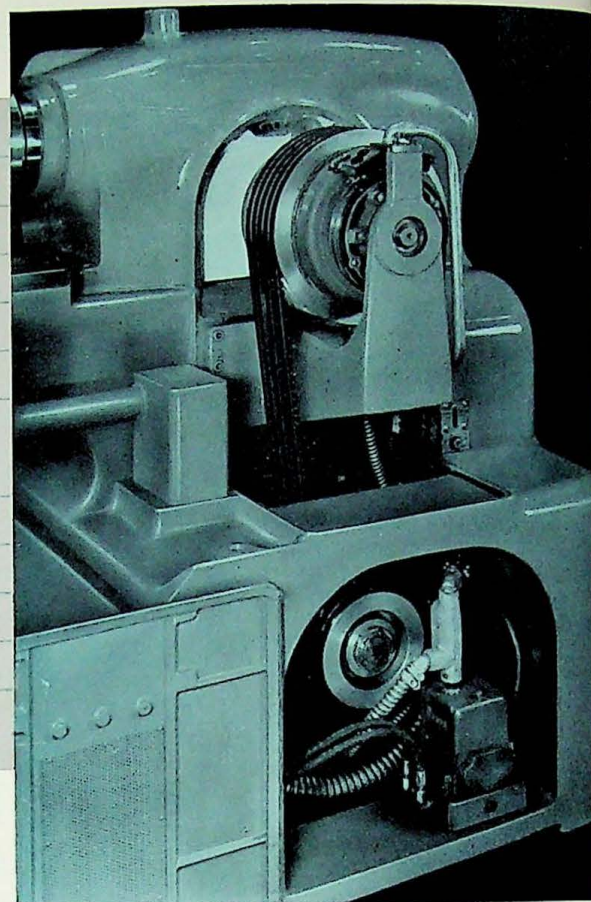

MONA-MATICS—MODELS 15 AND 20

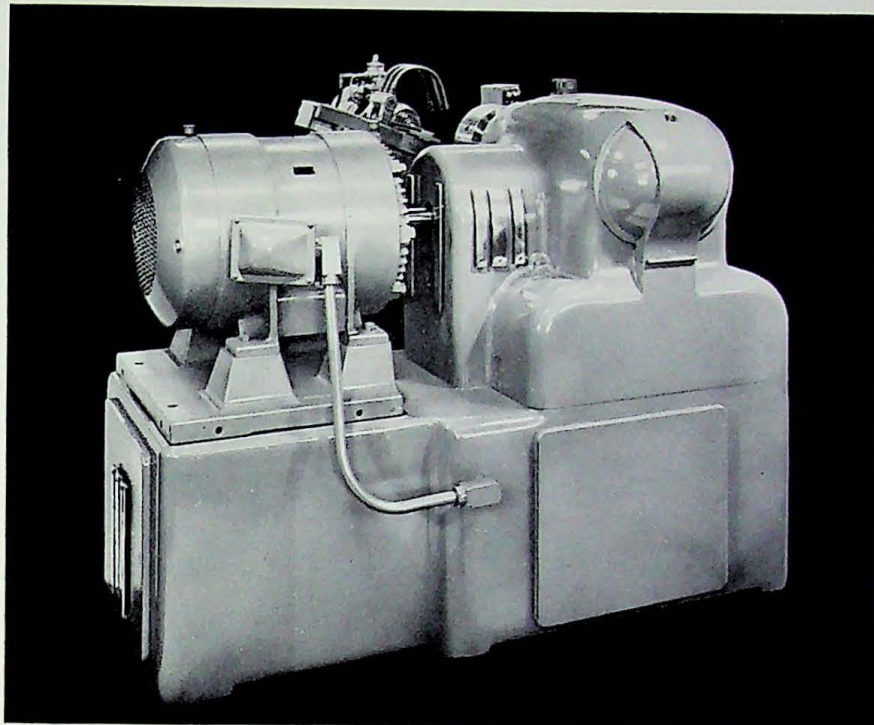

Recommended Use. A fast flexible, "Air-Gage Tracer" controlled, automatic cycle lathe with numerous cycle variations for maximum productivity on both first and second operation work. The advantages of increased output, lower tooling costs and greater accuracy inherent in this machine may be applied to both small and large lot production because of the short set-up time which seldom exceeds 20 to 25 minutes.

Major Features. The single "Air-Gage Tracer" controlled cutting tool on the front carriage turns multiple diameters, tapers, faces, radii and chamfers in one continuous cut. Simultaneously, tools on the rear slide may be used to perform necking, grooving and grinding relief cuts.


Turning cycle is completely automatic. Rear carriage cycle may be set to take place at any time during operation of the front carriage cycle.

Work drive motor on Model 15 (illustrated top of opposite page) mounted in cabinet base. On Model 20 (illustrated above), this motor mounted on a sub-base which is integral with the cabinet base immediately to the rear of the headstock. Both drives are through a magnet type clutch and brake.

Power for infinitely variable carriage feed and for rapid traverse return supplied by electronically controlled motor housed in gear box compartment.

Rear carriage and slide is a completely independent unit driven by its own feed and traverse motors. Tool slide is set at angle of approximately 20° toward center.

All bed ways flame hardened and precision ground. Bed all in one piece—no inserts.

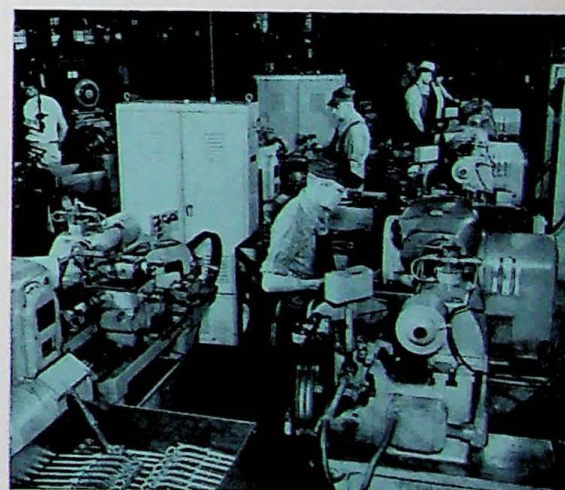

THE MONA-MATIC—MODEL 21

Recommended Use. A high speed, automatic cycle, "Air-Gage Tracer" controlled lathe for the production turning of a vast variety of first and second operation work. The extensive cycling possibilities of the machine plus the ease with which cycles may be varied give it a degree of versatility not common to high production equipment. And that in turn makes this new lathe equally suitable for both large and small lot output.


Major Features. The single "Air-Gage Tracer" controlled cutting tool on the front carriage turns multiple diameters, tapers, faces, radii and chamfers in one continuous cut. Simultaneously, tools on the rear slide may be used to perform necking, grooving and grinding relief cuts.

Turning cycle is completely automatic. The multi-cycle programmer makes it possible to secure cycle variations with unbelievable speed and without any circuitry changes.



The Model 21 is offered as a four-cut, three-cut, two-cut or one-cut cycle machine. Multiple cuts take place all as a part of the automatic cycle, imposing no reasonable limitation on the amount of stock this lathe is capable of removing.



Weight, horsepower, speeds and feeds have all been combined to provide the most effective metal removing turning machine on the market today. An optional feature of great potential value to most users is inbuilt constant surface cutting speed. Automation may also be provided when the nature of the production problem permits.

SPECIFICATIONS

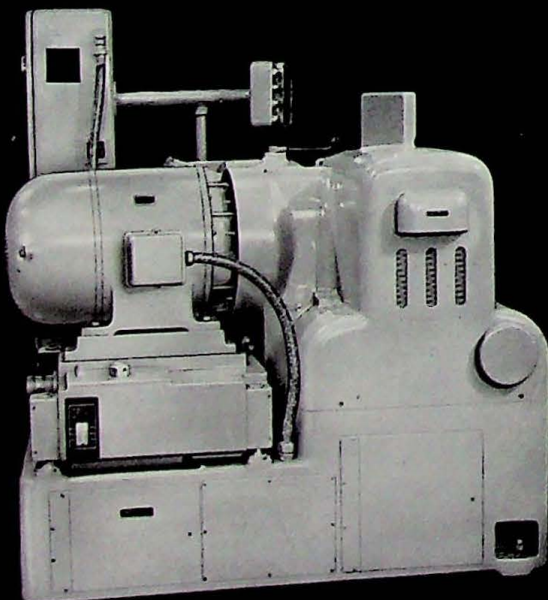

Swing over bed	20"
Swing over front slide	9"
Swing over rear slide	9"
Length between centers	18", 30", 42", 54"
Floor space—base length	78" W x 116" L
Hole through spindle	2 $\frac{3}{16}$ "
Spindle speed ranges	160 to 920 R.P.M. 328 to 1880 R.P.M. 480 to 2760 R.P.M.
Front gear box feed range	2 $\frac{1}{2}$ " to 30" per minute
Rear carriage feed range	$\frac{1}{2}$ " to 15" per minute
Maximum rear carriage tool slide travel	4"
Work drive motor capacity equivalent to	30 H.P.
Net weight, with average tooling, including all electrical equipment—base length	12,400 lbs.

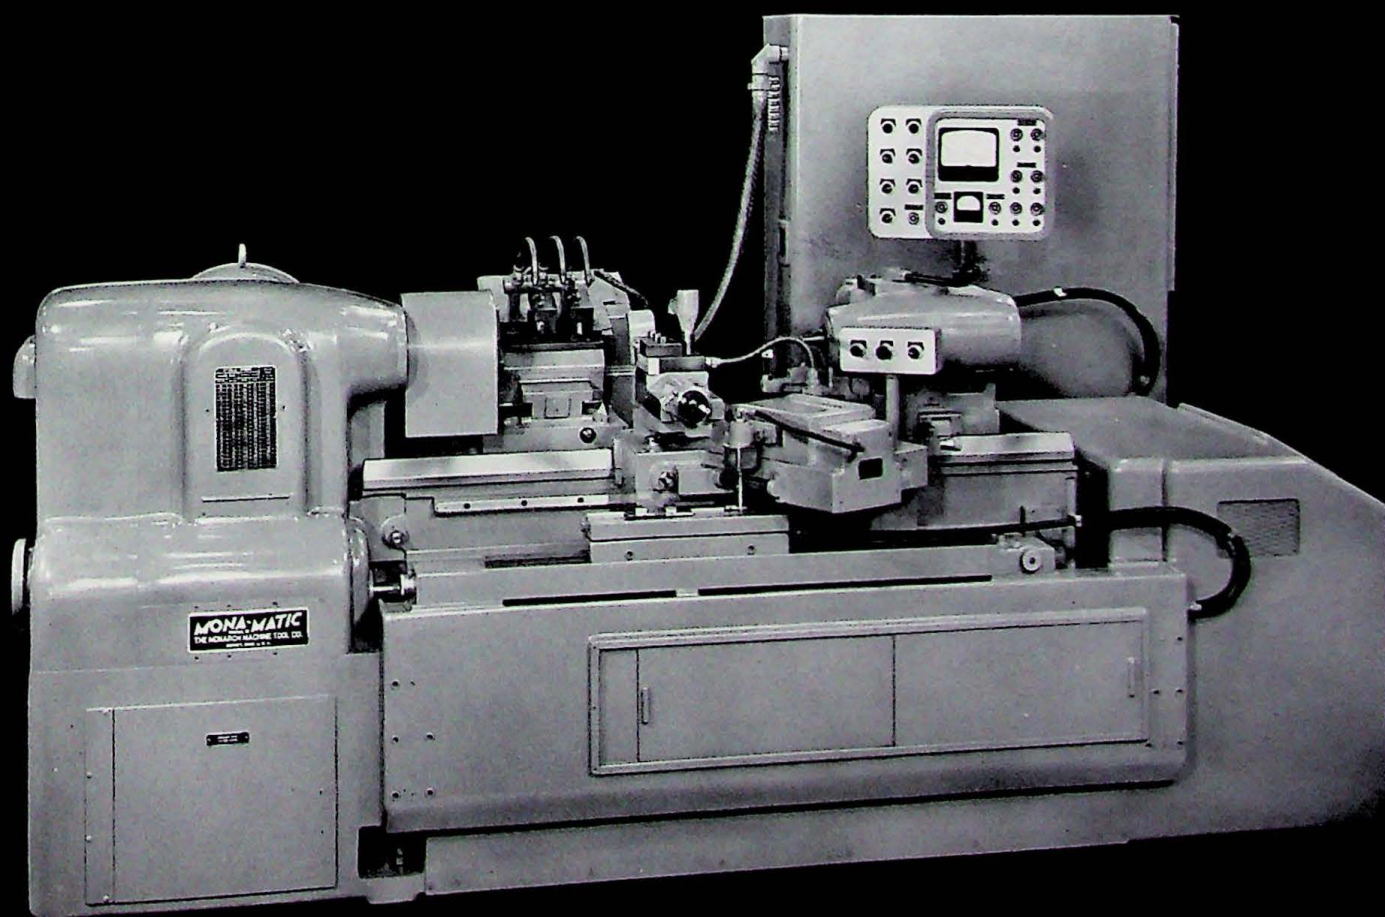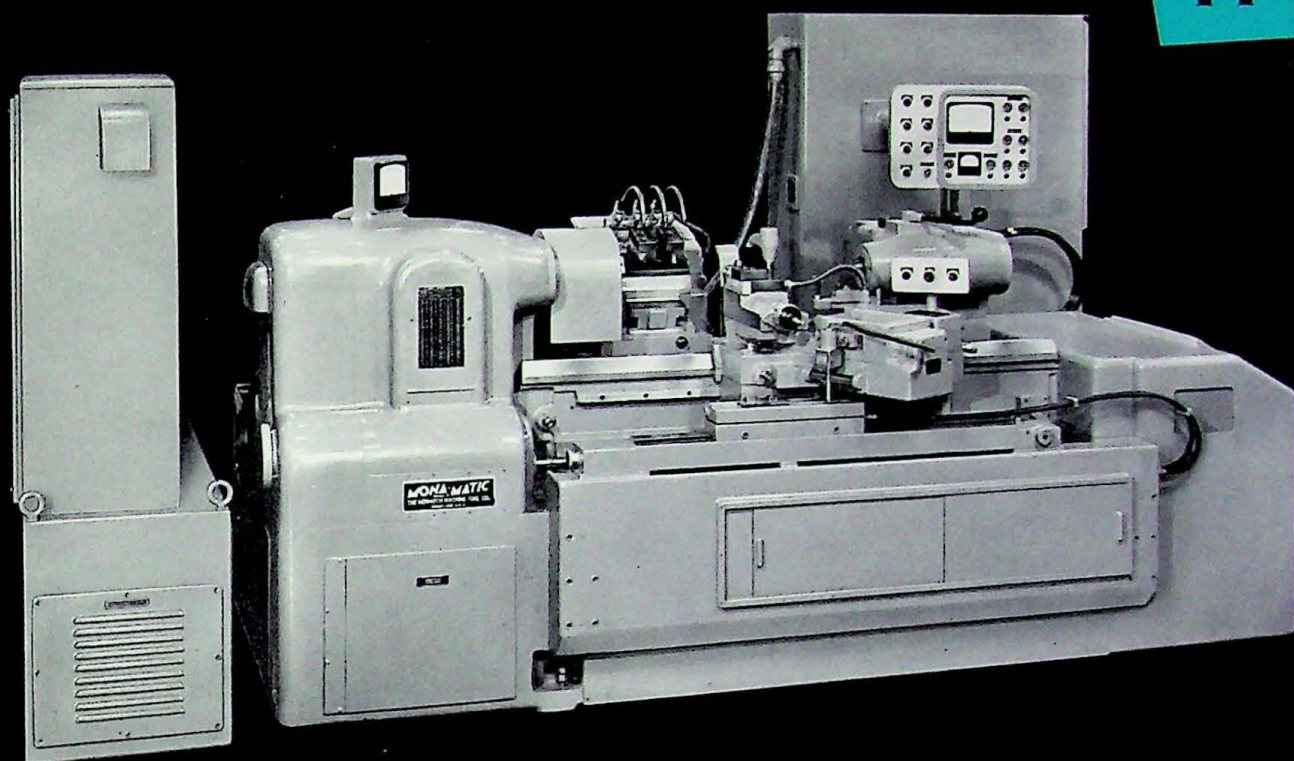

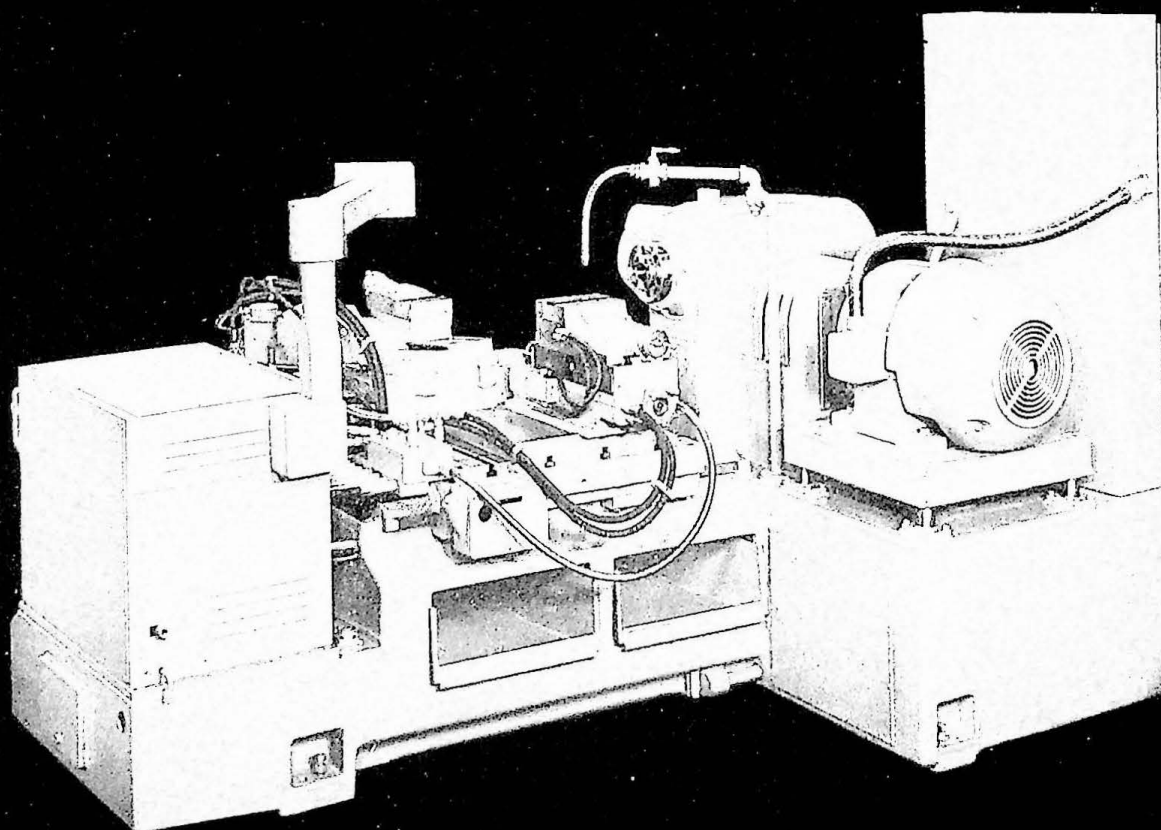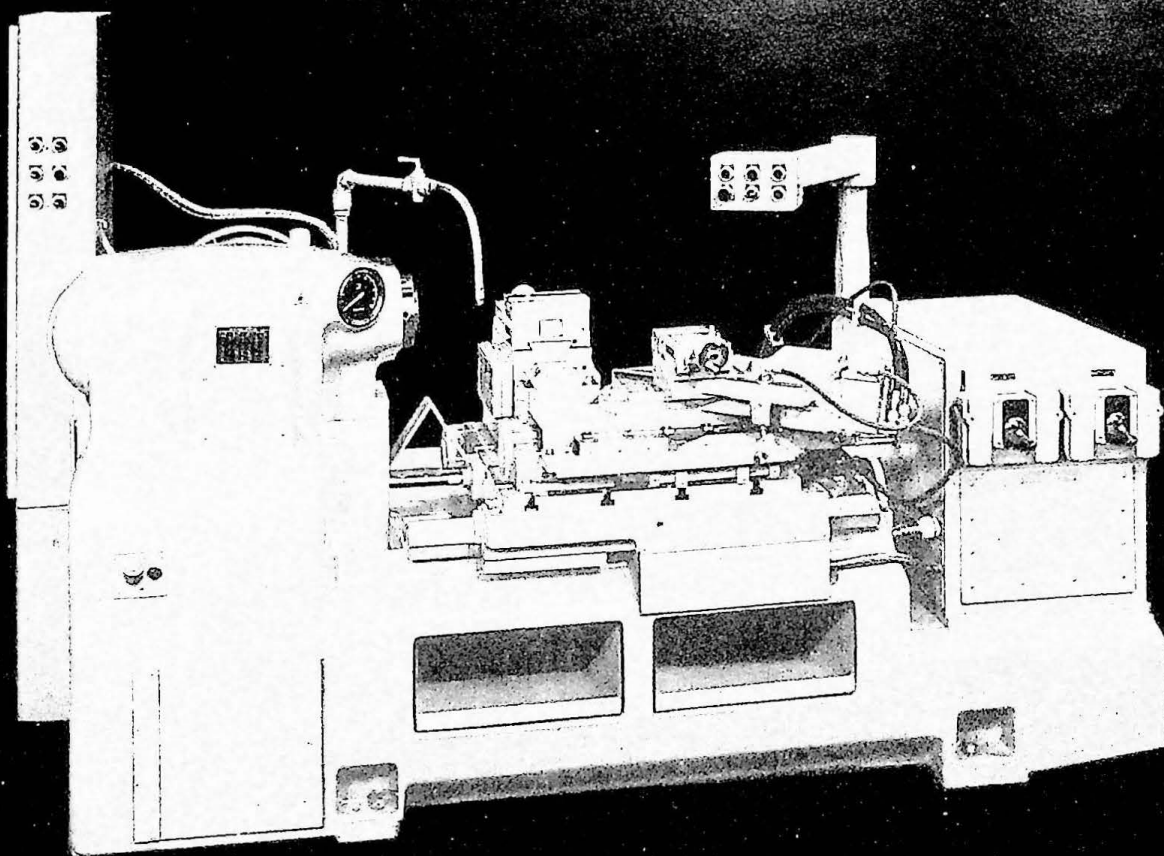

THE HYDRA-SLIDE



Recommended Use. An exceptionally versatile, high production chucking lathe for both first and second operation work. Chief characteristic is a fully automatic cycle which controls practically any desired combination of four different hydraulic slide movements.

Major Features. Basic unit on most of these lathes is a hydraulically operated front slide on which is mounted the well-known Monarch "Air-Gage Tracer." A hydraulically operated rear slide is provided with automatic, hydraulic tool relief. Both the front and rear slides are mounted on a platen with fast hydraulic movement to expedite work piece change.

The "Air-Gage Tracer" slide may be set at a 30°, 45° or 60° angle. Upon removal of the rear slide from the platen, the entire front slide unit may be positioned crosswise on the platen, a particularly advantageous set-up when contour facing

SPECIFICATIONS


Swing over front slide unit	15"
Swing over rear slide unit	13"
Floor space	72" W x 117" L
Motor size	15-20 H.P.
Hole through spindle	2 $\frac{3}{16}$ "
Spindle nose, flange type	6" A-1
Spindle speed ranges	155 to 900 R.P.M. 320 to 1850 R.P.M. 470 to 2700 R.P.M.
Length of platen stroke	12"
Length of front slide stroke	9"
"Air-Gage Tracer" slide settings	30°, 45°, 60°
Length of rear slide stroke	4"
Net weight, with average accessory equipment, including all electrical equipment	9850 lbs.

a large diameter. Rear slide may be swiveled on its ground base between a 90° and a 45° angle to the work center line.

All-electric controls are provided for effortless operation and set-up. Versatility of the machine is such that the automatic cycle may be set up quickly using both the front and rear slides, the front slide only or the rear slide only. The front slide may be made to complete its cut prior to the start of the rear slide cut or vice versa.

The "Air-Gage Tracer" slide, front slide and rear slide ways are flame hardened and precision ground. When the feed is against a stop, as in the case of the platen and the rear slide, a positive type stop is used for the ultimate in accuracy of operation.


Two large chip pans in the base may be pulled out at the rear of the machine for ease of chip removal. Design is arranged in such a manner that a chip conveying system may be applied optionally.

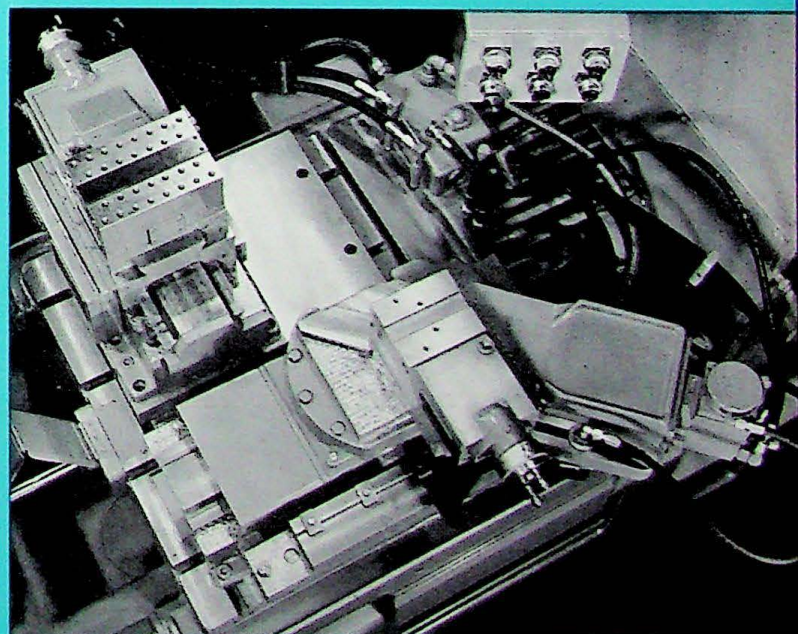

Recommended Use. The Monarch "Air-Gage Tracer" provides a simple, cost-reducing duplicating means for the production turning of multiple-diameter shafts and turning, boring and facing of contours. Application may be made at the factory to any new Monarch lathe from the smallest to the largest sizes.

Major Features. Provides automatic sizing while imparting a smooth, stepless finish because of the continuous, single tool cut. Eliminates the necessity for repetitive measurements.

Having the sensitivity of air-gaging, it produces more accurate work than any other duplicating device. Movement of slide to control point repeats itself within a limit of .0001".

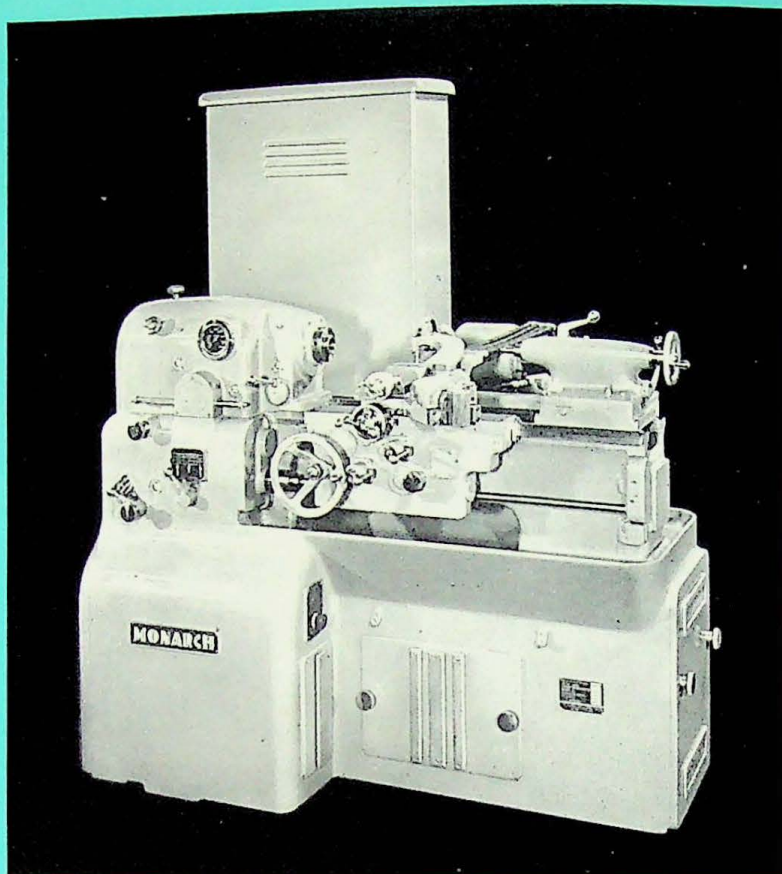

THE "AIR-GAGE TRACER"

Generally reduces by half the amount of stock left for grinding. Often eliminates hand polishing or grinding because of the fine finish imparted.


Eliminates the need for expensive forming tools and the cost of multiple tool set-ups. This allows a complete set-up change in as little as 15 to 20 minutes; tool change in one minute or less.



Reduces the chance for human error, thereby materially reducing the amount of spoiled work.



Air tracer pressure against the template is only about five ounces. As a consequence there is no need to harden the template to protect it against wear.

Available in the rigid type on all models of Monarch lathes, in the swiveling type on some models. Round or flat templates, with critical template adjustment in either case, may be used on all machines.

No limit on length of lathe to which "Air-Gage Tracer" may be applied. All machines so equipped may be used as manually operated lathes, the switch-over from one to the other being made in a matter of seconds.

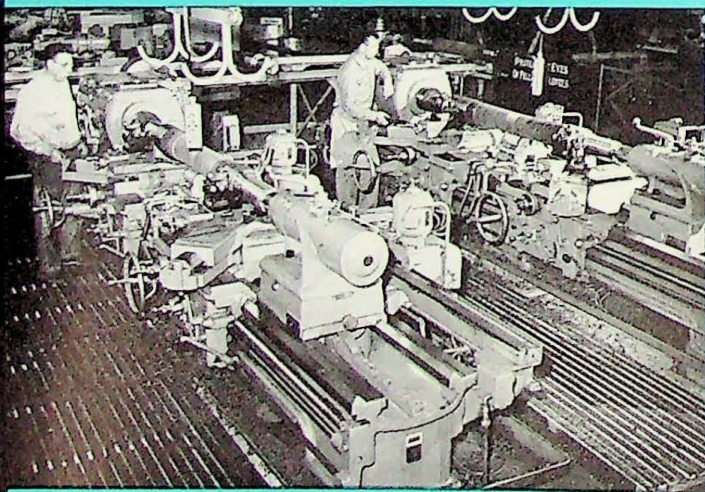

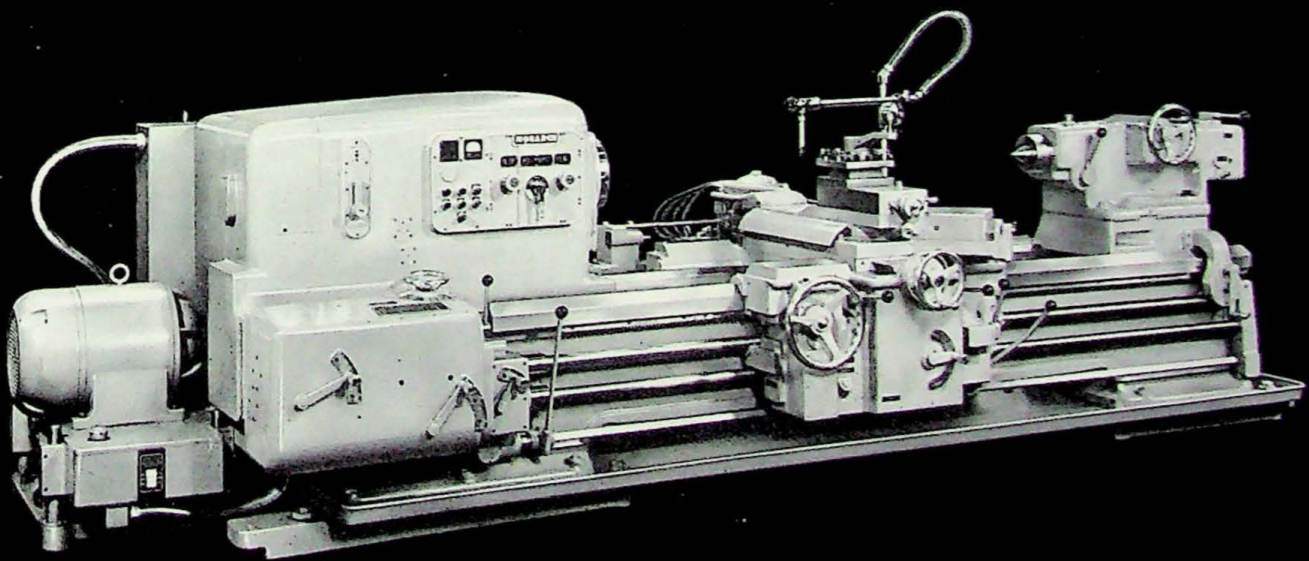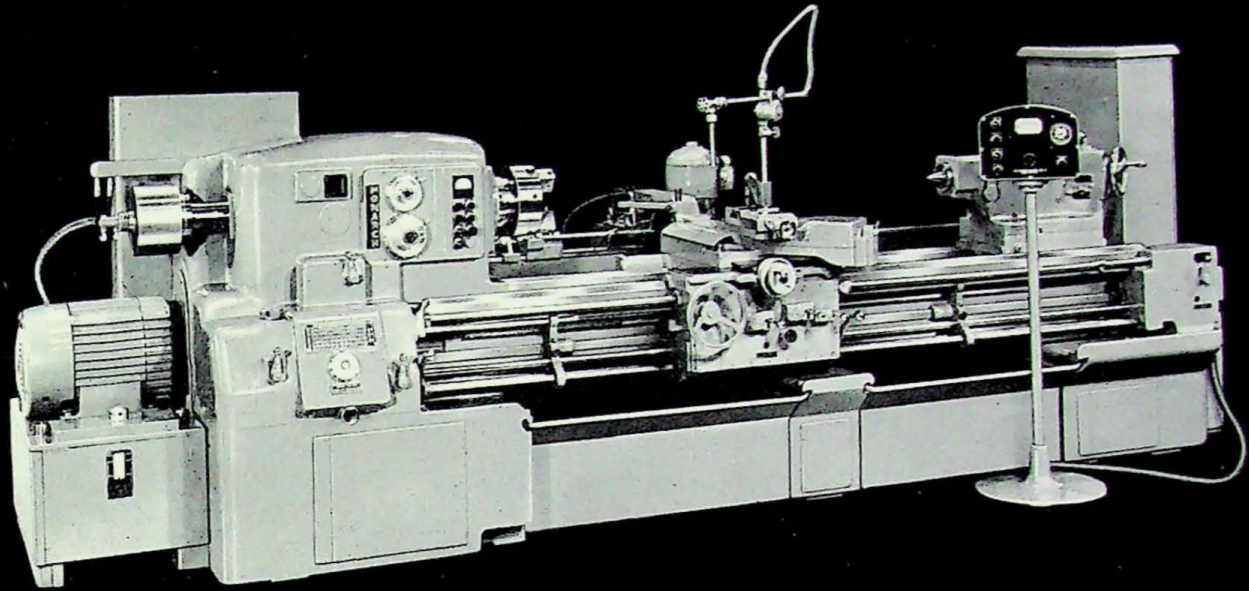

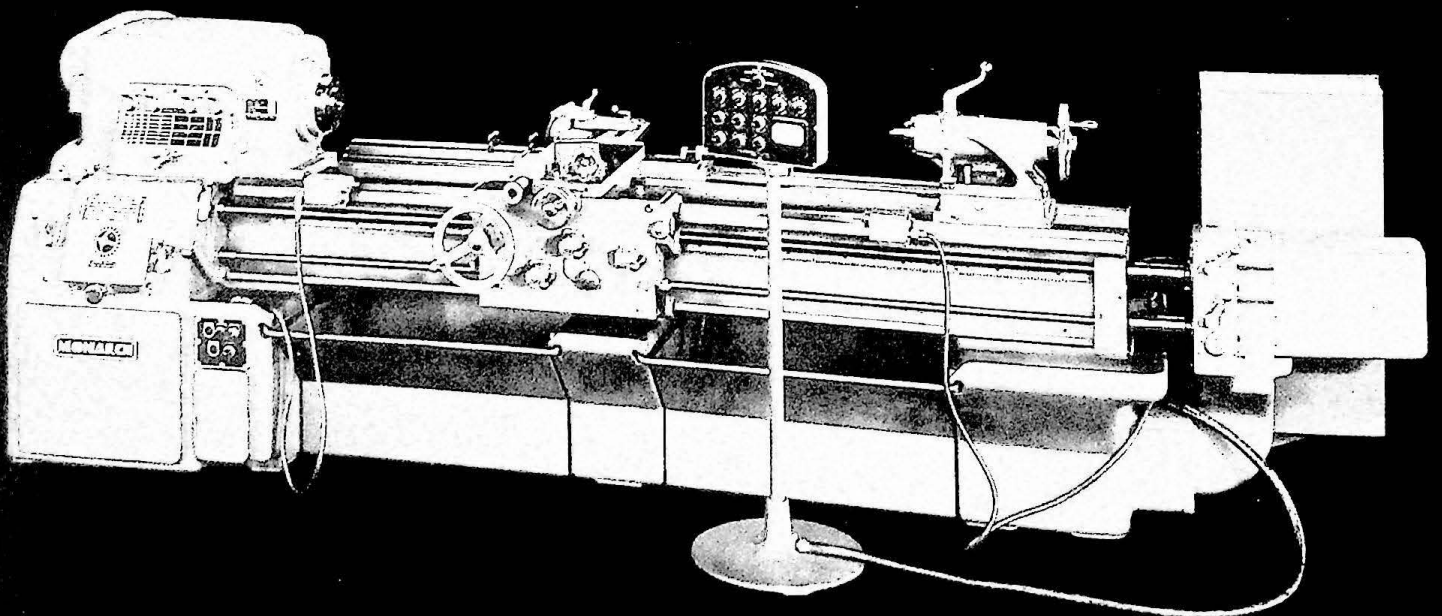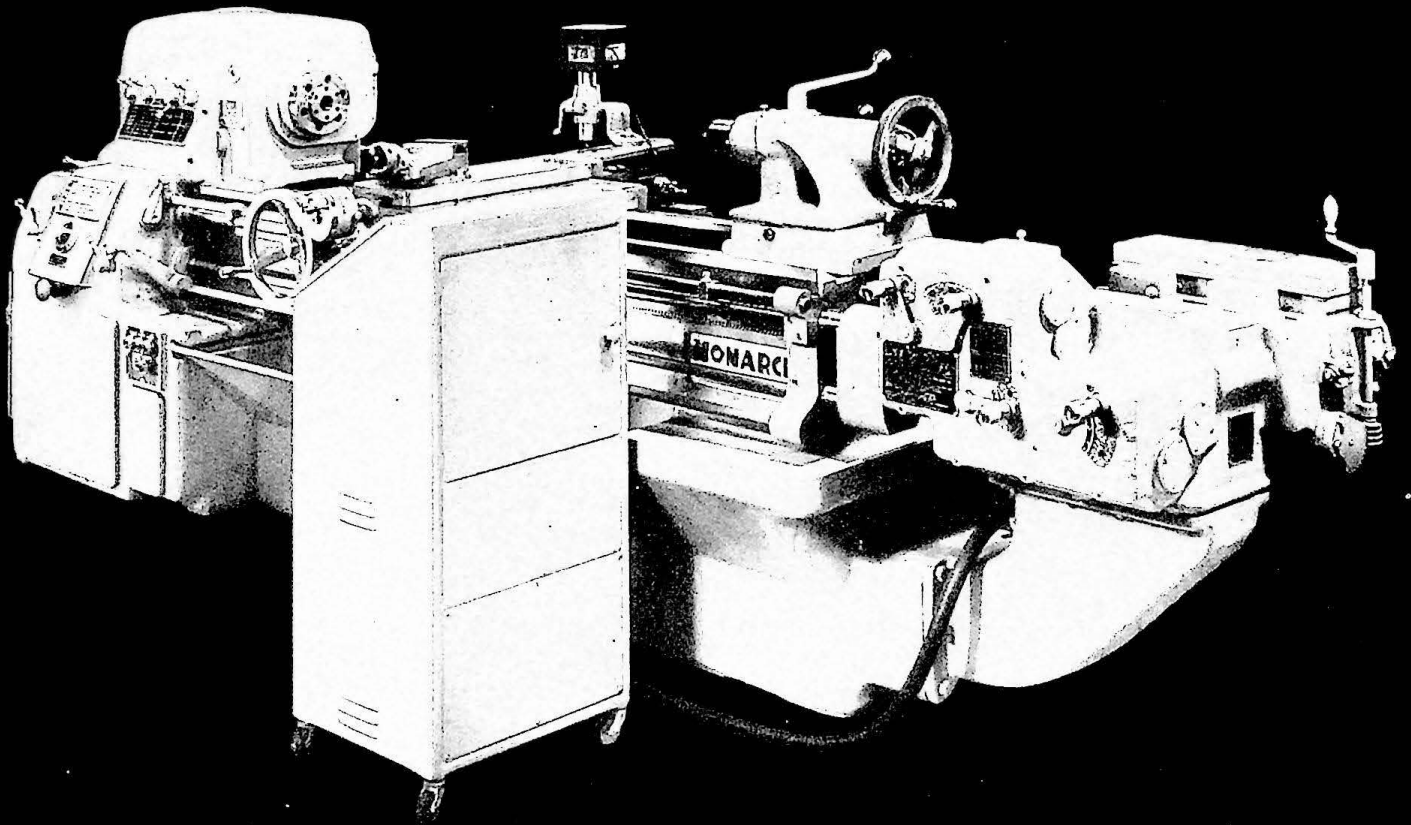

MONARCH-KELLER FORM TURNING MACHINES




Recommended Use. Employed generally for the template controlled turning, boring and facing of intricately shaped molds, dies, punches, form rolls and similar work. May be factory applied to all sizes of Monarch lathes from 16" swing up.

Major Features. Machine controlled electrically from control cabinet which may be positioned convenient to operator. Feed may be created toward, away from or parallel to the work center line. Operation is automatic with the controls energized but machine may be switched over to normal manual operation by a mere flick of a switch.

Small amount of D.C. electric current required by controls supplied by electronic converter in base of control cabinet. Two magnetic clutches drive the leadscrew to provide length feed and two other similar clutches drive the feed rod to provide in or out feed.

Speed of operation surpasses conventional methods by as much as 400 or 500% on some jobs. Ease and quickness of set-up make this method of turning practical for both small and large lot runs.

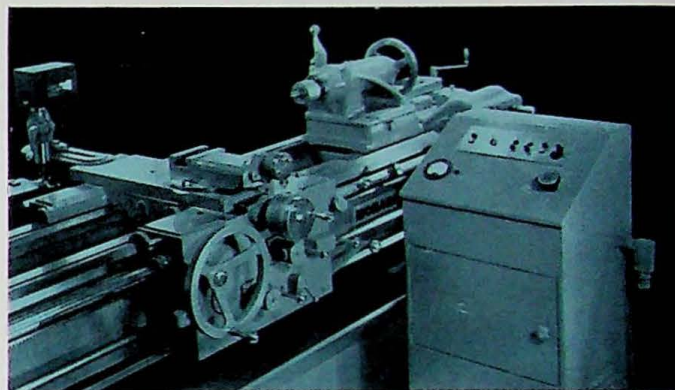


"MOTOR-TRACE" LATHES



Recommended Use. An electric motor operated, electric tracer controlled duplicating attachment which makes a Monarch lathe an automatic cycle machine for producing parts economically in quantities of two or three pieces and up. Factory applied to 16" and 20" Series 61 and 20" Model M machines.


Major Features. Tracing is either from gage blocks, micrometer heads (illustrated to the right) or a flat template. Reason for the practicability of using three different methods of tracer control is that it is unnecessary for tracer to be in constant contact with a template when straight diameter sections are being turned. Tapers, contours, radii or chamfers may be turned when tracing is from a template.

As automatic cycle is fingertip controlled from pedestal type station, one man can operate two machines easily. "Motor-Trace" controls may be disengaged in less than 30 seconds for quick conversion to conventional lathe operation. Application of this control in no way reduces the normal swing capacity of the lathe.

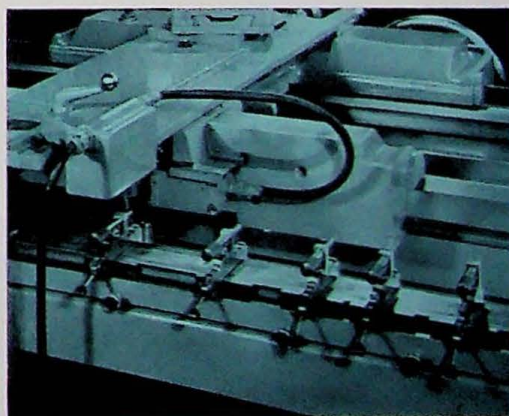

SPECIFICATIONS

Maximum roll diameter body	25"
Length between centers	102", 126"
Floor space, 102" length	121" W x 285" L
Hole through spindle	2 $\frac{3}{8}$ "
Flange type spindle nose	15"
Number of spindle speeds	24
Spindle speed range through spindle drive	10 to 505 R.P.M.
Spindle speed range through face plate drive	2 $\frac{1}{2}$ to 15 R.P.M.
Tailstock quill diameter	6"
Motor size	30 H.P.
Net weight, with average accessory equipment, including all electrical equipment—102" length	31,750 lbs.

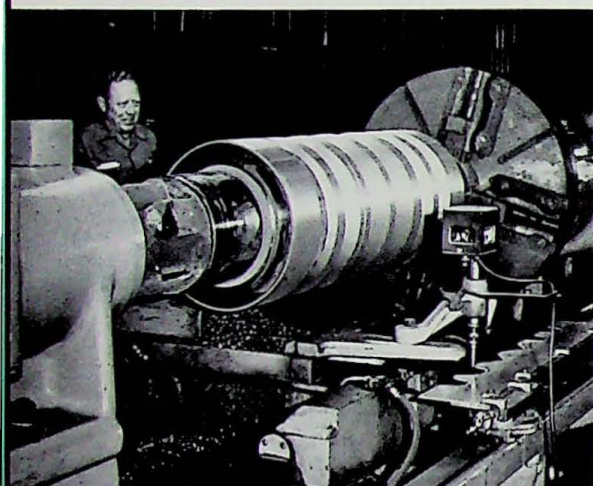


Recommended Use. A template controlled lathe which will turn an almost infinite variety of shapes on the roll face and will handle necks at the same set-up.

Major Features. Since forming of the contour is template controlled, there is no need to match rolls in pairs. Each roll turned from any given template is identical. One of a pair can be redressed or a new one turned with assurance it will match the other. The same template is used for both rough and finish passes.

The hundreds of form tools necessary for conventional roll turning methods are not needed. Only standard carbide round nose and facing tools are employed.

Below—steps in making a mold. From top down are the pattern, master record, mold and end product—a glass bowl.

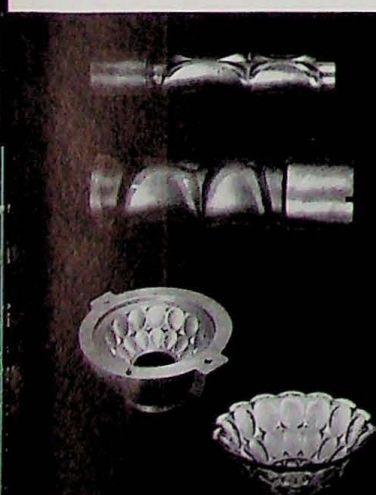

Recommended Use. This machine will reproduce—externally, internally or on a face—any design detail which can be touched by a sharp point tool. Produces intricate molds in the molded glassware industry from 12 to 15, up to as much as 100 times faster than by hand work methods. Similar savings possible in the plastics, mechanical rubber and other industries.


Major Features. Transmits master record shape to the work same size or as a scale reduction in any combination of length, width and engraved depth. Transmits master record shape to the work only once or up to as many as 520 times around the work circumference. Forms many work pieces from a simple disc record. Will machine parts with almost any continually changing shape.

SPECIFICATIONS

Swing over bed—without Monarch-Keller controls	26 $\frac{1}{2}$ "
Swing over bed—with Monarch-Keller controls	18 $\frac{1}{2}$ "
Swing over anti-friction tool slide	10 $\frac{1}{2}$ "
Length between centers	48"
Maximum stroke of anti-friction tool slide	2"
Maximum travel of anti-friction tool slide	10"
Maximum diameter disc or master record which can be accommodated	8"
Maximum length master record which can be accommodated	18"
Regular spindle speed range	17 to 700 R.P.M.
Spindle speed range through face plate drive	2.1 to 40 R.P.M.
Motor size	7 $\frac{1}{2}$ H.P.


THE HEAVY DUTY ROLL-TURNER

16

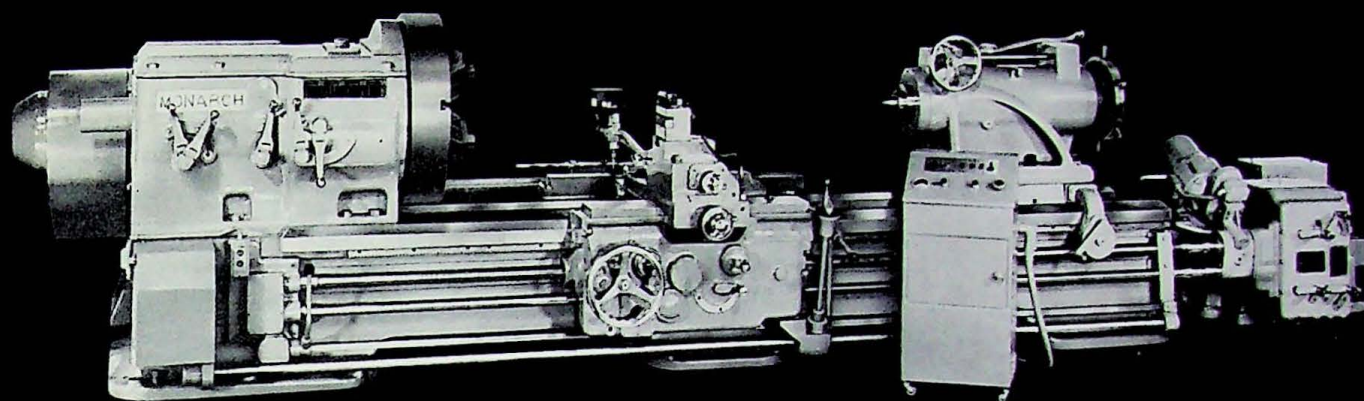

THE SHAPEMASTER ENGRAVER

17

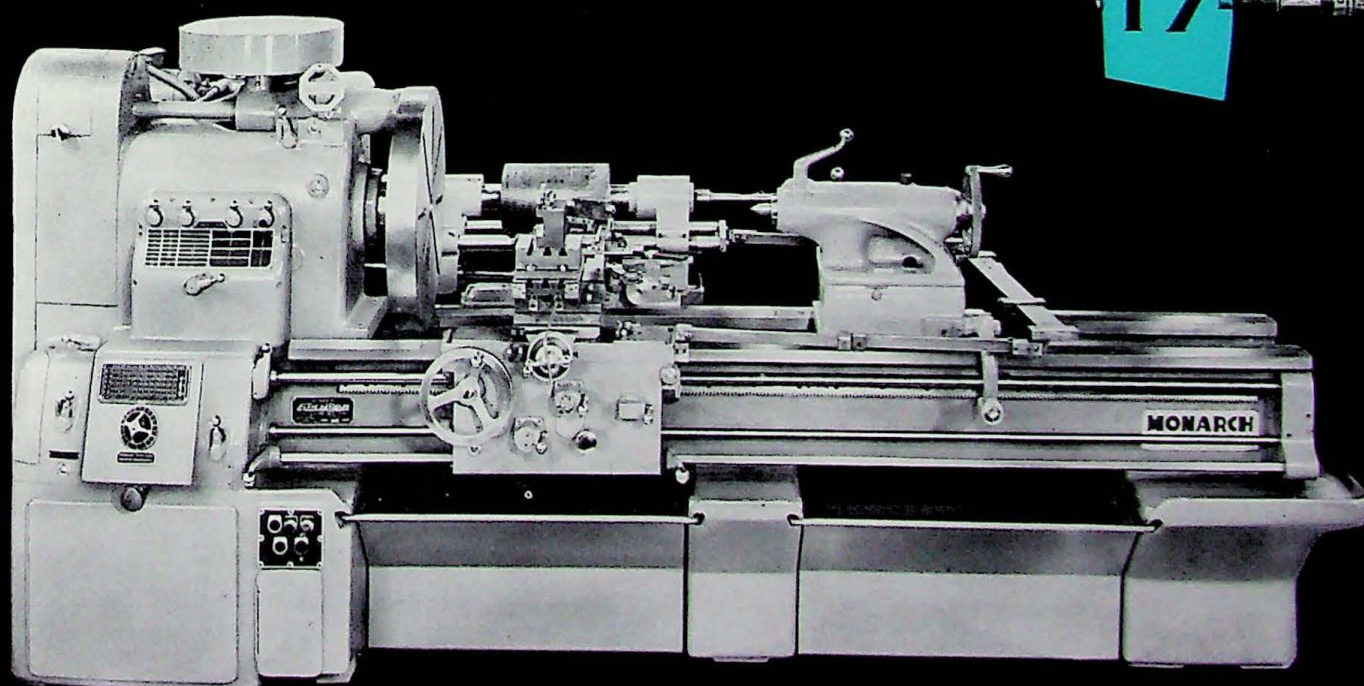





Recommended Use. A chucking type machine for the turning, boring and facing of thin-walled work pieces having large diameter and short length. Employed widely by jet engine manufacturers on such parts as discs, wheels, rings, spacers and shrouds.

Major Features. The Model F (illustrated to the right) is intended primarily for facing. Model O machine (below) is essentially for turning and boring. Both of these machines may be used for all three classes of operations.

Model F machine ordinarily furnished with one "Air-Gage Tracer" controlled slide and is provided with constant surface cutting speed which is operative on both sides of center. Two "Air-Gage Tracer" controlled slides may be used on Model O machine in which case parts may be turned and bored simultaneously.

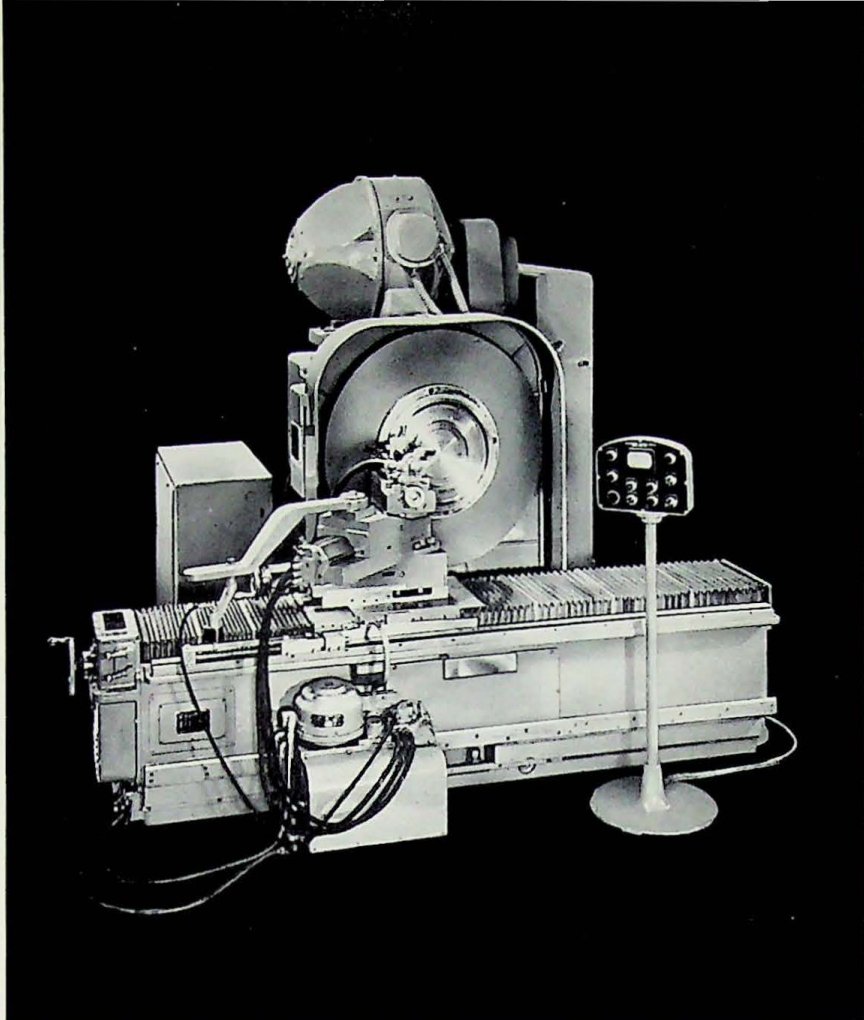

60" RIGHT ANGLE LATHES

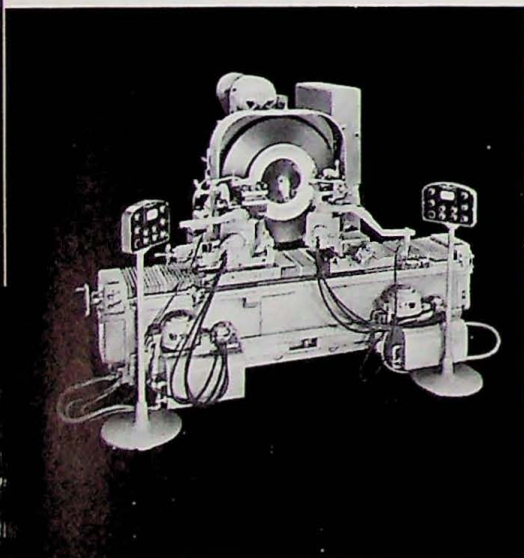

	MODEL F	MODEL O
Swing in gap	60"	60"
Maximum turn diameter	48"	48"
Floor space	121" W x 130" L	132" W x 130" L
Hole through spindle	4 1/4"	2 1/2"
Spindle nose	15"—A-1	15"—A-1
Number of spindle speeds	Infinite	16
Spindle speed range	15 to 760 R.P.M.	6 to 303 R.P.M.
Maximum power angular slide travel	12"	12"
Maximum "Air-Gage Tracer" slide travel	6 5/8"	6 3/4"
Motor size	15 H.P.	20 H.P.
Net weight, with average accessory equipment, including all electrical equipment	19,700 lbs.	19,400 lbs.

SPECIFICATIONS

MONARCH REPRESENTATIVES

BRANCH OFFICES

CHICAGO, ILLINOIS
The Monarch Machine Tool Co., 6645 West
North Ave., Oak Park, Ill. Phone Oak Park:
Euclid 3-4350.

CINCINNATI 37, OHIO
The Monarch Machine Tool Co., The Roger
Building, Office 111, 1720 Section Road.
Phone: Redwood 1-8780.

CLEVELAND 18, OHIO
The Monarch Machine Tool Co., 3091 Mayfield
Road. Phone: Fairmount 1-3500.

DOMESTIC DISTRIBUTORS

BIRMINGHAM 4, ALABAMA
George M. Meriwether, Inc., 1712 Seventh
Avenue, North. Phone: 54-2456.

BOISE, IDAHO
M. R. Priest & Sons, Inc., 515 Highland St.,
Phone: 4-3519

BOSTON, MASSACHUSETTS
Wigglesworth Machinery Co., 60 Border
Street, East Boston 28, Massachusetts.
Phone: LOgan 7-7210.

BUFFALO, NEW YORK
G. W. Brunton and Son, Inc., 2315 Elmwood
Ave., Buffalo 17, New York.
Phone: Victoria 0304.

CHARLESTON, WEST VA.
Wm. S. Bolden Co., Inc., 3416 MacCorkle
Avenue, S. E., Phone: DI 3-5644.

CHARLOTTE 5, NORTH CAROLINA
George A. Marshall Machinery
P. O. Box 9088, Phone: ED 3-2091.

CHATTANOOGA 3, TENNESSEE
Noland Co., Inc., Machine Tool Division,
301 West 8th Street. Phone: 5-3101.

DALLAS 35, TEXAS
Greene Machinery Co., 6300 Wyche Blvd.
Phones: FL 2-7531 and FL 2-7532.

DAYTON 2, OHIO
C. H. Gosiger Machinery Co., Bacon and
McDonough Streets. Phone: Baldwin 8-5174

DENVER 4, COLORADO
F. J. Leonard Company, 1219 California
Street. Room 201. Phone: Keystone 4-7229.

GREEN BAY, WISCONSIN
Bay Verte Machinery Company, 127-131
North Pearl Street. Phones: Hemlock 5-4437
and 5-4438.

HARTFORD, CONNECTICUT
O. C. Stevens Machinery Co., Inc., 76 LaSalle
Road, West Hartford 7, Connecticut.
Phone: Adams 3-3659.

HOUSTON 1, TEXAS
Steel & Machine Tool Sales Co., 6416
Navigation Blvd., P. O. Box 1716.
Phones: Walnut 1-7113, 1-7114, 1-7115.

KANSAS CITY 8, MISSOURI
Fuchs Machinery & Supply Co., 1823 Walnut
St. Phone: Victor 2-3558.

LOS ANGELES 22, CALIFORNIA
Moore Machinery Company, 3200 S. Garfield
Avenue. Phone: Raymond 3-7111.

MEMPHIS 11, TENNESSEE
Hicks Machine Tool Co.
673 South Cooper Street
Phone: BRoadway 6-2741.

MINNEAPOLIS 1, MINNESOTA
The John C. Eide Company, 746 Fourth St.,
North. Phone: FEderal 9-7621.

NEW ORLEANS 12, LOUISIANA
Richards and Holmes Machinery Inc., 625
South Peters Street. Phone: Raymond 7281.

OMAHA 2, NEBRASKA
Fuchs Machinery & Supply Co., 2401 North
11th St. Phone: Atlantic 7050.

ORLANDO, FLORIDA
Harry P. Leu, Inc., 100 W. Livingston Ave.
Phone: GA 2-9891.

PHILADELPHIA, PENNSYLVANIA
Machinery Associates, Inc., 325 E. Lancaster
Ave., Wynnewood, Pa. Phone: Midway 2-8200.

DETROIT 38, MICHIGAN
The Monarch Machine Tool Co., 10600
Puritan. Phones: Diamond 1-2728 and 1-2729.

INDIANAPOLIS 5, INDIANA
The Monarch Machine Tool Co., Maco
Building, Room 12, 709 East 38th Street.
Phone: Walnut 3-2925.

MONTCLAIR, NEW JERSEY
The Monarch Machine Tool Co., 484
Bloomfield Avenue. Phone: Pilgrim 6-3700.

PITTSBURGH 20, PENNSYLVANIA
The Monarch Machine Tool Co., 962
Greentree Road. Phones: Walnut 1-2969 and
Walnut 1-2970.

PORTLAND 12, OREGON
Hallidie Machinery Co., Portland Division,
1915 N. E. Union. Phone: ATLantic 2-2244.

ROCHESTER 4, NEW YORK
G. W. Brunton & Son, Inc., 548 Chili Ave.
Phone: Genesee 7182.

ST. LOUIS 10, MISSOURI
Colcord-Wright Machinery & Supply Co.,
6115 Eveline Avenue. Phone: Mission 7-4400.

SALT LAKE CITY 10, UTAH
The Galigher Company, 545 West Eighth
South Street. Phone: Elgin 9-8731.

SAN FRANCISCO, CALIFORNIA
Moore Machinery Company, 7th and Carleton
Streets, Berkeley 10, California.
Phone: THornwall 3-1636.

SAN JOSE 26, CALIFORNIA
Moore Machinery Co., 656 Stockton Ave.
Phone: Cypress 7-4070.

SEATTLE 4, WASHINGTON
Hallidie Machinery Co., Inc., 210 Hudson St.,
South. Phone: Lander 9520.

SHREVEPORT 98, LOUISIANA
Richards Machinery and Supply Co.,
200 Edwards Street. Phone: 2-0331.

SYRACUSE 6, NEW YORK
The H. A. Smith Machinery Company
P. O. Box 123, Eastwood Station
Phone: HOWard 3-8606.

TULSA 3, OKLAHOMA
Gorton-Howell Machinery Co., 217 East
Third Street. Phone: LUther 4-4778.

CANADIAN DISTRIBUTORS

MONTREAL 3, QUEBEC
Williams & Wilson, Limited, 544 Inspector
Street. Phone: University 6-2851.

OTTAWA, ONTARIO
Williams & Wilson, Limited, 136 Sparks
Street. Phone: Central 55845.

QUEBEC, QUEBEC
Williams & Wilson, Limited, Price Building,
P. O. Box 158. Phone: LA 25862.

TORONTO 1, ONTARIO
Williams & Wilson, Limited, 71 Front Street,
East. Phone: Empire 3-8731.

WINDSOR, ONTARIO
Williams & Wilson, Limited, 1465 Tecumseh
Blvd. Phone: CLearwater 3-5676.

WINNIPEG, MANITOBA
T. S. Taylor Machinery Co., 1600 Portage
Avenue. Phone: SPruce 4-4577.

OVERSEAS DISTRIBUTORS

Amertool Services, Inc.

ARGENTINA, Buenos Aires
Negroni Hnos, S.R.L., Peru 707.

BOLIVIA, LaPaz
International Machinery Co., (Bolivia) S.A.,
Postal Box 815.

BRAZIL, Sao Paulo
Panambra S.A., Caixa Postal 5034.

CHILE, Santiago
International Machinery Co., Casilla 107-D.

COLOMBIA, Bogota
Pantecnica Ltda.
Av. Caracas No. 19-86.

COSTA RICA, San Jose
Costa Rica Machinery Co., Inc.
P. O. Box 1328.

CUBA, Habana
Zaldo Y Martinez, S.A.
Zanja Y Hospital, Apartado 769.

DOMINICAN REPUBLIC, Ciudad Trujillo
Ramca Compania por Acciones
30 de Marzo 139, P. O. Box 664.

ECUADOR, Guayaquil, Quito
La Comercial Importadora S. A., P. O. Box
982, Gonzalo Gonzalez B., P. O. Box No. 30.

HONDURAS, Tegucigalpa, D.C.
Casa Comercial Mathews, S. A.
Apartado Postal 39

MEXICO, Mexico D. F.
Representaciones Argostal, S. A.
Apartado Postal 2511.

NICARAGUA, Managua
E. R. McGuire
La Calle, Suroeste 107.

PERU, Lima
International Machinery Co., Casilla 1843.
PUERTO RICO, Ponce, San Juan
Puerto Rico Iron Works, Inc.

URUGUAY, Montevideo
Pesce & Simeone S. A., Daniel Munoz 1982-
1992.

VENEZUELA, Caracas
S.A.V.E.R. Guinand, Apartado 668.

AUSTRALIA, Camperdown, New South Wales
Norman N. Benson & Co., 110 Parramatta Rd.

AUSTRIA, Vienna I
Julius F. Hendrich, Rathausstrasse 3.

BELGIUM, Bruxelles
S. A. Isbecque Todd, 27 Boulevard Emile
Bockstael.

DENMARK, Copenhagen
Leo Madsen, Borgergade 10.

ENGLAND, London
Rockwell Machine Tool Co., Ltd., Welsh Harp,
Edgware Rd.

FINLAND, Helsinki K
OY Machinery AB, P. O. Box 129.

FRANCE, Paris
Aux Forges de Vulcaïn, 3 Rue Saint-Denis.

GERMANY, Wiesbaden
Stenzel & Company, Kaiser Friedrich.

GREECE, Athens
Technica S. Maltotsis, S.A., 52 Socratous St.

HAWAII, Honolulu 10
Grace Brothers, Ltd., P. O. Box 78.

INDIA, Bombay 1
Mahindra & Mahindra Limited
Gateway Building, Apollo Bunder

INDONESIA, Bandung, Java
N. V. Landre & Glinderman,
Djalan Tjendana 14.

ISRAEL, Tel-Aviv
Josef Rosenthaler, Merkaz Mischari St. 22.

ITALY, Milano
Ing. Scotti & Garrone, Via Palestrina 33

JAPAN, Tokyo
Toyo Menka Kaisha, Ltd., P. O. Box 183.

KOREA, Seoul
Claggett, Nolan Co. Inc., P. O. Box 282.
Kwang Hwa Moon

NETHERLANDS, Amsterdam C
N. V. Landre & Glinderman, Spuistraat 6-8.

NEW ZEALAND, Wellington, C.I.
Jas. J. Niven & Co., Ltd., 65-67 Taranaki St.

NORWAY, Oslo
A/S G. Hartmann, Kirkegt 7, Postboks Nr. 1

PAKISTAN, Karachi
Dean & Webber (Karachi) Nelsons Chambers,
McLeod Road. G.P.O. Box 259.

PORTUGAL, Oporto
Globo-Sociedade de Equipamentos,
Industriais, Lda.

SOUTH AFRICA, Johannesburg
Machine Tools (Pty.) Ltd., P. O. Box 5458.

SPAIN, Madrid
Hijo de Miguel Mateu, Alcalá 45.
Apartado 1008.

SWEDEN, Stockholm
Mekanik Ingenjorsfirma, Regeringsgatan 85.

SWITZERLAND, Zurich 35
B. Schinz & Co., Beckenhof St. 6.

TAIWAN (FORMOSA), Taipei
Wm. Hunt & Co. (International) Inc., 93
Chung Shan Road, N., Section 2.

TURKEY, Istanbul
Etablissement Mehmet Vasil, P. O. Box 143.

THE MONARCH MACHINE TOOL COMPANY • SIDNEY, OHIO