

2711

INSTRUCTIONS FOR ASSEMBLING
CRAFTSMAN PEDESTAL STAND
CATALOG NO. 9-2964

FOR USE WITH 1/4, 1/3, 1/2, AND 3/4 H.P. GRINDERS

1. Insert square head set screw into threaded hole in base and top mounting plate.
2. Place column in base and top mounting plate so that the end of the column is even with the end of the hole in base and top. Tighten screws securely.

INSTALLATION

3. The pedestal should be attached to the floor to prevent the grinder from tipping. Holes are provided in the base for this purpose.


Before securing the base to the floor, make sure the top plate of the pedestal is level. The mounting holes in the top plate should be toward the front.

If the floor is uneven or not level, place metal shims under the appropriate corners, between the pedestal base and the floor before tightening bolts or screws.


MOUNTING THE GRINDER

The 1/4, 1/3, and 1/2 H.P. Grinders are attached to the top of the pedestal as shown below. Use two 5/16" - 18 x 2-1/2" bolts. Place a washer under head of bolt and between first nut and top plate of pedestal. Tighten first nut so as to compress rubber bushing as shown. Then while holding the first nut, tighten the second nut against the first.

The 3/4 H.P. Grinder is attached to the top of the pedestal as shown below. Use two 5/16" - 18x2" bolts, place two washers on each bolt and tighten bolts.

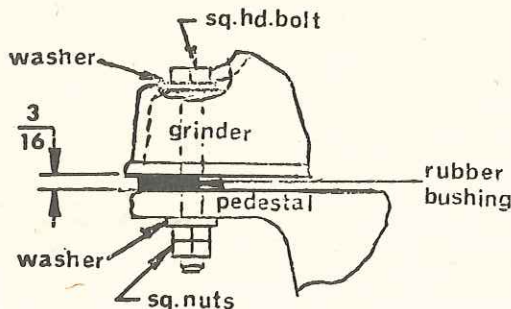

1/4; 1/3; & 1/2 H.P. Grinder Mounting

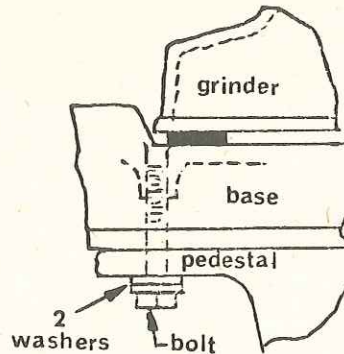

3/4 H.P. Grinder mounting

SEARS, ROEBUCK AND CO. - U.S.A.
IN CANADA, SIMPSONS-SEARS LIMITED