

ESTABLISHED 1840 65 ACRES

HENRY DISSTON & SONS
INCORPORATED
KEYSTONE SAW, TOOL, STEEL AND FILE WORKS
PHILADELPHIA, U.S. A.

3600 EMPLOYEES 68 BUILDINGS

### IMPORTANT NOTICE

FLUCTUATING prices of raw materials and labor have made changes in the selling price of our products, from time to time, unavoidable. Therefore, this catalog is used only to illustrate and describe the various Disston products—the list prices shown are not intended as an accurate indication of the selling price of Disston Saws, Files and Tools.

We request that anyone wishing the correct selling price of any item listed in the catalog consult their local dealer or, if this is not convenient, write directly to us for prices on items in which they are interested.


Any saws or tools of our manufacture not obtainable from your jobber will be supplied direct by the factory, provided the name of the jobber is mentioned, through whom they will be invoiced.

HENRY DISSTON & SONS, Inc.

# HENRY DISSTON & SONS

# KEYSTONE SAW, TOOL, STEEL AND FILE WORKS

PHILADELPHIA, U. S. A.



CHICAGO, ILL. NEW ORLEANS, LA. SEATTLE, WASH. NEW YORK BRANCH HOUSES: BOSTON, MASS. MEMPHIS, TENN. CINCINNATI, OHIO SYDNEY, AUSTRALIA

BANGOR, MAINE SAN FRANCISCO, CAL. PORTLAND, ORE. VANCOUVER, B. C.

CANADIAN WORKS: TORONTO, CANADA

JANUARY, 1918

THIRD REVISED EDITION



SPECIAL attention is called to new goods added to the standard line in this new PRICE-LIST of JANUARY, 1918, the merits of which are fully established with the trade and mechanics generally.

Our desire is to impress upon the Trade and all Users, that in addition to the most complete line of Saws manufactured, there is a large variety of Carpenters', Bricklayers' and other Mechanics' Tools of that same "HIGH DISSTON STANDARD"—making these TOOLS the same VALUED ASSET to the Merchants' Stock as DISSTON Saws.

HENRY DISSTON, prior to 1855, imported all the steel used by him in the manufacture of DISSTON Saws; in that year he built and operated his own CRUCIBLE STEEL PLANT, where, employing his wide knowledge of SAW requirements, he carefully investigated and experimented, until he discovered a formula which enabled him to produce the fittest SAWS FEEL in the WORLD. From time to time the safter other Demulas were developed and thoroughly tested for the respective needs of other TOOLS bearing the BRAND of DISSTON. This seel Plant, the first and for a long time the only CRUCIBLE SAW STEEL Plank in the United States, has been continued by HENRY DISSTON & SONS. The improvement of SAWS, TOOLS, FILES, KNIVES, Etc.

In the quality of STEEL, therefore, lies the first of a series of reasons for the continued wonderful efficiency of the DISSTON BRAND GOODS.

The plant of HENRY DISSTON & SONS was established in 1840, and now consists of 65 acres, 68 buildings in which 3600 employees are at work, progression being strikingly shown by the up-to-date buildings, sanitary appliances and the equipment which consists of the latest improved machinery, much of which was originated and built in the Disston Works.

These remarkable facilities guarantee the HIGHEST STAND-ARD of QUALITY, and EFFICIENCY of all SAWS, TOOLS, FILES, KNIVES, Etc., bearing the BRAND of DISSTON.

HENRY DISSTON & SONS
INCORPORATED

Keystone Saw, Tool, Steel and File Works
PHILADELPHIA, U. S. A.



### "KEYSTONE"

### TRADE MARKS REGISTERED U. S. PATENT OFFICE

IN addition to the above, many of our other TRADE MARKS and TRADE NAMES are REGISTERED in this and Foreign Countries.

All persons are cautioned against using any of our Trade Marks or Trade Names, except for the purpose of indicating that the goods identified thereby were manufactured by us.

We also caution all persons against imitating the labels we use to identify and describe the articles we manufacture.

HENRY DISSTON & SONS INCORPORATED

101288

### NOTICE

A LL ORDERS from persons unknown to us must be accompanied with cash or good commercial reference, unless the goods are to be shipped C. O. D., in which case we require a deposit sufficient to cover express charges both ways, as a guaranty that the goods will be taken from the express office promptly on arrival. Shipments made by parcel post to all parts of the United States and its possessions in accordance with the rules of the Post Office Department, the amount of postage will be charged net on invoice, not subject to the cash discount.

REMITTANCES should be made by P. O. Money Order, Registered Letter, Draft on Philadelphia or New York, or by Express, which will insure safe delivery. When sent by express, the charges must be prepaid. Bills unpaid by the 20th proximo, will be drawn for at sight.

PROPER SHIPPING INSTRUCTIONS should be given, to prevent delay, expense and annoyance to customers.

ALL GOODS SHIPPED AT PURCHASER'S RISK AND INVOICED
AT CURRENT RATES WHEN SHIPPED

PRICES are F. O. B. cars or boat Philadelphia.

QUOTATIONS subject to change without notice, correction of stenographic or typographical errors, and are contingent upon accidents, strikes and other delays unavoidable or beyond our control.

### WHEN SENDING SAWS FOR REPAIRS

THE NAME OF OWNER SHOULD APPEAR ON EACH in order to identify it when received, thus avoiding delay. Mail us full instructions for the work to be done, stating the hand, speed, and feed of the mill, and shipping directions for the return of the saw.

MARK PACKAGE PLAINLY, TACONY, PHILADELPHIA, U.S. A.

HENRY DISSTON & SONS INCORPORATED

### TERMS OF WARRANTY

EVERY SAW bearing the brand of "DISSTON" is warranted as true as it is possible to make it, free from flaws and seams. When found defective in any of these particulars, it may be returned, and if on examination we are satisfied the saw is at fault, all necessary repairs will be made free of charge, or a new saw given in exchange, provided it is returned within thirty days from delivery.

Our warranty does not cover cases where saws have been cracked in gumming by reason of the punches or dies not being kept in proper order; or by filing square corners in the gullets; or by excessive emery-wheel grinding, reaming or altering the centre-holes, which is apt to cause the saws to spring.

HENRY DISSTON & SONS INCORPORATED

Mill-men, manufacturers of lumber and all saw users should read the "Dieston Lumberman's Handbook" on Saws.
It is furnished free upon application.

### DISSTON CRUCIBLE STEEL

Our facilities for making and rolling crucible steel being more than adequate for our own purposes, we are in position to furnish the trade with the following classes:

DISSTON TOOL STEELS SPECIAL HIGH-SPEED STEEL SPECIAL TOOL BEST TOOL
EXTRA TOOL
STANDARD TOOL

DISSTON SAW AND SHEET STEELS SPECIAL HIGH-SPEED MILLING

### DISSTON MISCELLANEOUS STEELS

FILE STEEL

PLIER STEEL

SCREWDRIVER STEEL

HAMMER STEEL

AXE, HATCHET, CHISEL STEEL

AUGER BIT STEEL

MAGNET STEEL

CANT HOOK STEEL

SKATE STEEL

FORK AND HOE STEEL

DIE STEEL


TROWEL STEEL

MATTOCK STEEL

SPRING STEEL, ETC.

COLD-ROLLED STEEL COLD-ROLLED HARDENED AND TEMPERED COLD-ROLLED HARDENED, TEMPERED AND POLISHED

Prices quoted on application



The above cut illustrates various Styles of Teeth for Circular Saws. By referring to this when ordering, customers will be enabled to indicate to us the style of tooth required; gauge or thickness per list below.

Adapted to any partern of Solid Tooth Saw, particularly circular Cut-off Saws. Allows for expansion and contraction of rim, lessening risk of breakage.

SOLID TOOTH: For Crosscutting Ripping Nos. 2, 4 5 and 17 Nos. 11, 12, 13 and 14 Ripping or Crosscutting Nos. 1, 6 and 8 No. 18

INSERTED
The CHISEL TOOTH is the best form for general mill use. No. 10 is used principally on the Pacific Coost. No. 16 is adapted for thin saws, re-tawing, rec. The AMERICAN, TRENTON, PROSSER, DUNBAR and GOULDING are styles formerly made by The American Saw Canadian Country.

### DISSTON STANDARD GAUGE

CORRESPONDS EXACTLY WITH THE STUBBS' ENGLISH GAUGE

Gauge	Decimals of Inch	Fractional Part of Inch	Millimeter Equivalent	Gauge	Decimals of Inch	Fractional Part of Inch	Millimeter Equivalent
0000	.454		11.53	17	.058	1-16 Scant	1.47
000	.425		10.79	18	.049	3-64 Full	1.24
00	.380		9.65	19	.042	3-64 Scant	1.07
0	.340	22-64 Scant	8.64	20	.035	1-32 Full	.89
1	.300	19-64 Full	7.62	21	.032		.81
2	.284	9-32 Full	7.21	22	.028		.71
3	.259	17-64 Scant	6.58	23	.025		.63
4	.238	15-64 Full	6.04	24	.022		. 56
-5	.220	7-32 Full	5.59	25	.020		.51
6	. 203	13-64 Scant	5.16	26	.018		.46
7	.180	3-16 Scant	4.57	27	.016		.41
8	. 165	11-64 Scant	4.19	28	.014		.36
9	.148	9-64 Full	3.76	29	.013		.33
10	.134	1-8 Full	3.40	30	.012		. 30
11	.120	1-8 Scant	3.05	31	.010		. 25
12	. 109	7-64	2.77	32	.009		. 23
13	.095	3-32 Full	2.41	33	.008		.20
14	.083	5-64 Full	2.11	34	.007		.18
15	.072	5-64 Scant	1.83	35	.005		.13
16	.065	1-16 Full	1.65				


## THE STANDARD NUMBER OF TEETH IN CIRCULAR SAWS

Diameter Inches	Cut-off	Rip	Diameter Inches	Cut-off	Rip				
3	72	30	36	60	32	}			
4	80	36	38	60	32				
4 5 6	90	36	40	72 to 80					
6	90	36	42	72 to 80			_		
7	90	36	44	72 to 80					Mills of
8	90	36	46	80	32 to 40	large car	pacity:	runn	ing Saws
9	90	36	48	80	32 to 40				
10	72	30	50	80	32 to 40	750 to 800	Rev.	800	to 900 Rev.
12	60	32	52	90	32 to 50				
14	60	32	54	90	32 to 50				
16	60	32	56	90	32 to 50	80			90
18	60	32	58	100	40 to 60	80			90
20	60	32	60	100	40 to 60	80			90
22	60	32	62	100	10 00	80			90
24	60	32	64	120		80			90 90
26	60	32	66	120				l	90
28	60	32	68	126				İ	,,,
30	60	32	70	130					
32	60	32	72	130	1				
34	60	32	12	130		1			
34	00	32				1			
Diameter Inches	Lach Saws	Bolters	Edgers	Trimmers	Slashers	Resaws	Shing	les	Heading Saws
12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 44 44 46 50 50 50 50 50 50 50 50 50 50 50 50 50	32 32 36 36   	36 36 40 40 	32 32 32 	72 72 72 72 72 	72 72 72 72 72 80 80 80	50 to 80	60 to 60 to 60 to 60 to	100 100	80 80 80 90 90 100

# LEFT-HAND SAW

RIGHT-HAND SAW





# WHEN ORDERING CIRCULAR SAWS, THE POLLOWING DIRECTIONS SHOULD BE EXPLICITLY GIVEN

Diameter in Inches,
Thickness or Gauge at Centre,
Thickness or Gauge at Rim,
Right- or Left-Hand (See above Illustrations),
Rip or Gross-Cut Tooth,
Style of Tooth (See Illustrations on page 7),
Number of Teeth,

Size of Pin Holes,
Distance from Centre to Centre of Pin Holes,
Greatest Feed at each Revolution, in Inches,
Kind of Tlimber to be Sawed,
Number of Revolutions per minute,
Horse Power of Engine,

Saily output of Mill.

All stock Saws, 40 inches in diameter and larger, have 2-inch mandrel hole and finch tug-pin holes, 3 inches from centre to centre. If wanted different, send full pattern of holes.

Size of Mandrel Hole,

### INSERTED TOOTH CIRCULAR SAWS



### CHISEL TOOTH SAW

### For prices, see page 12

Duplicate	Points,	Nos.	1 and	19\$5.50 per 1	.00
"	"	44	2 "	8 5.25 "	"
**	**	44	3, 33	, 4, 44, 4½, 6 and 7 5.00 "	44
"	Holders,	**	1 and	19	
**	"	"	2 "	8	
"	44	"	3, 33	, 4, 44, 4½, 6 and 7	

New Saws 42 inches and less in diameter, beveled one gauge without extra charge; saws 44 inches and over in diameter, beveled two gauges without extra charge.

No extra charge for saws one gauge thicker than list.

No extra charge for saws one to three gauges thinner than list; when more than three gauges thinner, add 5% to list for each gauge.

Saws 48 inches and under, and 62 inches and over in diameter, more than two gauges thinner than list, not warranted. Saws 50 to 60 inches in diameter thinner than 10 gauge—not warranted.


With each Chisel Tooth Saw, we include a wrench, one set of extra Points, and two extra Holders.

Always give number of the saw when ordering duplicate teeth and holders






### CHISEL TOOTH, No. 33



Diam. Inches	Thickness Gauge	Standard No. of Teeth	Greatest Number of Teeth that can be put in No. 33 Saw	Siz Ho	e of de	Price Each	Extra for Each Gauge Heavier	(Gr Ber	india	rw Saws ag or g Old stra)
16	10	12	12	11	inch	\$39.00	\$0.50	\$0.75	per	gauge
18	10	14	14	11	14	44.00	.60	.90	"	- "
20	9	14	16	15	4.6	50.00	.75	1.05	44	**
22	9	16	18	15	**	56.00	.90	1.20	**	44
24	9	18	18	13	**	62.00	1.05	1.35	**	44
26	9	18	20	13	**	68.00	1.25	1.55	**	**
28	9	18	22	11/2	**	74.00	1.50	1.75	"	**
30	9	20	24	14	**	80.00	1.75	1.95	66	44
32	8	22	26	15	44	88.00	2.00	2.15	44	44
34	8	22	28	15	44	97.00	2.25	2.35	"	44
36	8	24	30.	15	4.4	106.00	2.60	2.55	16	44
38	8	24	32	15	44	115.00	3.00	2.75	"	66
40	8	26	34	2	**	125.00	3.40	2.95	44	66
42	8	28	36	2	4.4	137.00	3.80	3.25	**	44
44	8	30	38	2	**	150.00	4.40	3.55	46	16
46	8	32	40	2	66	165.00	5.15	3.85	44	**
48	8	34	42	2	16	180.00	5.90	4.15	**	44
50	8	36	44	2	**	200.00	6.65	4.45	"	44
52	7	38	44	2	**	220.00	7.40	4.80	46	ci.
54	7	40	46	2	44	250.00	8.80	5.15	44	**
56	7	42	48	2	**	280.00	10.25	5.50	**	**
58	7	44	50	2	**	310.00	11.75	5.95	**	"
60	7	46	52	2	16	340.00	13.25	6.40	44	. "
62	6	48	54	2	44	380.00	14.75	6.85	44	66
64	6	48	56	2	4.0	425.00	17.60	7.35	**	**
66	6	50	58	2	44	470.00	22.00	7.85	**	44
68	6	52	60	2	44	520.00	26.40	8.45	66	46
70	6	54	62	2	44	570.00	30.80	9.05	44	**
72	6	56	64	2	44	620.00	35.20	9.65	46	**

One extra set of teeth or bits, two extra holders or shanks and a wrench given with each saw. This list slice applies to No. 3. Chisal Tooth. For prices of saws thinner than listed, see Page 10. The No. 33 Points and Holders combined will fit in the No. 3-1902 sockets, but a No. 33 Point will not work in conjunction with No. 3-1902 Holder, nor will a No. 37 Holder work in conjunction with No. 37 Point.

### CHISEL TOOTH, No. 44




The following list gives the number of teeth in the Standard No. 44 Chisel Tooth Saw. . 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66 in. 16, 18, 20, 22, 24, 24, 28, 28, 32, 32, 34, 34, 34, 36, 36, 40, 40, 44, 44, 48, 48, 52, 52, 56, 56 This List also applies to No. 4 Chisel Tooth. For prices, see page 12

The No. 44 Points and Holders combined will fit the No. 4-1902 sockets, but a No. 44 Point will not work in conjunction with a No. 4-1902 Holder, nor will a No. 44 Holder work in conjunction with a No. 4 Point.

With each Chisel Tooth Saw, whether new or altered from a Solid Tooth, we include a Wrench,

and extra Points and Holders in accordance with the List of extras on page 12.



This wrench, as will be noted, is made without the "boss," or projecting point, thus there is nothing in the way of placing the tooth or bit in position, and owing to the lines of Nos. 33 and 44 bits and holders the insertion is easily and quickly done.

To change teeth stand behind the saw with the wrench in the right hand, having a pan of oil handly disposed to the left. Place the wrench on the holder, press pin through the hole and lift the wrench far enough to remove the old tooth. Oil the socket and groove carefully. To insert new teeth it is merely necessary to place the holder in the socket, adjusting the wrench and then the bit squarely on the "ball" of the holder, as shown in the illustration, and the movement of the wrench towards you causes the holder to draw the bit into position.

Adapted only for the Nos. 33 and 44 bits entered.

All patterns of Chisel Tooth Wrenches, \$1.50 each.

### CHISEL TOOTH, No. 6



Numerous calls have been man. ... consel Tooth Saws with a greater number of teeth than No. 33 permits, which would be adapted to heavy feed mills. The following are prices for No. 6 Tooth, which include one extra set of teeth or bits, two extra holders or shanks and a wrench with each saw.

For price of duplicate Points and Holders, see page

Greatest Number

Diam. Inches	Thickness Gauge	Standard No. of Teeth	of Teeth that can be put in No. 6 Saw	Si I	ze of Iole	Price Each	Extra for Each Gauge Heavier	(G) Be Sa	indi relin	ew Saws ng or g Old (xtra)
10	12	10	10	1	inch	\$27.00	\$0.20	\$0.45	per	gauge
12	11	12	12	1	**	32.00	.30	.55	• ••	**-
14	10	14	14	11	**	37.00	.40	.65	"	"
16	10	16	16	11	**	43.00	.50	.75	"	**
18	10	18	20	11	**	49.00	.60	.90	"	**
20	9	20	22	1 16	**	55.00	.75	1.05	**	**
22	9	22	24	1.5	**	61.00	.90	1.20	**	**
24	9	24	26	11	**	68.00	1.05	1.35	••	**
26	9	26	28	1 3	**	75.00	1.25	1.55	**	**
28	9	28	30	11	**	82.00	1.50	1.75	**	
30	9	30	32	14	**	90.00	1.75	1.95	"	"
32	8	32	34	11	**	100.00	2.00	2.15	"	**
34	8	36	36	1 🖁	**	110.00	2.25	2.35	**	**
36	8	38	38	12		120.00	2.60	2.55	**	**
38	8	40	42	1 }	**	130.00	3.00	2.75	**	**
40	8	42	44	2°	**	140.00	3.40	2.95	**	**
42	8	44	<b>4</b> 6	2	44	150.00	3.80	3.25	**	" _
44	- 8	46	50	2	"	165.00	4.40	3.55	-"	
46	8	48	52	2	**	180.00	5.15	3.85	"	ie
48	8	50	54	2	**	200.00	5.90	4.15	**	**
50	8	52	56	2	**	220.00	6.65	4.45	"	**_
52	7	56	60	2	**	245.00	7.40	4.80		
54	7	58	62	2	**	275.00	8.80	5.15	**	
56	7	60	64	2	44	310.00	10.25	5.50	**	**
58	7	62	66	2	**	340.00	11.75	5.95	"	**
60	7	64	70	2	**	375.00	13.25	6.40	**	
62	6	66	74	2	**	420.00	14.75	6.85	**	**
64	ŏ	68	76	2	**	470.00	17.60	7.35	**	**
66	6	72	78	2	**	520.00	22.00	7.85	**	"
68	6	76	80	2		575.00	26.40	8.45	**	
70	6	78	82	2	**	630.00	30.80	9.05	**	
72	ĕ	80	84	2	**	685.00	35.20	9.65	**	"

Always give number of the saw when ordering duplicate teeth and holders

### SAW REPAIRING

When your saws need repairs send them to us and get the benefit of our 83years saw-making experience. Our expert workmen will know just what is needed, and put your saws in proper condition. We have complete saw-repairing equipment, and our work can always be depended upon.

To insure prompt and accurate service it is necessary, however, that definite instructions be given with each repair order. For this purpose there was formulated

the following

# INSTRUCTIONS FOR ORDERING REPAIRS ON INSERTED TOOTH SAWS

First—The Saw should be plainly addressed to HENRY DISSTON & SONS, INC., TACONY STATION, PHILADELPHIA, PA.

Secondly—The sender's name and address should be written plainly on the case for the purpose of identification. Then give following data

(Blanks furnished for the purpose) Please repair the saw described in the following: Diameter Shop number Shop number Number of teeth Size of teeth Hammer, right hand; left hand Speed running empty....; At work.... Greatest feed in inches per revolution Mandrel runs Hot, Warm, or Cold Timber to be sawed..... Special instructions Fit saw with new Holders new Points Ship to..... Shipping Address County State State Ship by freight or Express SIGNATURE..... Post Office Address....

It is necessary to send the old saw complete with all the Points and Holders unless you wish new Points and Holders inserted. We cannot properly adjust the tension of an Inserted Tooth Saw without having a full set in place.

Please do not guess at the speed. Give accurate information on this point. Shipping cards supplied on application.

Digitized by Google

### HENRY DISSTON & SONS



### RIFT SAWS

WITH No. 33 or No. 6 CHISEL TRETH

When ordering, send templet of holes and state number of saws used in a set. With each saw we furnish, without extra charge, one set of extra points, two extra holders and a wrench.

Duplicate Teeth, No. 33 or No. 6 pattern, \$5.00 per hundred net.

Duplicate Holders, No. 33 or No. 6 pattern, 44 cents each net.

These saws are regularly made 8 gauge, but can be furnished 9 or 10 gauge at the same advance as for standard Inserted Tooth Saws.

Diameter 14 inches 16 " 18 "	Gauge 8 8 8	4 Teeth \$22.00 25.00 28.00	6 Teeth \$27.00 30.00 33.00	10 Teeth 
20 "	8	31.00	36.00	\$44.00
22 "	8	34.00	39.00	47.00
24 "	8	38.00	43.00	51.00
26 "	8	43.00	48.00	56.00
28 "	8	48.00	53.00	61.00
30 "	8	53.00	58.00	66.00





### GROOVING SAWS

With No. 41/2 Chisel Tooth

Diameter			
6 inches	4 Teeth	7 Gauge	\$13.00 each
7 ""	5 "	7 ""	16.00 "
g	6 "	7 "	19.00 "
ŏ "	6 "	7 "	21.00 "
10 "	ě "	7 "	25.00 "
12 "	10 "	7 "	29.00 "
14 "	iŏ "	<del>,</del> "	33.00 "
16 "	12 "	<del>,</del>	38.00 "
18 "	14 "	7 "	43.00 "


No extra points or holders included
Cutting Edge One Wrench with each Saw
Extra Points and Holders

1. It or 1 inch 12 or 1 inch 12 or 1 inch 14 or 1 inch Holders 37.50 per 100 315.00 per 100 117.50 per 100 220.00 per 100 40.67 each

Always give number of the saw when ordering duplicate teeth and holders

Digitized by Google

### INSERTED TOOTH, No. 16



The No. 16 pattern tooth is designed for thin saws and principally used for resaws or for making thin boards from timber.

Dia	meter	No. of Teeth	Gauge at Centre	Gauge at Rim	Price Each
16 i	nches	24	10	16	\$38.50
18	"	28	10	16	43.50
20	"	30	10	16	48.50
22	"	32	9	16	54.00
24	44	34	9	16	58.00
26	"	36	8	16	65.00
28	"	38	8	15	69.00
30	"	40	8	15	73.00
32	"	40	8	15	76.00
34	"	42	7	14	82.00
36	"	44	7	14	88.00
38	"	44	7 .	14	93.00
40	"	48	6	13	105.00
42	"	48	6	13	109.00
44	"	52	5	13	130.00
44 46	"	52	5	13	140 00
48	"	54	5	13	154.00

Extra for each additional tooth inserted, \$1.20.

Extra teeth with rivets, 20 cents each.

This pattern of tooth can be inserted in Segment Saws. Add \$1.20 per tooth the list price of Segments on page 31.

to the list price of Segments on page 31.

Resaws are made with the bevel equally divided; those for sawing thin boards from timber are made with a flat side which must be specified on order.

See directions for ordering Segment Saws, page 31.

Always give number of the saw when ordering duplicate teeth

### AMERICAN SAW CO. PATTERNS HENRY DISSTON & SONS, Inc., MANUFACTURERS

### GOULDING BIT, No. 1



	TREN	TON, N	0. 1		BROOM	KE BIT, N	No. 1	GOULI	DING BIT, No.	1
Diar	neter	Thick	eness	No of Teeth	Size o	f Hole	Price Each	Extra for Each Gauge Heavier	Beveling Saws (Grindin eling Old Saw	g or Bev-
20 i	nches	10 c	gauge	12	1.5	inches	\$50.00	80.75	\$1.05 pe	r gauge
22	11	10	"	12	1 36	11	56.00	.90	1.20	" Bunge
24	44	10	44	14	13	**	62.00	1.05	1.35	54
26	44	10	46.2	14	13	**	68.00	1.25	1.55	**
28	11	10	**	16	11/2	**	74,00	1.50-	1.75	14
30	"	10	44	20	11	44	80.00	1.75	1.95	64
32	44	9	**	20	1.5	44	88.00	2.00	2.15	**
34	**	9	44	22	1 8	61	97.00	2.25	2.35	44
36	**	8	**	24	15	"	106.00	2.60	2.55	44
38	**	8	44	24	1 5	**	115.00	3.00	2.75	64
40	4.6	8	44	25	2	44	125.00	3.40	2.95	44
42	**	8	**	28	2	44	137.00	3.80	3.25	66
44	11	7	**	28	2		150.00	4.40	3.55	**
46	44	7	**	30	2	44	165.00	5.15	3.85	44
48	44	7	**	32	2	44	180.00	5.90	4.15	64
50	**	7	41	32	2	44	200.00	6.65	4.45	60
52	**	6	44	34	2	66	220.00	7.40	4.80	64
54	4.6	6	44	34	2	**	250.00	8.80	5.15	44
56	14	6	**	36	2	44	280.00	10.25	5.50	**
58	**	6	**	38	2	66	310.00	11.75	5.95	44
60	11	5	**	42	2	**	340.00	13.25	6.40	44
62	6.6	5		44	2	44	380.00	14.75	6.85	**
64	66	5	**	46	2	**	425.00	17.60	7.35	44
66	**	5		48	2	16	470.00	22.00	7.85	44
68	**	5	**	50	2	- 11	520.00	26.40	8.45	**
70	**	4	44	52	2	44	570.00	30.80	9.05	**
72	44	4	4.6	54	2	- 6.6	620.00	35.20	9.65	**

With each Goulding or Brooke Bit Saw we include, without extra charge, one extra set of bits, we extra springs and a wrench.

Always give number of the saw when ordering duplicate teeth and holders

### AMERICAN SAW CO. PATTERNS HENRY DISSTON & SONS, Inc., MANUFACTURERS



TRE	INTON. I	No. 2	R	ISDON, No.	. 2	GO	ULDING BI	T. No. 2	HIGH-SPEEL	No. 2
Ďis	meter	Thi	ckness	No. of Teeth	Size	of Hole	Price Each	Extra for Each Gauge Heavier	Beveling Saws (Grindi eling Old Sa	ng or Bev
12 i	nches	11 6	gauge	10	1	inch	832.00	80.30	80.55pe	r gauge
14	44	11	"	12	11	44	37.00	.40	.65	"
16	44	11	**	14	11	**	43.00	.50	.75	44
18	**	11	**	16	11	**	49.00	.60	.90	44
20	- 61	10	11	18	15	***	55.00	.75	1.05	66
22	**	10	44	20	13	11	61.00	.90	1.20	64
24	**	10	**	22	13	**	68.00	1:05	1.35	4.6
26	44	9	44	24	13	**	75.00	1.25	1.55	**
28	**	9	64	26	11	44	82.00	1.50	1.75	44
30	**	9	44	28	11	44	90.00	1.75	1.95	44
32	44	8	**	28	15	44	100.00	2.00	2.15	44
34	**	8	**	30	15	**	110.00	2.25	2.35	**
36	- 44	8	**	32	19	**	120.00	2.60	2.55	44
38	44	8	44	34	15	44	130.00	3.00	2.75	**
10	**	7	**	34	2°	64	140.00	3.40	2.95	44
12	**	7	61	36	2	**	150.00	3.80	3.25	44
44	**	7	**	38	2	**	165.00	4.40	3.55	**
46	**	7	44	40	2	**	180.00	5.15	3.85	44
48	**	7	44	42	2	**	200.00	5.90	4.15	41
50	**	6	**	44	2	**	220.00	6.65	4.45	**
52	**	6	**	46	2	4.5	245.00	7.40	4.80	**
54	*	6	**	48	2	44	275.00	8.80	5.15	64
56	**	6	**	50	2	44	310.00	10.25	5.50	44
58	**	5	"	52	2	**	340.00	11.75	5.95	44
50	**	5	66 ?	54	2	44	375.00	13.25	6.40	44
52	**	5	**	56	2	**	420.00	14.75	6.85	66
54	"	5	**	58	2	**	470.00	17.60	7.35	44
56	"	4	**	. 60	2	**	520.00	22.00	7.85	44
58	"	4	**	62	2	66	575.00	26.40	8.45	44
70	"	4		64	2	.44	630.00	30.80	9.05	44
72	44	4	46	66	3	44	695.00	35.20	0.65	**


With each Goulding Bit Saw we include without extra charge one extra set of teeth or bits, two extra holders or shanks and a wrench.


Always give number of the saw when ordering duplicate teeth and holders

AMERICAN SAW CO. PATTERNS OF INSERTED TEETH
HENRY DISSTON & SONS, Inc., MANUFACTURERS

### TRENTON TOOTH

1894 STYLE





Either Style can be Used in the Same Saw For prices see pages 18, 19 and 21

Inserting either Trenton, Brooke Bit, High-Speed, Risdon or Goulding Bit pattern of teeth in old circular saws reduces the diameter from two to four inches. The list price is figured at the reduced diameter from the List of Solid-Tooth Circular Saws (page 26), taking one-half the list price and adding thereto \$2.00 for each tooth inserted of No. 1 or No. 2 pattern

Always give number of the saw when ordering duplicate teeth

### AMERICAN SAW CO. PATTERNS OF INSERTED TEETH HENRY DISSTON & SONS, Inc., MANUFACTURERS

### PRICE LIST OF TEETH

No. 1.	American, long or short points	50	cents ead	ch
" <b>2</b> .	" solid points	50	" "	"
" 3.	. " "		u' i	"
" 1.	Trenton, long "		" "	• •
" 1.	" short "	36	"	"
. 2.	" long "		"	"
" 2.				"
" 2.	Risdon		".	"
" 2.	Dunbar	28	" "	
" 1.	Prosser	36	"	
·· 2.	"	28	"	"
" 2.	High-Speed	28	"	"
<b>" 1.</b>	Brooke Bit	10	"	"
" 1.	" Spring or Holder	50	"	"
" 1.	Goulding Bit	7	"	"
" 2.	" "		"	"
" 1.	" Spring or Holder	50	"	"
" 2.		40	"	"

Always give number of the saw when ordering duplicate teeth and holders

### MACHINE FOR SHARPENING POINTS

FOR INSERTED TOOTH CIRCULAR SAWS



Emery wheel, 4-inch diameter, 1-inch face. Pulley, 2-inch diameter, 1\frac{1}{2}-inch face.

### INSERTED TOOTH

CIRCULAR CROSS-CUT SAWS





This style of saw is particularly adapted for use in pulp, paper, shingle and stave mills, also for slab and slasher saws, here logs or cants are cut into short lengths or bolts. Thorough tests covering a trial for some years, of both two and rong parterns, have demonstrated them to be a decided success. The tech are high in temper, thus giving superior In style of saw is particularly adapted for use in punp, puper, anima.

An other logs or cants are cut into short length or boils. Thought ests to overing a trial for some years, of both two and four-promp parterns, have demonstrated them to be a decided success. The teeth are high in temper, thus giving superior edge-holding quide in the property of the property

### SAWS—COMPLETE


Dia	meter	Thi	ckness	Number of Tooth Sections Either Two or Four-Prong	Si	ze of Hole	Price Each	Extra for Each Gauge Heavier	Bevelin Saws (Grind eling Old S	ng or Bev
36 i	nches	8 8	gauge	24	15 1	nches	\$101.00	\$2.60	\$2.55 p	er gauge
38	44	8	**	- 24	15	**	109.00	3.00	2.75	"
40	4.4	. 8	44	26	2	44	118.00	3.40	2.95	**
42	44	8	44	28	2	44	129.00	3.80	3.25	**
44		7		30	2	41	140.00	4.40	3.55	**
46	**	7	44	30	2	44	152.00	5.15	3.85	**
48	**	7	**	32	2	44	165.00	5.90	4.15	**
50	44	7	**	34	2	**	185.00	6.65	4.45	**
52	**	6	**	36	2	44	217.00	7.40	4.80	**
54	**	6	**	38	2	16	242.00	8.80	5.15	**
56	**	6	**	40	2	44	264.00	10.25	5.50	44
58	11	6	**	42	2	**	293.00	11.75	5.95	44
60	**	5		42	2	"	323.00	13.25	6.40	44
62		5	44	44	2	6.6	360.00	14.75	6.85	44
64	**	5	44	44	2	**	403.00	17.60	7.35	44
66	**	5	**	48	2	"	440.00	22.00	7.85	44
68	A to	5	**	48	2	**	476.00	26.40	8.45	44
70	**	5	**	52	2	**	520.00	30.80	9.05	44
72	4.5	5	**	52	2	41	572.00	35.20	9.65	44
74	61	5	**	54	2		630.00			
76	**	4	**	54	2 -	**	704.00			
78	**	4	**	56	2	**	836.00			
80	4.0	4	44	56	2	44	968.00			
82	**	4	44	58	2	44	1100.00			
84	44	4	61	50	2	44	1232 00			

No extra teeth included in above prices

EXTRA TEETH

.......90 cents each Four-Prong..... .\$1.00 each

### SPIRAL TOOTH CIRCULAR CUT-OFF SAW



A rapid, smooth cutting, easy running saw. Superior to any other form of Cut-off saw of Inserted Tooth type.

The teeth are inserted in the blade on spiral lines, which give full clearance to each individual tooth and also perfect clearance to the blade in the largest cuts.

The manner in which the teeth are inserted in the blade does away with the necessity of setting

The manner in which the teeth are inserted in the biade does away with the increasing of springing the teeth for clearance.

The only operation for keeping the saw in running order is to sharpen the teeth, which is readily accomplished through the use of any of the standard automatic cut-off saw sharpeners of the proper size. We recommend and guarantee the Spiral Tooth to give economical and satisfactory service in all kinds of cut-off work on large timber and logs, and particularly where the greatest capacity is required, such as cutting logs into pulp-wood length, stave bolts and shingle blocks.


This type of saw is intended for cutting heavy stock, and is not recommended in small diameters and thin sauges, and therefore is not practical for trimming or equalizing lumber or small timbers.

Diam. nches	Thickness Gauge	Width of Tooth			Standard No. Teeth	Price Each	Diam.	Thickness Gauge	Width of Tooth		Size Hole	Standard No. Teeth	Pric Eacl
36	9 ga.	∄ in.	11	in.	62	\$110.00	68	o ga.	l in.	2	in.	124	\$520.0
38	9 ""	ļ	ΙĬ	**	66	118.00	70	5 ""	j	2	**	128	565.0
40	9 "	ļ "	2	**	70	127.00	72	5 "	j "	2	"	132	610.0
42	8 "	į "	2	"	74	139.00	74	5 "	į "	2	**	136	675.0
44	8 "	1 "	2	"	78	153.00	76	5 "	1 "	2	**	140	765.0
46	8 "	₫ "	2	44	82	167.00	78	5 "	į "	2	**	144	890.0
48	8 "	<b>į</b> "	2	"	86	182.00	80	5 "	<i>} "</i>	2	**	148	1030.0
50	7 "	Į "	2	**	90	204.00	82	5 "	į "	2	**	152	1170.
52	7 "	1 "	2	"	94	232.00	84	5 "	1 "	2	**	156	1310.
54	7 "	į "	2	**	96	262.00	86	4 "	į "	2	"	160	1470.
56	7 "	<b>į</b> "	2	**	100	290.00	88	4 "	j "	2	"	164	1650.
58	7 "	į "	2	"	104	320.00	90	4 "	Į "	2	"	168	1840.
60	6 "	1 "	2	**	108	350.00	92	4 "	1 "	2	**	172	2040.
62	6 "	į "	2	**	112	390.00	94	4 "	į "	2	"	174	2280.0
64	6 "	Į "	2	"	116	430.00	96	4 "	į "	2	**	178	2550.0
66	6 "	į	2	**	120	475.00			•				

sincluded in the above prices. Saws of odd diameters take price of next larger size. For each too standard, add too last price, \$1.65. No extra charge for saws one gauge thicker than list. If more the nextra charge will be made for each additional gauge the same as on solid tooth circular saws. It saws into Inserted tooth cut-off, charge is \$1.65 per tooth, plus one-half the list price of a solid tooth a more is based on the size the saw will finish after cutting, down, and is subject to the same discount

### DIAMOND-POINT INSERTED TOOTH

CIRCULAR ICE SAW



This is an improvement on the regular square-bit chisel tooth which has stood the test of time in so many plate and natural ice harvesting plants for many years.

It will be noted that the teeth in this new saw are diamond-point in shape, which, through a shearing cut, causes the saw to run materially lighter than those fitted with the square bits.

The shearing action of this form of tooth is equal on both sides from the center of the saw, thus avoiding lateral strains and the possibility thereby of the saw leaving its true line.


The diamond-shaped point, through making a pronounced  $\bigvee$  in the bottom of the groove, centers the cleavage point, and therefore allows the floats and cakes to be barred-off with materially less flanging than is possible when the bottom of the groove is flat or square.

We are prepared to supply square-pointed teeth for this saw, these being interchangeable with the diamond-point teeth, so that the same saw is adapted for the use of either square or diamond-point teeth at the option of the operator.

We recommend this saw to give economical and satisfactory service.

PRICES ON APPLICATION

### **GULLET TOOTH CIRCULAR SAW**

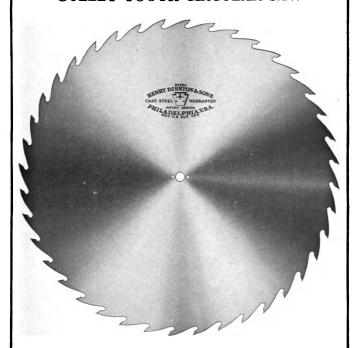

Our experience of over Eighty-three years in Saw-Making has given us a thorough knowledge of the requirements of all classes of Saws, and through this knowledge, together with the possession of unequaled facilities, we have reached a state of perfection in material and workmanship justifying our claim that DISSTON SAWS are superior in every respect to all others.

It is our determination to maintain the high reputation acnieved for the quality and efficiency of our goods, which has been established for so many years.

EVERY SAW BEARING THE BRAND OF HENRY DISSTON & SONS IS FULLY WARRANTED

### SOLID TOOTH CIRCULAR SAWS

### EXTRA QUALITY

### PATENT GROUND AND TEMPERED

### SUPERIOR WORKMANSHIP GUARANTEED AS PER WARRANTY

Diam- eter Boches	Thick- ness Gauge	Size of Hole Inch	Price Each	Extra for Each Gauge Heavier	New S	Beve	(Grind- ling Old xtra)
6	18	3 4	\$3.30	\$0.07	\$0.25	per	gauge
- 8	18	1	4.40	.10	.35	**	"
10	16	ĭ	5.60	.20	.45	**	44
12	15	1	7.00	.30	.55	**	**
14	14	11	8.50	.40	.65	**	"
16	14	11	10.50	.50	.75	"	44
18	13	14	12.50	.60	.90	44	**
20	13	1 5 16	15.00	.75	1.05	**	**
- 22	12	1 5 16	17.50	.90	1.20	"	**
24	11	13	20.50	1.05	1.35	**	**
26	11	13	24.00	1.25	1.55	**	**
28	10	11/2	28.00	1.50	1.75	**	**
30	10	11/2	32.00	1.75	1.95	**	11
32	10	15	36.50	2.00	2.15	44	**
34	9.	1 5	41.00	2.25	2.35	**	44
36	9	18	47.00	2.60	2.55	**	44
38	9	15	54.00	3.00	2.75	44	46
40	9	2	62.00	3.40	2.95	**	44
42	8	2 2	71.00	3.80	3.25	**	**
44	8	- 2	83.00	4.40	3.55	**	**
46	8	2 2	98.00	5.15	3.85	"	**
48	8	2	112.00	5.90	4.15	44	**
50	7	2 2	127.00	6.65	4.45	"	**
52	7	2	142.00	7.40	4.80	"	44
54	7	2	157.00	8.80	5.15	**	"
56	7	2	180.00	10.25	5.50	**	**
58	7	2 2 2	200.00	11.75	5.95	"	**
60	6 -	2	224.00	13.25	6.40	"	"
62	6	2	250.00	14.75	6.85	**	**
64	6	2	280.00	17.60	7.35	**	**
66	6	2	310.00	22.00	7.85	"	**
68	5	2	350.00	26.40	8.45	"	**
70	5	2	400.00	30.80	9.05	44	44
72	5	2	450.00	35.20	9.65	66	**
74	5	2 2 2	510.00	39.60	10.30	**	***
76	5	2	575.00	44.00	11.00	**	**
78	-5	2	690.00	49.85	11.85	44	- 66
80		2	810.00	55.75	12.90	**	**
82	5 5 5	2 2	940.00	63.05	14.10	**	44
84	5	2	1075.00	70.40	15.40	44	44

All saws filed and set, ready for use.

All saws under 6 inches in diameter take the list of a 6-inch saw.

All saws of odd diameters take the list of next larger saw.

No extra charge for saws one gauge thicker than list. No extra charge for saws one to three gauges thinner than list; when more than three gauges thinner than list, add 5 per cent. for each gauge.

Saws 48 inches and under, and 62 inches and over, in diameter, more than two gauges thinner than list, not warranted. Saws 50 inches to 60 inches in diameter thinner than 10 gauge, not warranted. Saws 42 inches or less in diameter beveled one gauge without extra charge; 44 inches or larger beveled two gauges without extra charge.

Saws, hollow or concave ground add for each additional gauge hollow or concave ground double the list for beveling.

Saws for cutting bone, horn and ivory, add 50 per cent to the above list. When these saws are how or bevel ground, the 50 per cent: advance is to apply only on the list price-of a straight gauge saw, and not to apply on the extras for hollow or bevel grinding.

### RESAWING OR SIDING SAWS

Diameter		Price	Diameter		Price
Inches	Gauge	Each	Inches	Gauge	Each
16	13 x 17	\$12.75	28	9 x 13	<b>\$33.2</b> 5
16	12 x 16	13 25	28	9 x 14	35.00
16	11 x 15	13.75	28	8 x 13	36.50
18	12 x 16	15.20	30	9 x 13	37.85
18	11 x 15	15.80	30	9 x 14	39.80
18	12 x 17	16.10	30	8 x 13	41.55
20	12 x 16	18.15	32	9 x 13	42.95
30	11 x 15	18.90	32	9 x 14	45.10
20	12 x 17	19.20	32	8 x 13	47.10
22	11 x 15	21.10	34	9 x 13	48.05
22	10 x 14	22.00	3 <b>4</b>	8 x 13	<b>50.4</b> 0
22	11 x 16	22.30	3 <b>4</b>	8 x 14	52.70
24	10 x 14	24.55	36	8 x 13	57.20
24	9 x 13	25.60	36	8 x 14	59.75
24	10 x 15	25.90	36	7 x 14	64.90
26	10 x 14	28.65	38	8 x 12	62.25
26	9 x 13	29.90	38	8 x 13	65.00
26	10 x 15	30.20	38	7 x 13	70.75

To figure sizes and thicknesses not listed take solid tooth circular saw list, allow one gauge thicker than standard then add for each additional gauge heavier—per list for gauges heavy on page 26.

### EDGER SAWS

### SOLID TOOTH

			8	9	10	11	12 Gauge
12	inches d	iameter	 \$8.80	\$8.50	\$8.20	\$7.90	\$7.60 each
14	"	44	 10.50	10.10	9.70	9.30	8.90 "
16	44	**	 13 00	12.50	12.00	11.50	11.00 "
18	"	"	 14.90	14.30	13.70	13 10	12.50 "
20	44	44	 18.00	17.25	16.50	15.75	15.00 "
22	"	"	 20.20	19.30	18.40	17.50	17.50 "
24	**	**	 22.60	21.55	20.50	20.50	20.50 "

To figure sizes and thicknesses not listed take solid tooth circular saw list, allow one gauge thicker than standard then add for each additional gauge heavier—per list for gauges heavy on Page 26.

### LATHE SAWS

Diameter Inches	Gauge	Price Each	Extra For Each Additional Gauge Heavier	Diameter Inches	Gauge	Price Each	Extra For Each Additional Gauge Heavier
8	9	\$3.40	\$0.20	13	6	\$5.40	<b>\$0</b> .35
9	8	3.60	.20	14	6	6.00	.35
10	7	4.00	.25	15	5	6.60	. <b>4</b> 0
11	7	4.40	.30	16	5	7.40	.40
12	6	4.80	.30				

All Lathe Saws under 8-inch diameter, take price of 8-inch saw.

### REPAIRING CIRCULAR SAWS

Diam. Inches	Hammering	Gumming and Hammering	Cutting down Retoothing and Hammering	First Gauge Grinding	After the First	Setting and Sharpening Cut-off Saws	Setting and Sharpening Rip Saws
6	\$0.45	<b>\$0</b> .55	\$0.75	\$0.65	\$0.35	80.45	<b>\$</b> 0.35
8	.55	. 75	1.00	.85	.55	.55	.40
10	. 75	1.00	1.30	1.05	. 75	.65	. 50
12	.90	1.35	1.60	1.15	.85	. 75	.60
14	1.05	1.60	1.90	1.35	1.00	.85	.70
16	1.20	1.80	2.20	1.60	1.15	.95	.80
18	1.45	2.10	2.55	1.95	1.30	1.05	.90
20	1.65	2.50	2.95	2.20	1.45	1.15	1.00
22	1.90	2.85	3.30	2.40	1.60	1.30	1.10
24	2.10	3.25	3.70	2.70	1.75	1.45	1.20
26	2.40	3.70	4.20	3.00	1.90	1.60	1.30
28	2.70	4.15	4.75	3.40	2.05	1.75	1.40
30	3.00	4.60	5.35	3.75	2.20	1.95	1.50
32	3.30	5.05	6.00	4.15	2.35	2.15	1.60
3 <b>4</b>	3.70	5.55	6.90	4.50	2.55	2.35	1.75
36	4.30	6.15	7.80	4.90	2.80	2.55	1.90
38	4.80	7.00	9.00	5.25	3.00	2.75	2.05
40	5.55	8.05	10.00	5.65	3.30	2.95	2.20
42	6.30	9.15	11.55	6.00	3.60	3.15	2.35
44	7.05	10.35	13.05	6.45	4.05	3.35	2.50
46	7.95	11.80	14.70	7.00	4.50	3.60	2.65
48	8.85	13.20	16.50	7.60	4.95	3.80	2.85
50	9.75	14.65	18.40	8.25	5. <del>4</del> 0	4.10	3.05
52	10.65	16.05	20.25	9.00	5.95	4.40	3.25
54	11.55	17.55	22.15	9.90	6.30	4.70	3.50
56	12.45	19.05	24.00	10.90	6.75	5.00	3.75
58	13.50	20.70	25.90	12.00	7.20	5.30	4.00
60	14.70	22.50	27.75	13.20	7.75	5.60	4.25
62	15.90	24.30	30.40	14.40	8.25	6.00	4.50
64	17.10	26.10	33.00	15.60	8.85	6.30	4.75
66	18.30	27.90	35.65	16.80	9.45	6.60	5.00
68	19.50	29.70	38.25	18.00	10.15	6.90	5.25
70	20.50	31.50	40.90	19.50	11.05	7.20	5.50
72	21.90	33.30	43.50	21.00	12.00	7.50	5.75
74	23.10	35.10	46.15	22.50	13.15	7.80	6.00

Saws smaller than 6 inches take 6-inch price.

Saws of odd diameter, take the price of next larger size.

When saw is ground add price of hammering to price of grinding. Gumming and retoothing prices cover sizes of saws after they have been repaired. All breakages at risk of owner.

Burned Sawa. We repair burned saws at two-thirds price of new ones, which includes retempering, grinding, hammering polithing, etc.

polishing, etc.

Changing Solid Saws to Inserted Tooth Saws. For changing solid saws into inserted tooth saws, \$2.00 per tooth plus one-half the list price of solid tooth saws of same size, this price being based on size the saw will cut to and subject to same discount is inserted tooth saws. Same extra furnished as with a new saw.

Changing Solld Saws into Inserted Tooth Cut-off Saws, charge is \$1.65 per tooth plus one-half the list price of a Solid Tooth Saw of same size. The price is based on the size the saw will finish after cutting down and is subject to the same discount as Inserted Tooth Cut-off Saws.

Repairing Burned Inserted Tooth Saws, two-thirds the price of a new Solid Tooth Saw of the same diameter, plus 30 cents per tooth. Add for any points and shanks inserted at regular prices. No extras furnished.

Shingle and other thin bevel saws generally will not permit being retempered.

Owner's name should appear on each package or board to insure identification at the factory; Ship to Tacony, Philadelphia, Pa.

### SHINGLE AND HEADING SAWS

WARRANTED EXTRA CRUCIBLE STEEL
Tapered and Patent Ground



TRICES FOR SAWS UNLI	(WILLIOUL COLLETS)	
Price Each	Diameter	Price Each
\$62 . 00	50 inches	\$170.00
	52 "	200.00
80.00	54 "	230.00
95.00	56 "	260.00
110.00	58 "	

 44 "
 110.00

 46 "
 125.00

 48 "
 145.00

inches.....

38

Above list is for caws beveled not more than 8 gauges, and with thickness at centre of same gauge, as shown in Solid Tooth Circular Saw List for saws of same diameter, though one gauge thicker is allowed without extra charge.

For extra thickness or beveling, add for each gauge thicker or gauge beveling as per Solid Tooth Circular Saw List.

All Disston Shingle Saws and Heading Saws are of an extra fine grade of steel, made expressly for the uptroes; unexcelled for toughness, temper and cutting qualities.

New Collars or Flanges for Perkins, Challoner, Trevor or other machines fitted to new saws,

### REPAIRING TAPER GROUND SHINGLE, HEADING AND RE-SAWS

	Size inches, 46 and under	48 and over
Hammeredper inch in diameter	r .20	.25
Gummed and hammered per inch in diameter		.38
Re-toothed and hammeredper inch in diameter		.50
Grinding first gaugeper inch in diamete		.10
Grinding additional gauges per inch in diamete	r .05	.08
For Collars, see page 30		

.....320.00

### SHINGLE AND HEADING SAWS



AT OR COUNTERSUNK



When ordering Shingle Saws give full specifications, as follows: Diameter of saw, in inches. Thickness or gauge at centre. Thickness or gauge at rim. Number of teeth. Right- or Left-hand. Speed of saw.

If we are to furnish the Flange, state size, and maker's name of machine, or send correct and full templet of old flange, giving size and location of holes.

If we are to furnish the saw only, send the flange to us that we may fit it to the saw. If you cannot forward the flange, send templet of holes and sample of screw by which to drill and countersink saw.

### FIG. 1

### SCREWS FOR SHINGLE SAWS

Particular attention is called to the importance of using screws that are suitable to the thickness of the saw; we frequently receive screws as samples by which to drill and countersink, that have heads entirely too large for the thickness of saw, and which require the flange to be countersunk (as shown in Fig. 1), thereby reducing the length of thread in flange, making it impossible to bind the saw firmly to flange.

Fig. 2 shows the correct size the screw-heads should be, thus getting a good bearing for the screw-heads on countersink in saw and the full thickness of flange is retained for thread.

In no case should screw-heads be deeper than thickness of saw. Thin saws require smaller screw-heads than thick saws.



New Flanges for Perkins, Challoner, Trevor or other machines fitted to new saws. Price on application.

### STEEL FLANGES

8 to 26 inches diameter, 3/8 inch thick or less, screwed or riveted to saws. Price on application.

### VENEERING SAWS IN SEGMENTS





When ordering segments, give gauge or thickness at butt and at tooth-edge, depth of bevel, diameter of saw that segments are to form, number of segments in saw, depth of segments, number of teeth in each segment, sample of screw by which to drill and countersink flat or countersunk side, and direction in which teeth run. (See cut.)

In ordering for a flange that has been drilled, send a sheet iron or tin templet or a correct tracing, showing holes and other particulars; or one of the old segments, giving the depth they were originally.

							٠,	Veneer Saws 9 Ga. and Thinner	Resaws 18 Ga, and Thicker
12 in.	deep,	No.	5	gauge,	per foot is	n diameter	of saw,	\$29.00	\$25.00
12 "	"	"	6	**	"	"	"	28.00	24.00
12 "	"	"	7	"	44	"	"	27.00	23.00
12 "	"	"	8	"	"	**	"	26.00	22.00
12 "	"	"	9	"	"	"	44	25.00	21.00
12 "	"	"	10	**	"	"	"	24.00	20.00

Add 5% for each additional inch in depth. Deduct 5% for each inch under 12 inches in depth.

### RATES FOR REPAIRING SEGMENT SAWS

Grinding first and second gauge,	\$1.25 per foot in diameter.				
" each additional "	.25	"	"		
Hammering,			**		
Retoothing and hammering	4.25	**	"		

When sending saws for repairs, always mark case plainly with Name and Address of owner, for purpos of identification; ship to Tacony, Philadelphia, U. S. A.



# CIRCULAR MITRE SAWS

These saws are ground to run without set; especially adapted for smooth cutting, such as Cabinet and Cigar box work.

When ordering, give size of centre hole, also diameter of collars on mandrel.

Hollow Ground for Clearance

	Size inches	Gauge at Hole 17 16	Gauge at Edge of Collar 20 19 18	Gauge at Teeth and Hole 17 16 15	Extra for Each Gauge Heavier \$0.07 .10 .20	Extra for each Additional Gauge Hollow Ground \$0.50 .70 .90	Price Each \$5.40 6.80 8.60
12 14 16 18	::	14 13 13 12	17 16 16 15	14 13 13 12	.30 .40 .50 .60	1.10 1.30 1.50 1.80	10.60 12.60 14.80 17.40 20.60
20 22	"	12 11	15 14	12° 11 11	.75 .90 1.05	2.10 2.40 2.70	24.20 28.00

These prices are for saws sharpened, ready for use




### CIRCULAR MITRE SAW

WITH CLEANER TOOTH

This style of saw can be made for either ripping or cross-cutting. When made for ripping a greater number of cleaner teeth are put in than for cross-cutting. It will cut equally as smooth in either ripping or cross-cutting.

List price same as above

### DISSTON SONS HENRY &

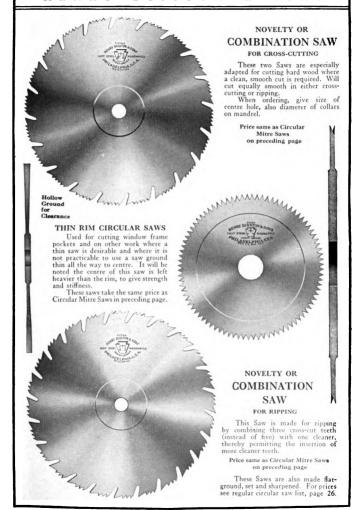

ground, set and sharpened. For prices see regular circular saw list, page 26.

### WABBLE SAWS

Prices on application

### SPECIAL GROOVING SAWS



We manufacture Grooving Saws of various patterns and shapes of teeth, to cut grooves of any width, depth, or special shape on bottom or side.


### **GROOVING SAWS**



Thickr Space of				n≹in. 1 in.	‡ in. 1 in.	16 in. 11 in.	🔒 in. 1½ in.	76 in. 13 in.	⅓ in. 2 in.	🖁 in. 2 in.	🚦 in. 2 in.
Diam	., 4	in.	\$3.60	3.80	6.20	7.00	8.00	8.80	9.60	14.00	14.60
	_5	"	4.20	4.40	7.20	8.00	9.20	10.20	11.20	16.80	17.80
**	6		5.20	5.40	8.20	9.20	10.40	11.60		19.60	21.00
"	7	"	6.00	6.40	9.20	10.40	11.60	13.00	14.40	22.80	23.60
_"	- 8	"	6.80	7.40	10.20	11.60	13.20	14.80	16.40	26.00	27.00
"	9		7.40	8.40	11.40		14.80		18.40	29.20	31.00
"	10		8.20	9.40	12.60		16.40		20.40	33.40	35.00
"	11	"	10.60	11.80	14.00	16.80	18.80	21.00	22.40	36.60	39.00
44	12	"	11.60		15.40	19.20	21.40	23.60	24.80	39.80	43.00
"	14		13.80		17.80	22.20		28.20	29.80	45.00	49.80
"	16	"	15.40	18.40	21.20	26.00	30.60	33.40	35.60	53.00	59.00

For Grooving Saws under 4 inches in diameter take 4 inch list. Bevel Grooving Saws, add 10% to above prices. Grooving Saws with teeth shaped and backed off, add 50% to above prices. Special Grooving Saws made to order, special prices.

# KEYSTONE GROOVER OR DADO HEAD



INSIDE CUTTER

This head consists of two outside saws, each  $\frac{1}{8}$  inch thick, which operated singly will cut groove  $\frac{1}{8}$  inch wide; the two saws placed together will cut groove  $\frac{1}{8}$  inch wide, and with the addition of inside pieces placed between the saws, grooves of any width may be cut from  $\frac{5}{16}$  inch up by sixteenths.

The construction of this head and its adjustment for various widths of grooves is simple, and it is easily kept in order.

Regular sets supplied, as follows:

Set No. 1  2 outside saws, each 1" thick 2 inside pieces, each 1" thick 1 " " 1" " Cuts grooves 1" to 1" inclusive	Set No. 4 2 outside saws, each \$" thick 2 inside pieces, " '\frac{1}{4}" " " \frac{1}{4}" " " \frac{1}{4}" " " \frac{1}{4}" " " \frac{1}{4}" " \frac{1}{4}" " \frac{1}{4}" \fr
2 outside saws, each \( \frac{1}{2} \) thick 2 inside pieces, \( \frac{1}{3} \) " inclusive	Set No. 5 2 outside saws, each \$\frac{1}{2}\$ inside pieces, "\frac{1}{4}\cong "\frac{1}{4}\cong "\frac{1}{2}\cong \frac{1}{2}\cong "\frac{1}{2}\cong \frac{1}{2}\cong \frac{1}{2
Set No. 3 2 outside saws, each ‡" thick 2 inside pieces, " " " " 1 " " " 2 " " 2 " " 2 " " 2 " " 2 " " 1 " inclusive	Set No. 6 2 outside saws, each 4" thick 2 inside pieces, " 16" " 1 " " 5" " 12" " 12" Cuts grooves 1" to 12" inclusive

# KEYSTONE GROOVER OR DADO HEAD

Set No. 7 2 2 outside saws, each ‡" thick 2 inside pieces, " † " " 1 " " " " 6 " " " " " " " Cuts grooves ‡" to 2" inclusive	Set No. 9 2 outside saws, each \( \frac{1}{2} \) inside pieces, "\( \frac{1}{2} \) " " 10 " " \( \frac{1}{2} \)" " Cuts grooves \( \frac{1}{2} \)" to 3" inclusive
Set No. 8 2 outside saws, each 1" thick 2 inside pieces, "1" " 1 " " 1" " 8 " " 1" " Cuts grooves 1" to 2" inclusive	Set No. 10 2 outside saws, each ‡" thick 2 inside pieces, " 1e" " 1 " " 1 1 " " 1 1 " " 1 1 " " 1 1 " " 1 1 " 1 " 1 " 1 " 1 " " 1 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " 1 " " 1

# PRICE LIST KEYSTONE GROOVER

	Diam.	5"	6"	7"	8"	9"	10"	12"	14"	16"	18"
Set No	. 1	\$10.95	12.40	14.10	15.75	17.45	19.55	22.15	25.00	28.55	32.30
Set No	. 2	13.35	15.00	17.00	18.95	20.95	23.35	26.25	29.40	33.45	37.60
Set No	. 3	15.75	17.60	19.90	22.15	24.45	27.15	30.35	33.80	38.35	42.90
Set No	. 4	18.15	20.20	22.80	25.35	27.95	30.95	34.45	38.20	43.25	48.20
Set No	. 5	20.55	22.80	25.70	28.55	31.45	34.75	38.55	42.60	48.15	53.50
Set No	. 6	22.95	25.40	28.60	31.75	34.95	38.55	42.65	47.00	53.05	58.80
Set No	. 7	25.35	28.00	31.50	34.95	38.45	42.35	46.75	51.40	57.95	64.10
Set No	. 8	30.15	33.20	37.30	41.35	45.45	49.95	54.95	60.20	67.75	74.70
Set No	. 9	34.95	38.40	43.10	47.75	52.45	57.55	63.15	69.00	77.55	85.30
Set No	. 10	44.55	48.80	54.70	60.65	66.45	72.75	79.55	86.60	97.15	106.50

# EXTRA OUTSIDE SAWS, EACH %" THICK

5"	6"	7"	8"	9"	10"	12"	14"	16"	18"	Diam.
\$3.00	3.50	4.10	4.70	5.30	6.10	7.15	.8.30	9.80	11.40	Each

#### EXTRA INSIDE PIECES KEYSTONE GROOVER

Thick	5"	6"	7"	8"	9"	10"	12"	14"	16"	18"	Diam.
<b>₩</b> ″	\$1.60	1.75	1.90	2.05	2.20	2.35	2.50	2.65	2.80	2.95	Each
⅓"	1.75	1.90	2.10	2.25	2.45	2.65	2.85	3.10	3.35	3.60	"
<b>¼</b> "	2.40	2.60	2.90	3.20	3.50	3.80	4.10	4.40	4.90	5.30	"

# CONCAVE SAWS

LEFT-HAND

RIGHT-HAND



We respectfully call attention of manufacturers of chair or wheelwright lumber, barrels, etc., to concave saws, which we are manufacturing in large numbers. They are dished and tempered by an entirely new and patented process, and guaranteed to be of superior quality in every respect.

	ameter	Gauge	Size of 1						
6 i	nches,	16	₹ incl	n. \$6.00 ea	ach \$0.10	extra	for each ac	lditional	l gauge.
7	"	15	3 44		. 12	***	44	46	8
8	"	15	1 ···		" .15	"	"	**	44
9	**	15	7 "	8.50	" .20	· "	"	"	**
10	"	14	1 "	9.50	" .29	"	"	44	"
ii	"	14	i "		" .30		44	44	**
12	"	14	1 "	11.60	" .40		"	"	**
14	"	13	11 "	13.50	" .55	; "	"	"	**
16	"	13	11 "	15.50	" .70	) "	44	"	"
18	"	12	īį "		" .85		"	44	"
20	"	12	115 "		" 1.00		"	**	**

Sizes under 6 inches, take 6 inch list.

Saws concaved to smaller circle than 16 inches, advance 20% on list.

Extra sizes made to order. Price on application.

When ordering concave saws, give circle to which the saw is to be dished; also indicate to which side it is to be dished or concaved, right- or left-hand, saw running toward you. (See cut.)

# CHAMFERING SAW

These saws are used in conjunction with Concave Saws for cutting a Chamfer on heads of



Barrels and Kegs. The teeth are milled to make a shear cut. The front of tooth beveled to 60°.

Diameter 6 inch 6½ " Size of Hole 2 inch Thickness 3/8 inch Number of Tee 18 \$10.40 each 11.60 "

Special sizes and patterns, prices on application.

# CYLINDER SAW

We make all patterns of Cylinder Saws, both brazed and open joint. Bottom saws with or without heads.



Prices quoted on receipt of specifications.


# LOCK-CORNER CUTTERS



Prices quoted on receipt of specifications

# CIRCULAR KNIVES CORK, CLOTH, CANDY, LEATHER OR RUBBER

CORK KNIFE



When ordering specify material to be cut, diameter, gauge, size of hole, whether beveled on one or both sides, and depth of bevel.

	Di	ame	eter									List	Price	e					Thicke	ess
	T	ò	10	inches.	 		 	 	 		 	80	.57	per	inch	in	dia	nete	r, 🔧	inch
Over				44									.65		**			"	į	"
"	12	"	14	"	 				 		 		.72		**			**	į	"
"	14	"	16	"	 	 					 		.80	1	**			"	i	"
64	16	"	18	"	 			 _	 		 		.88					"	5	"
**	18	"	20	"	 			 ì	 		 		.95		**			"	3.4	**
44	20	"	22	"		 				i		1	.04		**			**	3.	**
"	22	"	24	"	 	 	 ì		 		 	1	. 12		"			44	32	"
"	24	"	26	- 66	 				 		 	. 1	.20	)				"	3	"
**	26	"	28	**	 		 i	 Ĺ				1	.27		**			**	3	"
"	28	"	30	**						Ī		ī	.35		**			"	-3	**
"	30	"	32	"	 		 Ì	 Ī				1	.51		"			**	3,	44
"	32	"	34	44							 	i	68		"				ı,	**
44	34	"	36	"	 				 		 	i	.90	)	**			"	į	

On Knives heavier than list, add 5 per cent. for each 1/64-inch gauge. For equivalents of gauge in inches, see page 7.

# TOOLS, SPRINGS, ETC.

We manufacture all sizes and styles of Springs, Cutting Implements and Tools

Flat Springs Loom Springs Slitter Blades Perforator Blades Candy Knives Shuttle Covers

Thrust Collars Enameling Plates (high finish)

Pattern Plates for Foundry use Plain Discs Automobile Clutch Discs, Etc.

Flat and Curved Plates for Scoring, Cutting and Creasing Presses. Punchings and Stampings of all descriptions.

Steel cut to all shapes.

Prices quoted on receipt of specifications

# BARREL STAVE SAWS

BEST CRUCIBLE STEEL, GROUND AND TEMPERED BY OUR IMPROVED PROCESS

#### CYLINDER SAW



Prices of STRAIGHT CYLINDER SAWS with shafts and heads only, for Keg. Half Barrel and Barrel Stave Sawing Machines

Diameter Inches	Length Over all	Price	Diameter Inches	Length Over all	Price
inches	Over all	Frice	Inches	Over all	Frice
11	19	\$148.00	16	42	\$380.00
12	23	169.00	18	42	405.00
13	23	187.00	20	42	422.00
14	23	205.00	24	<b>4</b> 6	477.00
15	23	224.00	24	48	481.00
16	23	249.00	26	48	568.00
20	23	295.00	26	53	675.00
16	36	346.00	36	72	1688.00

# **BILGING CYLINDER SAWS**

WITH SHAFT AND HEAD ONLY



Diameter Inches 10 to 15 16 Length over all Inches 28 36

Price \$320.00 355.00

# RESTEELING STRAIGHT CYLINDER SAWS

WITH SOLID STEEL EDGES

Diameter, inches	Length, inches	Edge, inches	Price
8 to 12	23 or less	6	\$35.00
12	24 to 30	64	40.00
14	36	6	45.00
16	36	64	50.00
18	40	7-	55.00
20	42	7 <u>4</u>	60.00
22	44	8	65.00
24	46	81	75.00
24	48	81	75.00
<b>2</b> 6	48	8 <u>¥</u>	85.00
26	53	81	85.00


Resteeling Prices NET; not subject to Discount.

#### RESTEELING BILGE SAWS

Diameter	Length	Edge	Price
10" to 15"	28"	6"	\$60.00
16"	36"	6"	100.00

Resteeling Prices NET; not subject to Discount.

Saws to be delivered, freight paid, at factory. Extra charge for boxing. Extra charge for truing bearings. Extra charge for balancing cylinders.



#### CYLINDER SAW GUMMER

The frame is so constructed as readily to allow raising or lowering the emery wheel; and the wheel is easily moved to any angle required while gumming

Receiving pulley in head of gummer, 2½ in. diameter, 2 in. face, and should be run at speed of 1600 to 1800 revolutions.

Furnished complete with ½ inch round belt and one emery wheel 7 inches diameter and ½ inch thick.

Complete, \$36.50




Made of a Disston quality of steel specially suited for this and other similar work. Teeth of proper shape and pitch. Hardened under our improved process, not ground on sides.

Diameter of Cutter	Thickness in Decimals	Size of Hole	Diameter of Cutter	Thickness in Decimals	Size of Hole
	.182	l in.	21 in.	.045	₹ in.
23 "	. 162	44	21 "	.040	
23 "	. 144	44	1 2! "	.035	"
2 4 "	. 128	and 1 in	21 "	.032	½, ‡ and ‡ in.
2 4	.114	* " "	21 "	.028	., ., .,
2} "	. 102	11 11	21 "	.025	" "
2 3 "	.091	** **	2 ! "	.023	" "
2 } "	.081	** **	21 "	.020	"
2 } "	.072	" "	2 i "	.018	46 46
2 3 ''	.064	1, 1, 1 and 1 in.	2 1 "	.016	
2 3 ''	.057	4, 6, 4,	21 "	.014	" "
2 4 ''	.051	" "	21 "	.012	" "
2} "	.045	"	21 " 21 " 21 " 21 " 21 " 21 " 21 " 21 "	.010	" "
2 } ''	.040	" "	21 "	.008	" "
23 "	.035	** **	21 "	.006	" "
2} "	.032	" "	13 "	.064	∦ in.
2 } "	.028		13 "	.057	٠,,
2 } "	.025	" "	13 "	.051	"
2	.023	" "	13 "	.045	**
2 4 "	.020		13 "	.040	"
2 * "	.018	** **	13 "	.035	"
2 4 "	.016	"	13 "	.032	"
2 * "	.014	" "	14 "	.028	"
2 3 "	.012		13 "	.025	"
2 3 "	.010	"	14 "	.023	"
2 3 "	.008	" "	13 "	.020	🖁, 🗓 and 🖥 in
2 3 "	.006	"	13 "	.018	
2 i "	. 102	∦ in.	13 "	.016	" "
2 ! "	.091	***	13 "	.014	" "
2 4 "	.081	**	13 "	.012	"
22222222222222222222222222222222222222	. 072	**	221 I I I I I I I I I I I I I I I I I I	.010	"
2 . "	.064	**	13 "	.008	"
2 . "	.057	"	13 "	.006	" "
21 "	.051	**	ŧ -		

Special sizes made to order

Standard Cutters, 27 in. diam., made with 72 teeth; 27 in., 60 teeth; 17 in., 90 teeth

Prices quoted on application



FORMED TOOTH

These saws are made of a quality of steel exactly suiting the purpose for which they are intended. The teeth are of such shape as to render them strong and effective cutters. Hardened by our improved process and accurately ground thin towards centre for clearance.

Special saws of any pattern made to order.

Saws 21/2 inches diameter have 7/3 inch hole; 3 to 10 inches, 1 inch hole.

Diameter	Thick	ness									
	32	64	16	32	1/8	32	16	$\frac{7}{32}$	1/4	16	
$2\frac{1}{2}$ "	.\$1.25	1.25	1.25	1.35	1.40	1.50	1.60				each
3"	. 1.40	1.40	1.40	1.50	1.55	1.65	1.75				44
4"	. 1.70	1.70	1.70	1.80	2.00	2.10	2.20	2.30	2.40		"
5"	. 2.05	2.05	2.05	2.20	2.40	2.55	2.70	2.85	3.00	3.25	"
6"	. 2.50	2.50	2.50	2.70	2.95	3.15	3.30	3.50	3.70	4.05	"
7"		2.90	2.90	3.10	3.40	3.70	3.90	4.15	4.40	4.90	"
8"		4.00	4.00	4.30	4.60	5.00	5.40	5.80	6.20	6.60	"
9"			5.25	5.50	5.80	6.15	6.45	6.90	7.35	7.80	"
0''	<b></b>	·	6.50	6.75	7.00	7.25	7.50	8.00	8.50	9.00	"


Semi-high speed saws advance 25%. Formed tooth slitting saws advance 25%.

For prices on high-speed steel Metal Slitting saws, see page 46.

# CIRCULAR MILLING SAWS

#### HIGH CARBON CRUCIBLE STEEL

FOR CUTTING METAL AT SLOW SPEED



Diam.	Thickness, inches										
Inches	ì	₩.	ł	r's	ł	78	<del>)</del>				
12	\$8 50	9 50	10 50	11 75	13 00	14 00	15 00 each				
14	9 75	11 00	13 00	14 25	15 75	17 50	18 75 "				
16	11.75	13 50	15 00	17 25	19 25	21 00	23 50 "				
iñ	14 75	15 50	18 25	20 50	23 00	25 50	28 00 "				
20	17 50	18 50	21 00	25 50	27 50	30 50	33 50 "				
22		21 50	24 75	29 25	32 75	36 50	39 50 "				
24		26 25	30 50	35 00	38 75	43 00	48 00 "				
26		28 50	34 00	41 00	45 50	49 50	54 50 "				
28			37 50	44 25	50 50	56 25	62 00 "				
30			44 00	50 00	57 00	64 00	71 00 "				
32			53 00	61 00	68 00	76 00	82 00 **				
34			58 50	67 00	75 50	84 00	92 50 "				
36			65 00	74 00	84 00	93 00	102 50 "				
38				88 50	98 50	110 00	121 00 "				
40				107.00	118.50	132 50	143 00 "				
42				118 00	132 50	144 00	157 50 "				
44					142 50	157 00	172 00 "				
46					155 50	172 00	187 50 "				
48					174 00	192 50	210 50 "				
48 50					194.00	215 00	236 00 "				

Saws 22, 24 and 26 inch, 1/2 inch or less in thickness, advance 25%

Saws 28, 30, 32, 34 and 36 inch, less than in thickness, advance 50%

Bored and drilled to specifications for any standard make of Milling machine When ordering, state size of bore, size, position and number of pin holes, space and shape of

teeth, and diameter of collars used

The above list covers cost of saws ground than toward centre for clearance. Saws of this pattern

also finished of same thickness at center and rim, and teeth swaged or set to obtain clearance in cut.

Semi-High Speed Saws advance 25%

Prices on Saws of special dimensions quoted on receipt of specifications


Milling Saws made over, remilled, not ground-40% price of new saws of same dimensions

Milling Saws made over, remilled, and ground-60% price of new saws of same dimensions

Milling Saws made over, not remilled nor reground—20% price of new saws of same dimensions. Owner to accept risk of breakage which may be incurred in reworking process.

We manufacture Saws for all makes of milling machines, including Burke Machinery Co., Burr & Son. Cochrane & Bly. Espen Lucas. Lea Simplex Machine, Newton Machine Tool Works. Nutter, Barnes & Co.


# SPECIAL MILLING SAWS



36 inches 201 231 25 28 311 Diameter . 16 Thickness. 3 Price . . . . \$13.50 Semi-High Speed Saws advance 25%

The above list covers cost of saws ground thin towards centre for clearance. Saws of this pattern also finished of same thickness at centre and rim, and teeth set to obtain clearance in cut.

# SPECIAL MILLING SAWS



	HIGL	EY AND L	ea-simi	PLEX PA	TTERN		
Diameter 12½ Thickness	131 11.00	14 37 11.00	13	15 18 .50	16 13.50	18 15.50	20 inches 3 " 18.50 each
Diameter 21 Thickness	24 26.25	26 18 28.50 Semi-High	28 37.50 Speed Se	31 3 53.00 we adva		36 11 79.00	40 inches 112.75 each

Prices on saws of special dimensions quoted on receipt of specifications.
Milling Saws made over, remilled, not ground—40% price of new saws of same dimensions.
Milling Saws made over, remilled, and ground—60% price of new saws of same dimensions.
Milling Saws made over, not remilled not reground—20% price of same dimensions.
Owner to accept risk of breakage which may be incurred in reworking process.

# HIGH-SPEED STEEL METAL SAWS

Inches 2½ 2½ 2½ 2½	32				Each		Inches	Each
21		\$2.40	.3.	12	\$19.50	17	1	\$105.00
21	64	2.60	8	$\frac{\frac{3}{16}}{\frac{7}{32}}$	22.60	17	1 5 16 5 32 3 16	122.00
	76	2.70	8	1	24.60	18	32	83.00
21/2	$\frac{1}{16}$ $\frac{3}{32}$	2.90	8	16	30.40	18	3 16	94.00
21/2	18	3.30	9	16	12.40	18	32	105.00
21	5 3 2	3.70	9	3 2	15.50	18	1 16 3 3 3 16 7 3 2	116.00
2½ 2½ 3 3	3 3 16 1 3 2 3 64	4.10	9	1 8 5 32	18.40	18	16	138.00
3	32	2.80	9	32	21.40	19	32	92.00
3	64	2.95	9	3 16 7 32	24.50	19 19	16	105.00
3	16	3.20	9		28.00			117.00
3 3 3 3	32 32 16 32 16 132	3.50	9	1 5 16 16	30.40	19 19	1 4 16 5 32 16 7 32	130.00 154.00
3	8	4.00	9	16	37.60 15.00	20	16	101.00
3	32	4.60 5.00	10	16	18.00	20	3 2	115.00
3	16	3.80	10	3 <sup>2</sup> 1	21.75	20	16	128.00
4					25.50	20		142.00
4	64	4.05	10 10	3 3 16	28.75	20	16 16 16 7 3 16	170.00
4	16	4.35 5.00	10	16 7 32	33.75	21	16	126.00
4	32	5.75	10	3.2	36.60	21	16	140.00
4	3 64 16 3 3 2 1 8 5 3 2	6.75	10	1 1 16	45.50	21	1 4	156.00
		7.50	11		36.50	21	5 16	185.00
4	16	8.60	11	1 8 5 3 2	41.50	22	3.	137.00
4	32	9.25	11	3.2	46.50	22	7 7 7 7	152.00
5	1	9.25 4.50	11	3 16 7 32	51.00	22	1	170.00
5	316 372 34 4 312 32 64	4.75	11	1	56.00	22	16 7 32 1 4 5	205.00
-5		5.40	11	5 16	62.00	22	3	149.00
5	16	6.20	12	16	36.50	23	$\frac{\frac{3}{16}}{\frac{7}{32}}$	166.00
5	32	7.20	12	*	41.50	23	1	185.00
5	3	8.35	12	32 16 32	46.50	23	16 3 16	222.00
5 5 5 5 5 5 5 5 5 6	1 16 3 32 1 8 5 32 32 32 16	9.30	12 .	32	51.00	24	16	161.00
5	372	10.40	12	1	56.00	24	7 3 2	179.00
5	1	11.25	12	1 4 5 16	62.00	24	16	200.00
5	36	13.00	13	1	42.00	24	16	240.00
	16 16 32 64	5.60	13	32	47.50	25	1 4 5 16	219.00
6	84	6.20	13	16	53.50	25	16	260.00
6	16 32 32 8 8 8 52 16	6.80	13	372	59.00	26	16 16 16 14	235.00
6	32	8.20	13	16	65.00	26	16	280.00
6	1	9.50	13	16	72.00	27	1	252.00 302.00
6	32	11.00	14	8	47.00	27 28	16	275.00
6		12.60	14	37	54.00			320.00
6	32	13.90	14	16 7 32	60.50	28 30	16	315.00
6	1	15.00	14	32	67.00 74.00	30	1	366.00
6 7	16	18.40 7.50	14 14	16	84.00	30	16	400.00
7	7 32 1 5 16 3 64 16	9.00	15	16 35 32	57.00	30	5 1 4 5 16 11 32 32 38	435.00
		10.40	15	3 2	68.00	31		335.00
7 7	32	12.50	15	3 16 7 32	76.00	31	14 5 16 11 32 32 38	396.00
7	8	14.00	15	3 2	84.00	31	11	434.00
7	32	15.50	15	16	96.00	31	1	470.00
7	32 16 7 32	17.90	16	16 5 32	67.00	32	75	422.00
7		19.45	16	3,2	76.00	32	11 32	460.00
7	16 16 3 64 16 3 3	24.00	16	3 16 7 32	85.00	32	38	498.00
8	33,	9.00	16	1	94.00	34	11 32	520.00
8	16	10.40	16	1 4 5 1 6 1 6 1 6 1 6 1 6 1 6 1 6 1 6 1 6 1	108.00	34	1	560.00
8	32	12.30	17	32	75.00	36	3 8	622.00
8	18	15.00	17	316	85.00	36	7	715.00
8	37	17.20	17	32	95.00	36	1/2	810.00

Saws 22, 24 and 26 inch, ½ inch or less in thickness, advance 25%.

Saws 28, 30, 23, 34 and 36 inch, less than ½ inch in thickness, advance 50%.

We make High-Speed Steel Milling Saws of all regular parterns and sizes, also to special specifications. When ordering, state size of bore, size, position and number of pin holes, space and shape of teeth and diameter of collars used, also character of work for which saw is required.

# SEMI-HIGH SPEED STEEL MILLING SAWS

Diam. Inches	Thickness Inches	Price Each	Diam. Inches	Thickness Inches	Price Each	Diam. Inches	Thickness Inches	Price Each
21	र्फ हरे के		8	1,5		17	ŧ	
21	हरेंद		8	3/3		17		
21	138		8	4		18	37	
2 }	3/3		8	1,6		18	18	
2 i 2 i	Ţ		9	τţe		18	2,2	
	សុ		9	3/2		18	į	1 1
2½ 3 3 3 3 3	78		9	ŝ		19	1/8	
3	33		<u>ۇ</u> .	32		l ij	37	
1	55		g i	3,6		lié	1,6	
3	X		9	**		19	**	
3	77		9	3.		i9	٠,١	
3	45		10	116		20	37	
	18		10	33		20	118	
4	32		10	Ţ		20	37	
4	14		10	332		20	Ţ	
4	rje		10	134		20		
4	s <sup>i</sup> s		10	2,2		21 21 21 21 22 22 22	13.	
4	ŧ		10	į.		21	ΣŹΣ	
4	1/2		10	1,4		1 51	į.	** **
4	196		1 11	į		21	1,6	
	373		l ii	Y <sub>2</sub>		55	ıλ̂ε	
7	1		l ii	7	• • • •	22	37.2	
3	32		l ii	3,2 1,		55	٤	
ś	<b>3</b> .		l ii	3.		23	13.	• • • • • • • • • • • • • • • • • • • •
5	*******************		12	ï		22 23 23		
5	ï		12	**		23	ï	
4555555555566	ห้า		12 12 12 12 12 13	18		23	3/3 1/6 1/6	
5	3 <sup>3</sup> 7 1 <sup>3</sup> 6		12	37		24	136	
5	177 164 177 164 178 178 178		12	j j		24	777 L + 5 /6	
5	1		12	1 <sup>2</sup> 6		24	}	
2	iş.		13	į		24	16	
9	177		1 13	2,5		25 25	ŝ	
2	<u> 77</u>		i3	1.6		26	176	
6	3	•	13	32		26	3.	
6	**		l iš	3.		27	10	
ĕ			14	12		27	, ž	
6	*		14	į.		28	Ţ	
6	17 16 17		14	13		28	176	
6	3		14	377		30	Ţ	
6	15		14	ş		30	1,6	
7	र्दे		14	1,0		30	33	
1 7	1.0		15 15 15 15	4,4		30	į	
۱ 4	27		1 15	τ¢		31	ŧ	
4	į		1 12	2,2		31	l'f	
4	3		15	1		31	2,7	
1 <del>'</del> 7	7		16	这点——这是"这一"的是一个一个,这个一个,这个一个一个一个一个一个一个一个一个一个一个一个一个一个一个		32	, <b>š</b> ,	
7	"		16	32		32	ii.	
7	4		16	;;		32	ï	
8	ä		16	ï		34	43	
8	7,6		16	16		34	ï	
8	7		17	*		36	i	
66666667777777788888888888888888888888			17			36	1/8	
8	37		17	1 6 3 7		36	ģ	

Semi-high Speed Steel is an alloy quality of our own development between High Carbon and High Speed Steels. The cost is intermediate, and saws made of this steel give proportionate results.

Prices Quoted on Application

# CIRCULAR SAWS

#### FOR CUTTING HOT METALS AT HIGH SPEED

In ordering, give distance between points of teeth. Hot saws less than 36 inches in diameter take straight ground slate saw list below:

Diam.	Thickness of Plate	Price Each	Each 1/32 in. Heavier	Diam.	Thickness of Plate	Price Each	Each 1/32 in. Heavier
36 in. 38 " 40 "	के in. उन्ने "	\$37.00 42.00 49.00	\$2.30 2.55 2.85	50 in. 52 " 54 "	급 in. 참 "	\$77.00 84.00 90.00	\$4.45 4.80 4.80
42 " 44 " 46 " 48 "		53.00 56.00 60.00 64.00	3.15 3.45 3.75 4.10	56 " 58 " 60 "		106.00 113.00 121.00	5.55 5.95 6.40

#### FRICTION DISCS

# FOR CUTTING COLD METAL AT HIGH SPEED DISCS ARE PLATES WITHOUT TEETH

Discs less than 36 inches in diameter take straight ground state saw list less 10%


Diam. 36 in. 38 " 40 "	Thickness of Plate	Price Each \$30.00 32.00 35.00	Each 1/32 in. Heavier \$1.90 2.15 2.40	Net Price Each Nicked Edge \$0.95 1.00 1.05	Diam. 50 in. 52 "	Thickness of Plate	Price Each \$57.00 63.00 68.00	Each 1/32 in. Heavier \$3.70 4.00 4.30	Net Price Each Nicked Edge \$1.35 1.45 1.55
42 " 44 " 46 " 48 "	* *	37.00 40.00 43.00 46.00	2.60 2.85 3.15 3.45	1.10 1.20 1.25 1.30	56 " 58 " 60 "	1 ::	82.00 88.00 95.00	4.60 4.95 5.30	1.65 1.80 1.95

# SLATE SAWS

OIL TR	EATED AND HOLLOW (	ROUND	ı	UNGROU	ND	
Diam. 14 inches	Thickness of Plate 10 gauge	Price \$7.00 each	Diam.	Thickness of Plate	Price Each	
16 "	10 544	8.50 "	36 inches	4 gauge	\$26.00	
iš "	*9 "	10.50 "	38 "	4 "	29.00	
20 "	8 "	13.50 "	40 "	4 "	32.00	
22 "	, "	16.00 "	42 "	3 "	38.00	
4 "	<b>6</b> "	20.00 "	44 "	3 "	40.00	
26 "	6 "	23.00 "	46 "	3 "	42.00	
.0	ŭ	25.00	48 "	2 "	47.00	
	STRAIGHT GROUND		36 "	0 "	34.00	
	SIRAIGHI GROOND		38 "	ŏ "	38.00	
l4 inches	10 gauge	\$4.50 each	.40 "	ŏ "	42.00	
16 "	10 "	5.00 "	42 "	ō "	45.00	
8 "	9 "	6.50 "	44 "	0 "	49.00	-
90 "	8 "	8.00 "	46 "	ŏ "	53.00	
22 "	7	10.00 "	48 "	ň "	57.00	
4 "	6 "	12.00 "				
26 "	6 "	14.00 "	36	00 & 1 inch	37.00	
28 "	5 "	16.00 "	J0	00 " 🕯 "	41.00	
30 "	5	19.00 "	40 "	00 " 🕴 "	45.00	
32 "	ξ"	22.00 "	42 "	00 " 🖁 "	49.00	
4 "	. ć"	25.00 "	44 "	00 " 1 "	53.00	
•		23.00	46 "	00 " 1 "	57.00	
			48 "	00 " 1 "	61.00	

We also make Circular Saws with inserted teeth for cutting slate

# "INTERLOCKING" TOOTH SAW



re manufactured with adjustable base for teeth as shown in cut above, also with solid base for teeth as illustrated on page 52, Made any diameter or thickness wanted

This pattern of Inserted Tooth Circular Milling Saw is the result of many years' experience in manufacturing saws and numerous practical tests in actual operation.

The Interlocked represents the highest type of milling saw. It is the fastest cutting, most powerful and durable metal-cutting saw ever made.

Once properly adjusted, the teeth are practically immovable: in fact, the harder the pull, the tighter they hold. The teeth are of Disston High-speed Steel. and plate of best quality high carbon steel, specially treated.

#### SAWS WITH ADJUSTABLE BASE


Diam. 14 in. 16 " 18 " 20 "	Thickness of Plate te in.	Size of Tooth No. 1 1	Width of Kerf in.	No. of Teeth 28 32 36 40,		Diam. 40 in. 42 " 44 " 46 "	Thickness of Plate 16 in. 16 " 16 "	Size of Tooth No. 4 4 4	Width of Kerf te in. te "	No. of Teeth 52 54 56 58	
20 " 22 " 24 " 26 "	* " * " * " * " * " * " * " * " * " * "	2 2 2 2	1::	40 44 48 52	140.00 154.00 167.00 181.00	48 " 50 " 52 " 54 "	10 " 10 " 10 "	4 4 5 5	10 "	60 62 56 58	400.00 420.00 475.00 507.00
30 " 32 " 34 " 36 " 38 "	1."	3 3 3 3	"	44 46 50 52 54	202.00 215.00 233.00 245.00 265.00	56 " 58 " 60 "	1	5 5 5		60 62 64	527.00 550.00 575.00

<b>EXTRA</b>	"INTERLOCKING"	TEETH
	HIGH-SPEED STEEL	

	No. I	No 1	No. 2	No. 2	No. 2	No. 3	No. 4	No. 5
Plate	📆 in.	in.	in.	🕁 in.	in.	🖠 in.	👬 in.	⅓ in.
Kerf	¥".	<b>.</b> *"	∄ "	1."	18 ."	j "	· · ·	
Price, Teeth		1.00	1.00	1.10	1.20	1.90	2.40	3.25 each
" Wedges	. 30	. 30	.30	.35	. 35	.40	.45	.50 "

# DISSTON SECTIONAL INTERLOCKED

INSERTED TOOTH CIRCULAR



View showing detail of teeth in Disston Sectional Interlocked Saw. One wedge firmly locks four to six teeth in place, depending on size of saw.

PATENTED JULY 27, 1915; Oct. 15, 1918.

The Disston Sectional Interlocked Inserted Tooth Metal Cutting Saw is made for use in cutting irregular shapes, hard steel rails, gates and risers for steel castings, and wherever a fine pitch of tooth is needed.

#### Four Points of Merit

- The teeth are milled from high-speed steel, and are so formed that they taper slightly, on both sides, from the cutting edge of the tooth to the blade, thus allowing for ample clearance where most needed.
- 2. The cutting-edge ends of each tooth are slightly beveled, but alternating right and left, the bevel is heavier on one side of the cutting edge than on the other, thus breaking the chip and reducing the strain on the saw.
- The blade is manufactured from Disston-made steel, is of uniform thickness, and always retains its original diameter. It can be operated with 50% less power than a solid tooth blade.
- 4. We guarantee from 100 to 300% more service from this saw than can be obtained from any other saw designed for this purpose

We are in a position to prove these points by practical tests, at our expense, on any of the standard makes of circular milling saw machines now on the market.

FOR PRICES, SEE NEXT PAGE

# DISSTON INSERTED TOOTH

Patented July 27, 1915 Oct. 15, 1918	SECTIONAL INTERLOCKED
Oct. 13, 1918	CIDCIII AD MILI INC CAW


CIRCULAR MILLING SAW											
Diameter Inches	Thickness Inches	Kerf Inches 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Pattern	Teeth 56	Price Each						
12	47	*7	В	56	\$90.00						
14	¥.	¥.	B B C	60	100.00						
16	¥	¥4	В	68	115.00						
14 16 16	<del>1</del>	7		68	120.00						
18	4.	3/3	B C B C	76	135.00						
18 20	¥	¥	С	76	140 00						
20	**	1,	В	84 .	145 00						
20	\$2 16 \$2 \$2 16	33		84	150.00						
20	16	1	F	76	140.00						
20	1,0	Å	H	72	145.00						
20 20	4	. 7	L	72	150.00						
22	16 16	į	L C	92	165.00						
22	~ 1 <sup>3</sup> 6	1	F	84	150.00						
22	1,0	· 1	H	80	155 <b>00</b>						
22 22	Å	ĩ	Ľ C	80	165.00 185.00						
24	16 16	I .		100							
24	1 .	18	·H	88	175.00						
24	Å.	Ŧ	L H	88	185.00						
26	¥	<del>1</del> 6	Н	96	190.00						
26	<del>1</del> 6	1	L	96	200.00						
28	1	1	Н	100	200.00						
28	4	1	L H	100 108	210.00						
30	7	16	Н	108	220 00						
30	10	Ŧ	.L	108	235.00						
32	*	i i	L	116	250.00						
34	16 16 16	ł	L	124 132 132	265.00						
36	Ä	i	L	132	290.00						
36	T T	Ĥ	N		310.00						
38	18	1	L	136	315.00						
38	1	Ĥ	N L N	136	325.00						
40	4	¥	L	144	340.00						
40	10	Ĥ	N	144	360.00						
42	<u> </u>	11	N	152	385.00						
44	i	#	N	160	410.00 435.00						
46	i	ij	N	164							
48	<del>- i -</del>	14	N	172	460.00						
5ŏ	i	Ħ	N	180	490.00						

EXTRA TEETH, High Speed Steel

Pattern	Thick	of Kerf	Price	Pattern	Thick	of Kerr	eo ee
Α	in.	🛧 in.	\$0.45 each	G	32 In.	373 in.	\$0.55 each
B	1	7 "	.45 "	H	Ţ"	3 "	.55 "
č	37 "	12 "	.50 "	K	<u>.                                    </u>	<u> </u>	.60 "
×	Ţ.,	¥	.50 "	ī	32 "	¥ "	.60 "
Ď	33	¥ "	.50 "	М	16 14 "	<b>4</b> "	.70 "
F	4 "	16 "	.55 "	Ñ	7 "	<del>ii</del> "	.70 "
•		•	Wedges, all si	zes \$0.30	each		

\_\_\_

# DISSTON ECLIPSE SOLID BASE INSERTED TOOTH CIRCULAR MILLING SAW



This pattern of Inserted Tooth is adaptable for the smaller and thinner saws such as are required In the pattern of Inserted Looth is adaptable for the smaller and thinner saws such as are required for the lighter grades of work, i.e., cutting small, this stock, giving an intermediate pitch of too between our regular pattern of Interlocked and Sectional Interlocked Saws. It is also made in larger sizes and thicker plates suitable for heavy cutting in solid forgings, etc.

The design of this saw permits the use of a greater number and finer teeth with reduced pitch than the ordinary patterns of Inserted Tooth Saws.

The teeth are made of Disston High-speed Steel and the plate is of the best quality High Carbon Steel. The price of the saw is moderate; the cost of up-keep is unusually low. It is an economical saw for all kinds of metal cutting.

#### ECLIPSE SOLID BASE SAWS

Diameter 10 in. 12 "	Thick- ness	Kerf	Pat- tern Z	No. of Teeth 30 36	Price Each \$62.00	Diam- eter 30 in.	Thick- ness 14 in.	Kerf 14 in.	Pat- tern S S	No. of Teeth 60	Price Each \$205.00
14 ·· 16 ··	и и	\$ ::	Z Z Z Z Z	42 48	72.00 82.00 95.00	34 "	<u> </u>	й	š	64 68	215.00 225.00
iš "	<u> </u>	<del>- 1</del>		- 54 20	106.00	36 "	× :	¥ :	S	72 76	240.00 260.00
12 ··	₹:	X:	X	24 28	60.00 67.00 75.00	40	_ × ::	ж.:	S	80 84	280.00 300.00
16 "	* ··	- <del>14 "</del>		32	75.00 84.00 95.00	44 " 46 "	¥ ::	¥ ::	S 8	88 92	320.00 330.00
20 " 22 " 24 " 26 "	\$ ::	×	X	40	105.00	48 " 50 "	* :	***	S S S	96 100	350.00 370.00
	¥ ::	× ::		48 52	110.00 125.00	40	<b>\$</b> ::	\$ ::	R R	80 84	305.00 325.00
24	× ::	<b>*</b> ::	w	44 48	115.00 120.00	44 "	<u> </u>	<u> </u>	<u> </u>	88	345.00
28 "	% "_	Ž ::	W	52 56	130.00 145.00	46 " 48 "	\$:	\$ :: '	R	92 96	365.00 380.00
30 ·· 32 ··	ž.	<b>*</b> ::	ű	60 64	155.00 172.00	50 " 52 "	<b>Ż</b> :	\$ ::	R	100 104	425.00 440.00
36 "	** :	X :-	Ü	68 72	185.00 198.00	54 " 56 "	<b>*</b> ::	<b>4</b> ::	R	108 112	470.00 495.00
ž. ··	\$ :	2	Ť	44 48 52	125.00 135.00 145.00	58 ::	¥:	¥ ::	R	116 120	\$20.00 \$65.00
26 ·· 28 ·· 30 ··	<u> </u>	¥	Ť	56	160.00	§2 ::	¥::	¥ ::	Q	104 108	490.00 520.00
32 "	¥ ::	ж. ж.	Ť	60 64 68	185.00 205.00	56 " 58 " 60 "	ж. ж.	й: #:	ğ	112 116	\$50.00 \$85.00
34 ··	X	й "	Ť	68 72	220.00	60 "	я	я́ "	ŏ	120	620.00

EXTRA TEETH, ECLIPSE SOLID BASE SAWS



# "PREMIER"

INSERTED TOOTH

(Teeth of High-Spred Steel)


CIRCULAR SAW FOR METAL

Patented March 5, 1907

DIFFERENT FROM ALL OTHERS IN PATTERN AND MATERIAL

The teeth, which are made of the very best High-Speed Steel, are alternately round top and oval top. The round top tooth and round top. The round top tooth sheep beautiful beyond the oval top tooth breaks the way by cutting a groove, while the oval top tooth following, cuts out the remaining sides to full width of kerf. Cutting in this manner gives three chips instead of a single wide one, permitting greater speed, requiring less power and allowing teeth to clear chips out of kerf easily. Teeth are held in place by inverted taper wedges, tightened by screw in wedge, the teeth being adjustable in sockets by screws acting on bottom of teeth.

Particularly adapted for use in Steel Foundries and Forges for the cutting of large stock.

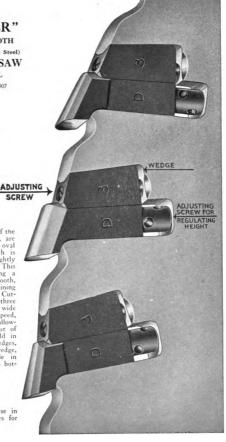

For prices see next page

Trade Mark Registered U. S. Patent Office

# "PREMIER" SAW

Patented March 5, 1907

ROUND TOP





Scores the way

Cuts full width of kerf

Screw Adjustment-

No straining of plate by hammering.

TEETH QUICKLY INSERTED AND REMOVED—
Cannot jump out or chatter.

RUNS SMOOTH WHILE AT WORK-

No pounding.

MINIMUM AMOUNT OF POWER REQUIRED— No waste power.

The teeth can be re-ground by any good mechanic. To facilitate this work, we make a special sharpening machine, the "Premier Grinder."



INVERTED WEDGE

View of socket showing screw for regulating the height of tooth

Width No. of

Thickness Size

Diam.	Thickness of Plate	Size of Tooth	Width of Kerf	No. of Teeth	Price Each
16 in.	₁⁵ in.	No. 1	₫ in.	30	\$120.00
18 "	* "	" 1	į "	34	130.00
20 "	¥ "	" 1	į "	38	144.00
22 "	ሉ ። ሉ ። ት ።	" 1	1 "	42	160.00
24 "	· 18 "	" 1	3 "	46	175.00
26 "	3 "	" i	į "	50	192.00
28 "	₹ " 16 "	" i	į"	52	202.00
30 "	¥ "	" i	į "	56	218.00
32 "	1	2	j "	48	240.00
34 "	į "	" 2	į "	52	255.00
36 "	į "	" 2	į "	54	265.00
38 "	ž "	" 2	j "	58	290.00
40 "	i "	" 2	į "	60	305.00

Diam	of Plate	of Tooth	of Kerf	Teeth	Each
42 in.	₁¼ in.	No. 3	åin.	52	\$330.00
44 "	13 " 14 "	" 3	¥ "	54	350.00
46 "	7 "	" 3	· "	56	365.00
48 "	Ť "	" 3	16 "_	58	385.00
50 "	17 "	" 4	₩ "	54	445.00
52 "	13 "	" 4		56	470.00
54 "	13 "	" 4	₩"	58	500. <b>00</b>
56 "	ij; "	" 4	18 " 18 " 18 "	60	525.00
58 "	1 "	" 5	<del>18</del> "	58	605.00
60 "	į "	" 5	<del>      "</del> "	60	630.00
62 "	1 "	" 5	₩ ".	62	665.00
64 "	ł "	" 5	<del>11</del> "	64	695.00

No.	1 No. 2	No. 3	No. 4	No. 5	No. 7
Extra Teeth	0 1.50	1.90	2.40	3.10	7.50 each
" Wedges	0 .60	.70	.80	.90	1.50 "
" Adjusting Screws1	0 .10	.12	.15	.25	.35 "
" Wedge Screws	5 .05	.05	.08	.10	.12 "

For Foundry Use teeth cutting a wider kerf can be furnished.


and durable. The use of a cup wheel gives a straight or flat finish on top of tooth instead

of concaving as would be the case in grinding with the face of a circular wheel.

Built specially for the purpose, this machine will save its cost many times over. Send for descriptive booklet. Price, \$115.00.

# DISSTON PRECISE SHARPENING MACHINE

for Sectional Interlocked Inserted and Solid Tooth Circular Metal-Cutting Saws

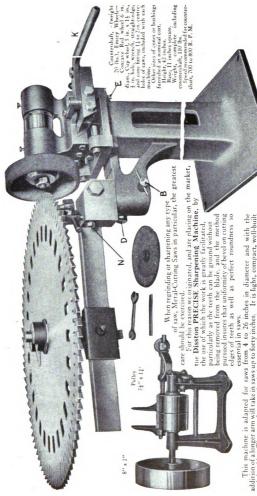

Digitized by Google

# **BAND SAWS**



ALL DISSTON BAND SAWS and BAND RESAWS are made of Disston High-Grade Crucible Steel, hardened and tempered by Special Processes exclusively our own.

			RICES	FOR	BAND	SAWS	SET,	, SH	IARPI	ENE	D AND	JO	INEC	CC	MI	PLETE	
					Decim:	al weight foot	per	foot							Dec	rimal weigh per foot	t per foot
2	in.	wide,	18 to	20 s	ra	28	\$1.	00	8	in.	wide,	14	to 1	16 g	a.	1.76	\$3.80
2½ 3	**	"	"			.35	1.	20	9	"	"		**			2.20	4.30
3 -	"	"	"		" .	42	1.	40	10	"	"		"		"	2.81	4.80
31/2	"	"	"		"	. 50	1.	60	11	"	"		"		"	3.09	5.40
4	"	"	17 to	19	"	.57	2.	00	12	"	"	13	to	15	••	3.37	6.00
4 }	**	"	"		" .	64	2.	20	13	"	**		"		"	3.65	7.20
5	"	"	"		" .	83	2.	40	14	"	"		"	•	•	4.50	8.40
51	"	"	"		" .	89	2.	70	15	"	**	12	to 1	14 '		4.82	10.20
6	"	"	**		" 1.	.06	3.	00	16	"	"		"		4	5.92	12.00
7	"	"	16 to	18	" 1.	.37	3.	40	17	"	"		"	•	4	6.29	16.80
									18	"	**		"	•	•	6.66	21.60

Saws of odd widths, not listed, take price of next wider size listed.
Saws of heavier gauge than listed, add 5% to list for each gauge heavier.
No extra charge for saws one or two gauges thinner than list; when more than two gauges thinner, add 5% to list for each gauge.

DOUBLE-EDGE BAND SAWS: List price per foot, all widths, advance 10% over list prices of single-edge saws as above.


TOOTHED BLANKS, same price as finished saws.

BAND SAW BLANKS, Bright, of any width, furnished to order but not warranted.

#### Instructions for Ordering

When ordering Band Saws, state whether Right or Left-hand, gauge or thickness, space, depth and shape of teeth, straight or crowning back. If the saws are to be accoming on back, we finish them  $\frac{1}{4}$  in. crowning to each hey feet in length, unless otherwise instructed.


Silver Solder, for brazing Band Saws, carried in stock, in widths 1/2, 1/4, 1/4 and 1 inch, put up in coils of one ounce. Price \$1.00 per ounce, net.



# NARROW BAND SAWS

Order all saws by Number of Points to the inch.

In one inch space there is one tooth less than points.



7 Points or 6 Teeth

Give full particulars when ordering

### PRICES FOR BAND SAWS SET AND FILED. NOT JOINED

				Standard points per inch	Weight (lbs.) per 100 ft.	Price per foot	Brazing
1	inch	wide	22 or 23 gauge	8	1.05	\$0.13	\$0.50 each
Ä	. "	"	21 " 22 "	7	1.57	. 13	.50 "
¥	46	"	21 " 22 "	6	2.35	. 13	.50 ''
ě	**	"	21 " 22 "	54	3.52	. 14	.50 "
į	**	**	21 " 22 "	5	5.36	. 15	.50 ''
ŧ	"	"	21 " 22 "	41/2	6 70	. 16	.60 ''
1	"	"	20 " 21 "	4	8.05	. 18	.60 "
Ī	"	"	20 " 21 "	4	9.39	.20	.60 ''
ı°	"	"	20 " 21 "	31	11.75	.22	.70 ''
11	"	"	19 " 20 "	3 1/2	13.16	. 24	.70 ''
11	"	"	19 " 20 "	31	14.71	.26	.70 ''
1	"	"	19 " 20 "	3-	16.08	.28	.80 ''
1	"	"	19 " 20 "	3	17.63	.32	.80 ''
1	"	**	19 " 20 "	3	20.57	. 38	.80 ''

For saws of heavier gauge than listed, add 5% to list for each gauge heavier.

No extra charge for saws one or two gauges thinner than list; when more than two gauges thinner, add 5% to list for each gauge.

If not filed and set, deduct 4 cents per foot.

Narrow band saws with beveled backs, advance list 50% for first gauge, and 10% for each additional gauge.

# "MOHAWK"

#### BAND SAW GUIDE

Invented by R. McChesney

The only absolutely non-friction guide. Prevents cracking and breaking of the saw; will not crystallize or disturb the temper of the blade. Descriptive circular on request.

#### No. 1

Guide complete for saws up to 1-inch wide.

#### No. 2

Guide complete for saws up to 2-inch wide.



# BAND SAWS FOR METAL

#### TEMPERED THROUGHOUT

PURNISHED IN SPECIAL LENGTHS OF COILS UP TO SE

1	inch	wide		nuge	Net Prices for Joining
ì	••	**	21 or 22		30.15 each
į			21 or 22		
		_ ;;	21 or 22	254 "	<u>-</u> ]
4	**	**	20 or 21		
1	"	"	20 or 21	"	
11	-:-	-:-			.25 "
11				"	``{
iş	**		19 or 20	"	
- 12	**	**	19	"	.1

#### FLEXIBLE-BACK BAND SAWS

Hardened on tooth-edge only, for cutting metal. Furnished in special lengths or coils from 50 feet to 500 feet.

					Ste	oc k	Widths, Gauges and Points		Per Foot	Net Prices for Joining
3	inch	wide	x	23	gai	ige			80.084	
ì		4	x	23	•	٠.٢			.104	15
į	٠ ١	•	x	21		"		<b>.</b> 1	-	
į	٠	•	x	23		"	16, 19, 22 or 26 "	}	.111	15
7	· ·	•	x	21		"	14, 16, 18 or 22 "			
1	٠ ،		×	23		"	14 17 10 22		.131	25
- 3	, ,	14	×	21		**	14, 16 or 18 "		. 151	25
i	'	•	x	20	or	21				25
ī			x	20	or	21	" with suitable		. 184	25
H	٠,	4	x	20			" tooth for			25
u	•	•	x	19	or	20	" the }			25
I,	'	•	x	19	or	20				
14			x	19	or	20	" to be		. 264	
1		•	x	19			" cut		. 29	

These Bandsaws are extensively used for sawing High-speed steel, tool steel, machinery steel, brass, bronze, copper, aluminum, mica, slate, fibre, zinc, tubing, pipe, sheet metals, spelter and any other material a file will cut.


The following tooth space is recommended for the various classes of work:

Brass or bronze	Steel or brass tubing
Sheet steel	Aluminum

When ordering Metal Cutting Bandsaws, specify length, width, thickness or gauge and NUMBER OF POINTS to the inch; also state the kind, shape and size of metal to be cut and the make of machine on which the saw is to be operated.

Note:-In one-inch space there is one tooth less than points.

....19




14 Points or 13 Teeth

The thinner the material the smaller the tooth should be for best results. The work should be firmly held on table so it will not wabble or jerk, which will save and lengthen the life of the saw.

These saws should not be run faster than 120 feet per minute when cutting hard metals.

# NARROW BAND SAW SETTING MACHINE



# NARROW BAND SAW FILING MACHINE

Simple, Efficient, Accurate.

Strongly made, easily adjusted, re-

easily adjusted, requiring no attention after being started.
Will take saws \( \frac{1}{2}\)" wide, with teeth \( \frac{1}{2}\)" to \( \frac{2}{3}\)" space and will file old saws with uneven teeth as perfectly as new ones; all teeth being filed to same height, saws will keep sharp longer, and each tooth doing its proportionate amount of work prevents

breakage. Uses 6" Taper Saw Files, and should run 50 to 60 revolutions per minute.

Price, \$55.00 each



# MANDRELS FOR CIRCULAR SAWS



#### SELF-OILING BOXES

PULLEY IN CENTRE

	Diameter of Shaft	Hole in Saw	Length over all	Centre to Centre of Boxes	Diameter of Pulley	Face of Pulley	Diameter of Collar	Price Each
No. 201	116"	1 "	151"	83 "	21"	31"	2⅓"	\$14.20
" 202	13	11	17 <del>1</del>	9 <del>11</del>	3*	4	3	16.40
" <b>203</b>	1 36	11/4	19 <del>]</del>	11 <del>1</del>	31	41	31	19.60
" 204	176	1 15	21 🖁	12‡	4	5	4	23.50
" 205	176	1 3 5	24 <del>1</del>	14 <del>   3</del>	41/2	5 <u>3</u>	41/2	25.75
" 206	176	12	26 <del>1</del>	16}	5	6	5	27.75
<b>" 207</b>	176	1 <del> </del>	28 <u>1</u>	18 <del>7</del>	5 1	61	5 3	29.75
<b>" 208</b>	1 36	1 <del>1</del>	30 <u>₹</u>	20₹	6	7	6	37.40
" 209	111	1#	33	22	7	8	6	51.00
" 210	111	1 🛊	35	23½	8	8	6	55.00

Distance from

#### CONNECTED BOX



#### SELF-OILING BOXES

	Diameter of Shaft	Hole in Saw	Length over all	Distance from Centre to Centre of Boxes	Diameter of Pulley	Face of Pulley	Diameter of Collar	Price Each
No. 301	1 <del>16</del> "	1 "	19 "	8 <del>1</del> "	21"	31"	2}"	\$14.20
" 302	134	1‡	211	9 <u>}</u>	3	4	3 -	15.85
" 303	13	11	23 3	111	31	41	31/	19.25
" 304	17	15	263	12 🖣	4	5	4	23.25
" 305	1.7	134	293	143	41	54	44	25.75
" 306	1.7	ī å	32 <del>1</del>	163	5	6	5*	27.75
" 307	1.7	13	35	183	51	61	51	29.75
" 308	1.2	iå	37%	201	6	7	6	37.00
" 309	111	īź	41	22	7	8	6	50.50
" 310	112	1 \$	423	231	8	8	6	54.50

The above mandrel is made with pulley on right-hand side, with left-hand thread, unless otherwise ordered

In order to obtain the best results and the maximum output from Circular Mill Saws, a good mandrel is an absolute

In order to ootan the cert results and the manifestation of the control of the co

# MANDRELS FOR CIRCULAR SAWS

PULLEY IN CENTRE



#### SELF-OILING BOXES

Made with pulley on right-hand side of saw, per cut, with left-hand thread, unless otherwise ordered

					Distance from				
		Diameter of Shaft	Hole in Saw	Length over all	Centre to Centre of Boxes	Diameter of Pulley	Face of Pulley	Diameter of Collar	Price Each
						3//	211	2//	
No.	00	<del>11</del> "	₹"	141"	7 <del>1</del> ′′	2"	3"	2"	\$11.60
66	0	ij	į	141	7 <del>1</del>	2	3	2	12.20
"	1	17.	1	151	81	21	31	21/2	13.00
66	2	1 3 4	11	17	9₹	3	4	3	15.30
44	3	134	1 <del>1</del>	19	11 <del>1</del>	31	41	3 <u>1</u>	18.10
"	4	17	134	217	12}	4	5	4	22.40
"	5	176	1 3	24 <del>1</del>	14 <del> </del>	41	51	41/2	24.40
66	6	176	1	26 <del>1</del>	16 <del>1</del>	5	6	5	<b>26.40</b>
"	7	176	1 🖁	28 <del>1</del>	18 <del>3</del>	5 <u>1</u>	6 <del>1</del>	5 <del>]</del>	28.40
"	8	1 76	11	30 <u>₹</u>	20 <del>1</del>	6	7	6	35. <b>20</b>
44	9	1 <del>11</del>	1 🖁	33	22	7	8	6	47.60
44	10	111	11	35	23 <del>1</del>	8	8	6	51.00



	Diameter of Shaft	Hole in Saw	Length over all	Centre to Centre	Diameter of Pulley	Face of Pulley	Diameter of Collar	Price Each
No. 400 80-lb. Balance Whee	117"	1}"	48"	27''	5"	6"	5"	\$59.00
" 401 110 " "	1 16	1 ½	60	37	6	7	6	76.00

Made with pulley on left-hand end, with right-hand thread,

unless otherwise ordered

All our Mandrels have self-oiling boxes and require no additional attention in this respect for a long time after filling of oil reservoir, the oil being carried to bearings by a ring revolving on shaft.

#### SPECIAL SIZES MADE TO ORDER

When ordering special Saw Mandrels send sketch giving distance from centre to centre of boxes, also position of pulley. State whether the pulley is wanted on the right- or left-hand side of Mandrel when saw is running toward you.

# MANDRELS FOR CIRCULAR SAWS

WITH PULLEY ON END



SELF-OILING BOXES

		Diameter of Shaft	Hole in Saw	Length over all	Distance from Centre to Centre of Boxes	Diameter of Pulley	Face of Pulley	Diameter of Collar	Price Each
No.	000	<del>15</del> "	3''	17"	711"	2" .	3"	2"	\$11.60
66		ijš	ì	17	7₹	2	3	2	12.20
"	101	17	1	19	81	21	31	21	13.60
**	102	13	11	214	9}	3	4	3 *	15.60
"	103	13	11	23 -	111	31	41	31	18.40
66	104	1.7	13.	263	12	4	5	4	23.00
66	105	1,76	1.3	29	143	41	51	41	24.90
"	106	1.3	14	32 <del>1</del>	16	5	6	5	26.90
66	107	1.7	īå	35	18	51	61	54	28.90
44	108	1.2	11	371	201	6	7	6	35.75
44	109	ĩij	15	41	22	7	8	6	48.75
46	110	112	1 \$	423	231	8	8	6	52.75

Made with pulley on right-hand end with left-hand thread unless otherwise ordered.

SPECIAL SIZES MADE TO ORDER

# SPEED INDICATOR




Weight, 5 ounces

Correct and reliable. Any speed can be accurately counted.

# GULLET-TOOTH CIRCULAR SAW

A MOST VALUABLE AND USEFUL IMPROVEMENT




By reference to the above illustration it will be observed that the back or point line of each tooth is the continuation of the spiral lines Z, and the sharpening is mainly done by the reduction of the gullet or throat only. This is readily accomplished by the use of our patent gummers, illustrated on pages following.

The course pursued by the cutter is spiral, and while it is in the act of reducing the front or throat of the tooth D, it is prolonging the back or point-line of the tooth C. The illustration represents a two-inch tooth or gullet. The saw B is the saw A worn down. When the saw has been reduced on centre line from G to F, it has been worn but six inches, yet has presented a cutting surface on spiral line Z from G to Y, a distance of twenty-four inches. But this is only one of the advantages claimed for our patent gullet-tooth. The throat or gullet being chambered out on a half-circle forms a large receptacle or chamber for dust and thus a one-and-a-half-inch tooth of this pattern will keep a saw as free from choking as a two-inch tooth of the ordinary shape.

# VICTOR SELF-FEEDING SAW GUMMER

PRICE, complete with one cutter-shaft, cutter-grinder and three cutters, \$31.00 each



The Victor is made of the very best material, the lighter parts being of malleable iron and the shaft of steel, making it lighter, and at the same time stronger than other gummers. The Victor will gum all saws, from a small circular saw with a 3-inch gullet, to the largest made, with 13-inch gullet; also all mill, mulay and cross-cut saws. Cut shows the Victor gummer in position for work on a sixtyinch circular saw.

Place the gummer on the saw with the feed-screw towards the front of the saw, with the carriage drawn well back, and the cutter resting on the back of the tooth next to the gullet to be gummed. The feed-screw should point in the direction you wish the cutter to cut. If such is the case, clamp the ma-

chine to the saw by tightening the two clamp-screws at the bottom of the clamps.

Set the notch of the brass gauge over the point of the tooth and secure it by means of the screw. Then to adjust the gummer, so it will take the same position on each tooth, set the screw or "L" gauge down on the teeth, using whichever best suits the kind of saw you are gumming. Throw the pawl into the ratchet-wheel on the cutter-shaft, which will prevent the cutter turning backwards while at work. The cutter is very liable to be broken if reversed while in the gullet.

Stand behind the saw, try the crank and if it does not turn freely, back the cutter until it does; then throw the feed-pawl into the circular rack on the feed-screw and gum until the gullet is chambered

to the required denth.

Then set the stop that is under the cutter-shaft up to the rocking-lever to prevent the feed-pawl from turning the feed-screw. This will cause the feed to stop at this point and make all the gullets the same depth. The first tooth being now gummed, throw out the feed-pawl and screw back the cutter to the starting point. Loosen the clamp-screws and move the gummer to the next tooth, placing the brass gauge on the point as before; screw up the clamp-screws, throw in the feed-pawl, and gum until you reach the stop, which has been adjusted on the first tooth gummed.

If all the gauges and stops are properly adjusted on the first tooth, all the gullets will be of the same depth. If when you first put the gummer in position the feed-screw does not point in the direction you wish to gum, loosen four screws that hold the clamp to the circular plate and turn the plate until the feed-screw reaches the proper position. Then tighten the four screws and clamp the machine to the saw. The gummer can be set to gum at any angle from horizontal to perpendicular by simply

turning the circular plate.

We make three sizes of cutter-shafts for this gummer. The No. 1, or large shaft is the same diameter as is used in our No. 1 gummer, and is suitable for 1, 14, 14 and 14-inch cutters. The No. 2 or medium shaft is suitable for cutters 4, 4, 2 and 2-inch. The No. 3 or small shaft is made specially for 3-inch cutters.

#### WHEN ORDERING GUMMERS STATE SIZE OF CUTTERS WANTED


Extra shafts can be furnished with the gummers at \$3,40 each so that all above sizes may be used in one machine if so desired.

## PATENT DOUBLE-GEARED, No. 1 SAW GUMMER

OR CHAMBERING MACHINE FOR CIRCULAR SAWS
40 INCHES AND LARGER

Including Cutter-Holder and three Cutters of any of the following sizes: 1, 11, 11, 12 and 11 inches. When ordering, specify the size wanted.

One-inch Cutter is the smallest size that can be used on this Gummer.



DIRECTIONS FOR USING THIS GUMMER

Run the cutter back by means of screw G as far as necessary, then place machine on the saw, with the cutter close up in the chamber of the tooth to be gummed.

If the teeth are regular and the same distance apart, start the cutter in any chamber; but, if they are irregular, make them even by commencing in the smallest tooth. After gumming the saw a few times the teeth must become regular. E is a set-screw to regulate the depth of gullet. Fasten the machine to the saw by means of the screws B, and proceed to gum the first tooth, one of the points of the star being struck at each revolution by a projection on the handle steadily feeding the cutter until arrested by set-screw E. Remove the machine to the next tooth towards you, after having run the cutter back and proceed as before until all of the teeth are gummed.

The cutter is so arranged as to slide on its axis and when one portion becomes dull, remove a washer from back to front, and thus present a new sharp-cutting surface; and so continue changing the washers until the whole face of the cutter becomes dull.

The ratchet by which the cutter is moved effectually prevents any back motion which hitherto has been a serious objection.

This gummer is a most invaluable machine, and should be in the hands of every mill-man. It saves power, files and time, and is so simple in its mode of operation that any man can readily be taught to use it.


# PARTS OF VICTOR SAW GUMMER



1, Plate; 2, Shaft; 3, No. 1 Ratchet; 4, Wrench; 5, Brass Gauge; 6, No. 2 Ratchet Spring; Feed Screw; 8, Stop Gauge; 9, Stop; 10, Crank; 11, Throw; 12, No. 1 Ratchet Spring; 13, Stand, 14, No. 1 Pawl; 15, Ball Lever; 16, Carriage; 17, Ball Lever Spring; 18, Long Clamp; 19, No. 2 Pawl; 20, Short Clamp; 21, No. 2 Feed Ratchet; 22, Cam; 23, Short Clamp Clamp Screw; 24, Long Clamp Glamp Screw; 25, Short Clamp Adjusting Screw; 26, Long Clamp Adjusting Screw; 27, Short Clamp Gauge; 28, Long Clamp Gauge; 29, Long and short Clamp Gauge Screw; 30, Long Clamp Thumb Screw; 31, Short Clamp Thumb Screw; 32, Carriage Screw for Stand.

When ordering, specify the No. of part and name of Gummer Prices Quoted on Application

# PARTS OF No. 1 SAW GUMMER



1, Star; 2, Arm; 3, Frame; 4, Large Wrench; 5, Small Wrench; 6, Swivel Bearing; 7, Left-hand Crank; 8, Cutter Shaft; 9, Feed Screw; 10, Crank Shaft; 11, Gauge; 12, Gauge; 13, Swivel Nut; 14, Cross Handle; 15, Right-hand Crank; 16, Ratchet; 17, Ratchet Spring; 18, Large Gear Wheel; 19, Pawl; 20, Out-bearing; 21, Wrought Iron Gauge; 22, Collar for Feed-acrew.

When ordering, specify the No. of part and name of Gummer

Prices Quoted on Application

# CUTTER GRINDER

FOR HOLDING THE GUMMER CUTTER IN POSITION DURING PROCESS OF SHARPENING



The stone should have a perfectly straight face and turn from the operator. Lower the adjustable frame of Grinder until the cutter touches the stone, then adjust the spring in proper position. 

Price . . Give full particulars when ordering



#### **GUMMER CUTTERS**

Cutters for No. 1 Gummer have Arinch hole. Cutters for No. 2 Gummer have Arinch hole. The 1-inch to 14-inch cutters are for the No. 1 Gummer, and the 1 to 1-inch for the No. 2 Gummer.

,1111 and 1 11 inch 70 1.15 1.20 .50 1.30 1.40 each SPECIAL CUTTERS MADE TO ORDER

BORTHWICK'S STATIONARY SAW SHARPENING MACHINE OR EMERY WHEEL GUMMER



Price, with Emery Wheel . .

.... \$29.50 each

. \$2.15each

#### EMERY WHEELS

OF SUPERIOR QUALITY, FOR GUMMING AND SHARPENING SAWS The stock size is 12 inches diameter, 2-inch thick, 1-inch hole, bevel edge. Prices quoted on application. Special sizes made to order



This Press is made in two sizes or weights, and of a style rendering it strong and durable for punching, slotting, toothing or shearing purposes.

No. 1 Press weighs 460 lbs., and is adapted for gumming saws or punching steel up to 5 gauge (37 inch) in thickness.

No. 2 Press weighs 250 lbs., and will gum saws up to 8 gauge ( $\frac{5}{32}$  inch) in thickness.

Extra punches and dies or shear blades furnished on order at special price.

This is a very desirable and powerful machine, and we recommend it for re-toothing band, gang and other saws, as well as for general purposes. When ordering state the purpose for which the press is intended.

# HAND SHEAR



This Hand Shear will be found a very useful and convenient tool for trimming the ends of broken band saws for joining, shearing to width and other jobbing work. It will cut steel as heavy as 13 gauge. The Shear blades are slotted so they can readily be adjusted to take up any wear, and being bolted in position are easily removed for grinding when they become dull.

Price, complete . . . . . . . \$90.00

# **ECCENTRIC SWAGE**


FOR CIRCULAR SAWS Con Contract SECTIONAL VIEW SHOWING MANNER IN WHICH THE TOOTH IS SPREAD OR SWAGED

No. 0, Eccentric Swage, adapted for circular saws from 6 to 12 gauge in thickness
8—Bracket 9—Bench-rest 10—Bench-rest Stud 11—Bench-rest Set Screw
For other parts, see page 70
When ordering send sketch of teeth

Price quoted on application

# ECCENTRIC SWAGE


Made in three sizes. No. 1, adapted for saws 12 to 16 gauge: No. 2. 16 to 19 gauge; No. 3, 20 gauge and lighter. By use of extra brackets can be used for cylinder and circular saws. When ordering, state thickness of saws on which Swage is to be used and send sketch of teeth



When Disston Eccentric Swage is ordered, in the absence of other instructions, the No. 1 will be adjusted for our standard pattern of L tooth, 13 inch spacing,

L 13/4"

# PARTS OF ECCENTRIC SWAGE FOR BAND SAWS



- Long Clamp Screw
- Short Clamp Screw Anvil
- Band Bracket
- 6. Bracket Screw
- Bracket Washer
- 9. Bench Rest
- 11. Bench Rest Set

- Screw
- 12. Tooth Rest 13. Tension Screw
- 14. Tension Spring
- 15. Tension Stud
- 16. Hex-head Cap Screw
- Bracket 161 Button-head Screw
- 10. Bench Rest Stud
  - Lever Kest

  - 18. Lever Guide Screw 19. Anvil Top Screw
  - 20. Clamp Screw Nut
  - 21. Clamp Screw Lever 22. Die Lever
    - 23. Lever Rest Screw
    - 24. Packing Piece for Short Clamp Screw
- Nos. 6, 19, 20 30. Wrench for Screws

27. Block

Nos. 23, 25, 26 When ordering, specify the number of part, and state whether for No. 0, 1, 2 or 3 Eccentric Swage.

26. Short Clamp Screw

Wrench for Screws

Set Screw

Bushing

Prices Quoted on Application

### HENRY DISSTON & SONS



FOR BAND AND GANG SAWS

Price quoted on application


When ordering, state thickness of saw and space of teeth on which Shaper is to be used

This Swage Shaper is the best tool of its kind on the market. Combining solidity with simplicity, yet few parts to get out of order. No wrench is necessary, the shaper can be taken apart by the loosening of three thumb-screws. The dies fit snugly in the body, and will not twist or come out of line.

All wearing parts are made of best tool steel, accurately machined and milled to a perfect fit.

This Swage Shaper is designed for the purpose of making all the teeth of a uniform width and at the same time give them the "back" and "under-cut" necessary for proper clearance and smooth sawing. It can readily be adjusted to rapidly shape teeth on saws of any thickness.

### PARTS OF SWAGE SHAPER



- 1. Body
- 2. Right-hand Jaw 3. Left-hand Jaw 4. Operating Screws
- 5. Lever 6. Dies
- 7. Tooth-rest Bar
- 8. Tooth-stop Tooth-stop Holder
- 10. Adjusting-screw
- 11. Adjusting-screw Nut 12. Adjusting-screw Jam Nut
- 13. Guide
- 14. Screw for 9 and 13 15. Nut for Lever

When ordering, specify the No. of part for Swage Shaper Prices quoted on application

### HOLDER FOR GRINDING SWAGE SHAPER DIES

With this adjustable holder a die is ground quickly and uniformly, without use of gauge.

Positions 1 and 2 are for grinding the angles which must be of equal length on each pair of dies. Posi-

tion 3 is for shortening the die and squaring the face. It is necessary to grind the face only when dies are of unequal length or when the bevel becomes too long.

Can be used on the table of any grinding machine, the only requirement being a stop-plate for the holder to rest against.

Furnished free with each swage shaper.

### TABLE FOR GRINDER



Stop plate for holder to rest against is screwed to wheel side of grinding table, as shown in Fig. 4.






Special attention is called to the Conqueror Swages, Nos. 0 and 00, with projecting tongues. The tongue resting on face of rooth, acts as a guide to obtain the topoter analy for swages. The Conqueror has tiven entire satisfaction and indispensable to any sawyer who uses the spread set. Every wages sold by us is warranted perfect. The swages themselves shall be their own recommendation.

CONQUEROR HENRY DISSTON & SONS

Packed one in wooden box

# "CONOUEROR" SWAGE, JUMPER OR UPSET



For large Circular Saws. \$5.50 each.



This is of an intermediate size, between the Nos. 2 For small Circular and Mill Saws, not heavier than 10 gauge.

The upper opening in the swage being rounded on the bottom, takes its bearing on the centre of the tooth, spreading and shaping it as shown on ection of tooth H. The lower opening (in which tooth is shown in illustration) is used for squaring up and leaves the tooth as shown at G.

The bottom of the openings in the Conqueror being slotted, it is impossible to blunt or injure the fine cutting edge of the tooth, which is frequently the result with soils awages. One of the principal drawbacks in the manufacture of boil of awages; as the difficulty experienced in properly hardening them at the bottom of the opening, which portion of the swage does all the work and requires to be hardened in the most perfect manner.

The Conqueror is hardened before the sleeve is driven on, and the hardening composition passes freely through the slots at the bottom of the openings, thus insuring an even and correct hardening in that portion of the swage where it is most required.

Packed one in wooden box

84.50 each.

No. 2

HENRY DISSTON & SONS

PHILA - PA

## "CONQUEROR" SWAGE

Trade Mark Registered U. S. Patent Office



No. 3
For small Circular and narrow Band Saws not heavier than 15 gauge, \$3.50 each



No. 4 For Band Saws, \$4.50 each Packed one in wooden box

## No. 100 CHAMPION SAW SETTING TOOL

FOR CROSS-CUT SAWS



\$16.00 per dozen
Packed one in pasteboard box


## SPRING SAW-SET, No. 2

FOR BAND, SHINGLE OR VENEER SAWS



No	. 2.	Iron H	landle.	Length	over	all t	8 inches	(slots	12 (	o 1	7 g	a.)	\$2.60	each
**	1.	Wood	Handle.	**	**	" 7	, "	"	12 '	' 1'	7 '	<b>'</b>	. 2.60	**
**	3.	"	"	**	**	"15	; "	**	5 '	1	، 2	٠	. 6.25	**

## MACHINE FOR SETTING CIRCULAR SAWS



Aside from character of steel, temper and workmanship, the successful operation of circular saws depends largely upon the manner in which saws are fitted. To obtain best results the teeth should be properly and evenly set. This Machine does the work perfectly, insuring easy running and smooth cutting.

Adjustable for saws from 5" to 24" diameter.

Force of blow of hammer can be adjusted to any thickness of saw.

The set of each tooth must necessarily be uniform, as hammer strikes every blow with equal force at the same angle; is adjustable to give heavy, medium or light set, and will do more and better work than any other machine of its kind.



## SET GAUGE

For regulating the amount of set for Shingle, Heading, Veneer and Jointer Saws.

Price ..... \$1.90 each

## **SWAGE BAR**



### SWAGE BARS, 8 or 6-sided

Number	Length	Diam., Large End	Diam., Small End	
1	14 inches	2 inches	1 inch	\$11.25 each
ż	12 "	13 "	<u></u> "	7.80 "
3	io "	īi "	<b>i "</b>	5.80 "

Any size or pattern of Swage Bar furnished at special price



## IMPROVED ADJUSTABLE SETTING STAKE FOR CIRCULAR SAWS



This valuable tool made in two sizes, small size adjustable to set any saw from six to thirty inches in diameter, large size to fifty-six inches. The cone A is moved in or out to suit the diameter of the saw, and raised or lowered, as may be required. The movable anvil B is made of hardened steel, and some portions of the face being beveled more than others, the operator can regulate the amount of set as desired.

## IMPROVED SIDE FILE

MADE IN THREE SIZES

No. 1. Large size, suitable for saws 40 inches diameter and larger.

No. 2. Med. " " 38 to 24 inches diameter.

No. 3. Small " " 24 inches diameter and smaller.



This side file is used for the purpose of regulating saw teeth after they have been set.

It is impossible to set a saw so that some teeth will not extend or project a little more than others, and thus cause rough lumber.

By the use of this tool the set of all the teeth is made of a uniform width, and a saw thus regulated will run twice as long without sharpening. The file may be so adjusted by means of the set-screw, as to conform to any width of set desired. The jam-nuts secure the set-screws in the desired position.

Complete (all sizes)...\$1.80

## SIDE FILE

FOR BAND AND GANG SAWS



The body of this tool is made of malleable iron, case-hardened tooth rest, steel slides, screw adjustment to set file to give undercut to teeth.

The use of this tool makes all teeth of a perfectly uniform width of set, thus insuring smooth lumber.

## TOOLS FOR REPAIRING SAWS

SAW MAKERS' STRAIGHT-EDGES

## Five feet in length and under, \$2.00 per foot list.


Over five feet, price on application Special sizes to order, special prices

TENSION GAUGES



MADE TO ORDER

### TOOLS FOR HAMMERING SAWS




### SAW MAKERS' HAMMERS Price, \$2 00 per lb (No hammer at less than 21/2 lbs.)

SAW MAKERS' ANVILS-DISSTON PATTERN

	31111	LIG MITTED						
Face	Height	Weight						
54 x 8 inches	6 inches	70 pounds	-1					
54 x 8 inches 54 x 8 "	73	100 "	Prices					
6 x 10 "	81 "	150 "	quoted on					
Special sizes made to order 2PI								
Back Caude	fe v 21 inc v	1 in thick	J					

Other sizes, special prices



842.00 eacb


Brazing Clamps, for brazing saws up to 3 inches wide

## HENRY DISSTON & SONS

## TOOLS FOR BRAZING NARROW BAND SAWS BRAZE FINISHING CLAMP




### **BRAZING TONGS**



### **BRAZING CLAMP**

Suitable for Saws 1 inch wide and under

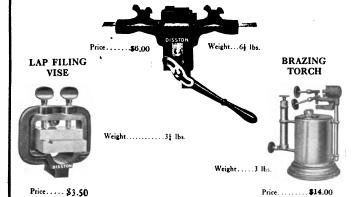

## HENRY DISSTON & SONS

## **BAND-SAW ANVILS**

DISSTON PATTERN





BAND-SAW ANVILS, CAST STEEL, HARDENED AND POLISHED FACES
Approximate Weight

		Approx	timate weight	
6 x 8 x 5 in	ches	70	pounds	)
6 x 10 x 5		85		
вх вхэ		95	"	Prices
8 x 10 x 5		115		On application
10 x 12 x 5		160		on application
10 x 14 x 5		185		[
12 x 16 x 5	"	260	"	<b>J</b>

## BAND-SAW LEVELLING BLOCKS, PLANED BOTH SIDES Approximate Weight

3	x	6	x	36	inc	hes	 				 	170	D	ound	s.	 	 		 			
3	х	8	х	36	• "		 			 	 	225	•	**		 	 		 	. [	D-:	
4	х	10	x	48	"		 			 	 	500	)	"		 	 ٠.		 	Į.	an annices	_
3 1	x	12	х	60	. "		 	,		 	 	655		"		 	 		 	ď	on application	
4	x	14	x	60	) "									"								

Special Sizes Made to Order

### **BULLY BOY SAW-SET**



This is a first-rate saw-set, and can be relied on to give satisfaction

### SAMSON SAW-SET


THE MOST USEFUL, POWERFUL AND DESIRABLE MADE



No. 1. Large size, wooden handle \$6.00 each No. 2. Small size, iron handle 3.00 "

Made of the best refined cast-steel, in two sections, and united in the centre by a bolt, which serves as an axis; thus it can readily be adjusted by means of the set-screw to suit thickness or gauge of any saw.

## MACHINE KNIVES



LISTING OR STAVE JOINTING KNIFE



CHIPPER KNIFE



HOG KNIFE



STAVE KNIFE



We desire to call particular attention to the Disston Machine Knives, of which we manufacture a full and complete line. We solicit an opportunity to quote on your next specifications.

## MULAY SAW

	Z	3	MARAMANAMANA MARAMANAMANAMANAMANAMANAMANAMANAMANAMANA		111	AA.			
	Width	4 gauge	S gauge	ogneg 9	7 gauge	8 gauge	9 gauge	10 gauge	
MIN AV CAWS	ا 16	\$11.20	10.60	9.6	8.80	8.20	7.60	7.00 per	joo Looj
MILL SAWS	4	9.6	9.0	8.20	7.60	2.00	6.40		3
MILL SAMS	12	8.40	7.80	2.00	6.40	9.00	5.40	4.80	3
LANCE TOOTH	=	7.60	2.00	6.40	5.80	5.40	4.80	4.40 "	ž
DRAG SAWS AND	2	7,00	6.40	5.80	5.20	4.80	4.40	4.00	:
DRAG SAWS OF	6	6.40	9.00	5.40	4.80	4.40	4.00	3.60	:
EQUAL WIDTH	<b>*</b>	9.00	2.60	2.00	4.40	<b>4</b> .00	3.60	3.40 "	:

List prices are for saws with Plain, Mill, Champion or Lance teeth. Saws with special patterns of teeth, special prices. Drag Saws taper ground, add 5% to list for each gauge taper grinding. All saws fitted, ready for use.




## MILL SAW

When ordering give length, width and thickness or gauge of Saw, also space from point to point of teeth, number of teeth, and distance from lower end of saw to point of first tooth. If Saws are to be drilled, send templer showing size and position of holes. Ends will be made per above illustrations unless otherwise ordered. ğ

..\$1.80 per foot 1.95 " "

16 gauge 16 "

## GANG SAW



All Gang Saws will be made with parallel ends unless otherwise specified Gang Saws with reversed teeth add 10% to list prices.

Tabbing with solid bent tabs or two plate tab, 4 hole \$1.00, 5,hole \$1.25, 6 hole \$1.50 per saw Tabbing with solid round tabs \$1.25 per saw.

Punching Gang Saws for tabs, two cents per hole, net.

When ordering Gang Saws give length, width, thickness by gauge, shape and space of teeth, number of teeth desired in saw and distance from end of saw to point of first tooth. When Saws are to be tabbed, EXACT DISTANCE between tabs MUST be given. Ordering I, Mulay and Drag Saw lists. Above prices are for saws fitted, ready for use lower end of saw to point of blanks may be had on application.

## DEAL SAW





HENRY

EQUAL WIDTH FULL LENGTH OF SAW

For prices, see Page 82.

## TAPERED BUTTING OR DRAG SAWS

## POWER OR MOTOR DRIVEN

The popularity of our regular and special patterns of Drug Saws and the steadily increasing demand for this type of saw, in connection with the growing with the growing was of the Motor-driven Drag Sawing Machine by both the logger and the man who owns the farm wood-lot, led us to publish a booklet on the care of Drag Saws and Tools for the purpose of assisting the user to keep his saws and tools in the best possible condition to obtain the maximum results. Mailed free on request.

## PLAIN TOOTH



TON

&

ISS

D

STANDARD STREET STREET THE STREET TO THE		
i	1 cauge 2.20	0
1	2.20	38
	= 70	<b>1</b> —
	Ē	
-	Thickness 1	
`~	Ë	
-	*00	0
-	10 gauge \$2.40	10
	2.73	10
~~	. 64	
~	:	: :
-	:	: :
	:	٠:
-		
_	:	: :
· ·	:	. :
-	:	: :
		: :
		: :
-	:	: :
~ .	:	: :
	:	2.00
-	:	: :
_	:	: :
-	:	: :
1100	:	: :
~	:	: :
<u> </u>	:	: :
-	:	
	:	: :
>		: •
,	.:	: :
	:	• :
_	يٰ	
~	.≌.	÷
· _	ے	
-	Ė:	=
-		
	, v	, 4.
	- # #:	÷
	\$ 3	
	نے ~	
	.=:	Ξ.
	100	- 9
	75.	4 9
	ي ق	٠
	<u>4</u>	
	Wath Tapered 8 in. butt, 6 in. point	

Made with either Mill Tooth, Champion Tooth, Single Hook Raker two-cutter, Single Hook Raker four-cutter, International, Nevada two-cutter, and Nevada four-cutter. Send for special booklet. All saws fitted, ready for use.

N S

s o

ğ

2.00 per 1.80 ii.

Tapered Drag Saws wider or thicker than above take the list price of Mill, Mulay and Drag Saws, using the average width as basis. When ordering, give length, width, thickness or gauge, style of teeth and templet of holes. Drag Saws, taper ground, add 5% to the list for each gauge taper grinding.

Digitized by Google



Length, 5ft. 10x31 in. 5ft ft. 104x31 in. 6ft. 104x31 in. 6ft. 104x31 in. 7tt. 11x31 in. 7f ft. 114x31 in. 8 ft. 114x31 in. Price, \$8.00 in. 12.00 in. 12.80 each

## WHIP SAW

# 

Length, 5 ft. 4 x 1½ in. 5½ ft. 44 x 1½ in. 6 ft. 4½ x 1½ in. 6½ ft. 4½ x 2 in.

Price, \$4.80

Above saws set and filed.



\$1.10 each

## POND ICE SAW (WITHOUT TILLER)



6.00 each 5.70 " 5.40 " 5.10 " 5.50 5.15 4.95 4.70 5.00 4.70 4.50 4.25 4.50 4.25 4.05 3.85 4.00 3.80 3.40 3.40 34 3.50 3.25 3.15 2.95 \$3.00 2.80 2.70 2.55 10 gauge 111 " 10 " 111 " Tapered, 8 x 6 inches : : :

Tillers, complete, as shown above..

## HAND ICE SAW, No. 80

(HOLLOW BACK)



\$10.50

13.50 per dozen

## HAND ICE SAWS

No. 70 BEECH HANDLE, POLISHED EDGE



\$16.00

26 17.00

18.00

30 inches 19.00 per dozen

No. 71. Hand Ice Saw, plain tooth, same price as above.

No. 73
MALLEABLE IRON HANDLE



\$19.00

20.00

21.00

30 inches 22.00 per dozen

No. 72. Hand Ice Saw, malleable iron handle, No. 70 tooth, same price as No. 73 Saw.

No. 74 PLAIN BEECH HANDLE





\$11.90

12.50

28 13.40 30 inches 14.40 per dozen

No. 75. Hand Ice Saw, same as above saw, with malleable iron handle, at following prices:

\$13.90

14 50

28 15.40

30 inches 16.40 per dozen

Packed one-sixth dozen in box

IN PRESENTING THE DISSTON LINE OF

### CROSS-CUT SAWS

WE DESIRE TO CALL PARTICULAR ATTENTION TO THEIR QUALITY AND THE METHOD OF MANUFACTURING

### POINTS OF MERIT

MATERIAL FINEST CRUCIBLE STEEL

The foundation of the Disston Saw is a steel made by our special process, in our own steel works. This process, the outgrowth of careful experimenting, was made pos-

sible by a thorough knowledge of the requirements of saws, the importance of having a steel particularly adapted to meet these requirements, and the policy of always making QUALITY the first consideration. Each ingot and plate is carefully inspected, tested and proved before being passed, thus insuring uniformity. We have manufactured Crucible Saw Steel since 1855.

HARDENING and TEMPERING DISSTON METHOD

without sacrificing their weight, stiffness or elasticity.

Being manufacturers of our own steel and thoroughly familiar with its make-up, we are able to absolutely adjust the Disston

special hardening and tempering processes to the degree giving that perfect combination of hardness and toughness that produces the "edge and set-holding qualities" for which the Disston Saws are renowned.

GRINDING

The Disston Cross-cut Saws are taper-ground. They are uni-DISSTON METHOD form in thickness on the cutting edges and a relative and uniform thickness throughout the body of the saws, the taper being ground on lines conforming to the breast of the saw to a thin or extra thin back, gives the saws the maximum amount of clearance at all parts of the blades

WORKMANSHIP DISSTON METHOD

In the blocking, polishing, stiffening and final processes of manufacture, the same high order of skill is exercised as in the hardening, tempering and grinding, the result being Saws of the highest quality and efficiency that human ingenuity coupled with skill, is capable of producing.

In the DISSTON BRAND of SAWS you have the advantages of the product of a progressive, up-to-date saw factory, the LARGEST IN THE WORLD, and where saws are made throughout, from the making of the steel itself—the superiority of which has been demonstrated for the past sixty-three years-to the finishing operation, and each process is performed by mechanics of long experience and highest order of skill.

### We Have Been Making Saws for Over 83 Years

No expense or care is spared in our efforts to produce The Best Saws in the world, and we guarantee the Disston Saws, under the same conditions, will run easier, cut faster and last longer than any other brand of saw on the market.

### HENRY DISSTON & SONS INCORPORATED

Keystone Saw, Tool, Steel and File Works PHILADELPHIA, U. S. A.

## CROSS-CUT SAWS

Trade Mark Registered U. S. Pat. Off

	الا المار ال
No. 287 DIAMOND POINT "VIM" CHAMPION	
"MIM"	Ø3
POINT	
DIAMOND	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
287	
Š	
	WWW. Sylater




## No. 397 WIZARD



## No. 285 "GREAT SOUTHERN"



## CROSS-CUT SAWS No. 599 TOLEDO BLADE

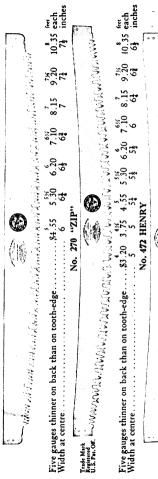

No. 470 BUZZ

Trade Mark Registered U. S. Pat. Off.

## CROSS-CUT SAWS No. 450 "CARIBOU" STRAIGHT BACK

50 "CARIBOU" STRAIGHT BACK FOR FELLING AND BUCK SAWING

4 4½ 5 5½ 6 6½ 7 7½ 8 644 Four gauges thinner on back than on tooth-edge......83.20 3.75 4.55 5.30 6.20 7.10 8.15 9.20 10.35 each Width at centre, all lengths, 5 inches No. 494 "BEAVER" HOLLOW BACK FOR FELLING AND BUCK SAWING

— ennin x hii x hii x hii x hii x hii x hii x xii x

No. 288 KENNEBAGO

Saws less than 4 feet in length take price of 4 feet to catalogued, extra price Coop-cut saws thinner than sixteen gauge, extra price. Saws ground thinner on back than catalogued, extra price

, \$6.80 7 . 6<del>}</del>

13 and 17 gauge.... Width at centre..

## No. 498 FELLING



Cross-cut saws heavier and saws ground thinner on back than catalogued, special price

Trade Mark Registered U. S. Pat. Office

CROSS-CUT SAWS No. 449 "COUGAR"

\$6.64 7.74 8 855 9 10 \$6.80 7.80 9.00 10.00 11.40 13.92 14.75 18.52 \$6\frac{1}{4}\$ 7 7\frac{1}{4}\$ 7\frac{1}{4}\$ 8 8\frac{1}{4}\$ No. 448 "COUGAR" FELLING

13 and 17 gauge... Width at centre...

12 feet 27.36 each 9½ inches

AND A THE A THE A THE TRUBE TO THE TAMENTAL TO THE TAMENT TO THE ACTION TO THE TRUBE TO THE TAMENT 
No. 299 FALCON

MATICALITATICATICALITATICALITATICALITATICALITATICALITATICALITATICALITATICALITA

\$6.80 7.80 9.00 10.00 11.40 13.92 14.75 18.52 27.36 each

Cross-cut saws heavier and saws ground thinner on back than carabogued, special price 12 and 17 gauge... Width at centre...

94

13 and 17 gauge....

8.80 each 7½ inches

8.25 74

7.70

TO THE POPULATION OF THE POPULATION OF THE SECOND SECOND OF THE SECOND O 6.7 6.80 6 

## No. 497 NEVADA





8 feet 8.80 each

8.25

## **CROSS-CUT SAWS**

No. 298 FALCON FELLING

MANY AND A MIN'S AND A THE ADD A WALL AND A THE A MIN'S ADD A THE ADD A THE ADD A THE ADD A MIN'S ABOUT ASSESSMENT ADD A THE A \$6.60 61 (1)

No. 496 NEVADA FELLING

THE REPORT WE A THE ATHER 
13 and 17 gauge...

Cross-cut saws heavier, and saws ground thinner on back than catalogued, special price.

13 and 17 gauge.....

## CROSS-CUT SAWS

No. 475 OREGON PERFORATED

MANANA DANA DANA ANA DANA DANA DANA DANA	MICHMALAM	THE THE T	HAN WAN H	MANNAN DELLE DEL
14 and 18 gauge	% 4.88 47.	5.25	5.63 7 <sup>2</sup>	6.00 each 8 inches
No. 473 OREGON NOT PERFORATED				
		The second secon	William Commence of the Commen	MINITED STATES
THE PARTIES OF THE	L WWW. LWW. H	STANDENTAN	WE WILL	AND THUE AND THE

5.63 8 28.5° No. 479 LANCE

6.00 each 81 inches

6.40 each
7½ inches MANA BUTTO I STORE THE THE THE FAIR FOR HAR HARDEN TOP THE TOP THE THE FILL HARDEN ×9.2 

PERFORATED, CUT END

Cross-cut saws heavier, and saws ground thinner on back than catalogued, special price.

8 feet 6.00 each 5.60 " 8‡ inches

## CROSS-CUT SAWS

No. 477 LANCE, PERFORATED

Four gauges thinner on back than on tooth-edge ... \$3.20 3.60 4.00 4.40 4.80 5.20 5.60 6.00 6.40 each Width at centre. ... 53 53 6 64 64 64 63 63 7 74 73 inches No. 1 "GREAT AMERICAN"

- "Comment of releated releated to the start of releated proposed on the start of the test and releated to the test and released to the start of the

5.25 5.62 6 4.90 5.25 8 No. 1. Five gauges thinner on back 1. 2. Two Width at centre.....

No. 365 "LANCET"

Four gauges thinner on back than on tooth-edge ... \$3.00 3.37 3.75 4.12 4.50 4.87 5.25 5.62 6.00 each Width at centre ... 

Saws less than 4 feet in length take price of 4 feet.
Cross-cut saws thinner than sixteen gauge, extra price. Saws ground thinner on back than catalogued, extra price.

Digitized by Google

inches

U.S. Par. Of.

## CKUSS-CUI SAWS "LUMBERMAN"

8 feet 6.00 each 5.60 " 8‡ inches 5.62 5.25 8 7. 5.25 4.90 73 4.55 4.55 4.74 4.50 4.20 74 5% 4.12 3.85 7 No. 1. Four gauges thinner on back than on tooth-edge \$3.00 3.37

2. Two
Width at centre.

64 64
64

## 

No. 1 DIAMOND

8 feet 6.00 each 5.60 " 8‡ inche 5.62 5.25 7.4 MANA BARA KARAN 6% 7 87 8.25 8 4.55 4.90 5 7\$ 7\$ 3.75 4.12 4.50 4 3.50 3.85 4.20 4 6\$ 6\$ 7\$ No. 1. Four gauges thinner on back than on tooch-edge \$3.00 3.37

Width at centre 64 64 64

No. 1 CHAMPION

 8 feet
 5.20 each
 4.80 "
 8\frac{1}{2} inches 4.87 4.50 84 4.55 4.20 8 2.92 2.70 64 No. 1. Four gauges thinner on back than on tooth-edge \$2.60 ". 2. Two No. 2 only Toothed to ends for Pacific C Width at centre . . .

Saws less than thinner than sixteen gauge, extra price. Saws ground thinner on back than catalogued, extra price.

Digitized by Google

## NARROW CROSS-CUT SAWS

Ŧ	
5	
KIUMP	
8	
۶	

HENRY

DISSTON

SONS

&

## ONE-MAN CROSS-CUT SAWS

Supplementary

Handle With

CEDAR-SAVAGE No. 410

the orders were for the control of t

Cedar-Savage No. 410.

482

7.07 7.07

ON DISSTON & SO.

FOUR CUTTER

Supplementary

With

D 210

ON DISSTON & SO,

The D210 One-Dut Saw in designed to meet the demand for a saw specially adapted for curting order. This saw in four-foot length measures exactly four feet from point of fare tooch to point of last tooch, making a convenient rule for marking off cut in four-foot lengths; a feature that is appreciated by eatst cutters. D-10 and D210. \$2.70 Width at butt. 7%

These Sterbets Sees are ground thin towards the back, narroget in width than repular one-man ares, deep teeth, extra wide gollera, raken special shaped with ness. The D-10 and D210 handles have extra large grip. Packed in quarrer dozen bundles.

6 feet 5.40 each 8½ inches "undercut" for

Supplementary

Handle

6 fret 5.00 each 8½ inches

## ONE-MAN CROSS-CUT SAWS

No. 373, "GREAT AMERICAN"



THE TOTAL SON GREAT AMERICAN We make an improved file for keeping the Great American tooth in order, and it should be ordered with the saws The Great American Saws furnished either Straight or Skewback at same price

## No. 1, EXTRA CHAMPION



3.10 7.10 Width at butt

ž 3.5.

4.45 74

χ. <del>3</del>. 85. 85.

6 feet 5.25 each 8½ inches

With Supplementary Handle

# AUCKLAND PATTERN DRAG TOOTH CROSS-CUT SAWS

No. 7

10 feet 11.05 each 94 inches 8,30 8<u>‡</u> \$5.10 74 Width at centre.....

LANDER DE LA LAND LAND DE LA LANDRE AND LANDRE LAND

\$3.75 64 Width at centre.....

-Austranting resulting municipal and municipal and manifest of the second of the

11.05 each 9‡ inches Space of teeth, 6 feet to  $7\frac{1}{8}$  feet, 1 inch; 8 feet to 10 feet, 1 $\frac{1}{4}$  inches. Space between sections of teeth,  $\frac{2}{4}$  inches 8.30 8.30 6.80 8.48 6% 5.52 7<del>1</del> \$5.10 . 74 Width at centre.....

# CROSS-CUT SAWS No. 27, TASMANIAN TOOTH STRAIGHT BACK BLADE

5.62 Space of teeth, 14 inches from point to point; gullets 7 inch wide, 17 inches deep Width at centre, all lengths, 7 inches 4. 12 21.

6.00 each

No. 37, JARRAH TOOTH ROUND BACK BLADE Space of teeth, 1½ inches wide from point to point; gullets either ½ or § inch wide, 1½ inches deep \$3.00 64

Width at centre.....

# REPAIRING LONG SAWS

\$0.35 per foot .05 ". \$2.00 per saw .50 ... Gumming and hammering \$2.00 per saw Hammering \$5.00 per saw \$2.00 per saw \$5.00 per \$2.00 per \$2 Hammering Setting and sharpening Setting

When sending saws for repairs, always mark case plainly with name and address of owner for purpose of identification; ship to Tacony, Philadelphia Breakage in repairing at the owner's risk

#### CROSS-CUT HANDLES

#### No. 100 TRIUMPH

No. 100. Triumph. 12# inches long, 1# inches diameter at thickest part. Grey iron castings, malle-able iron bolt and nut.

No. 10255 CLIMAX PATTERN

No. 161 TRIUMPH Reversible

No. 101. Triumph Reversible. Same dimensions as No. 100.

#### No. 102 NEW CLIMAX



No. 102. Climax Rever-

sible. Same dimensions as No. 103, excepting small

grey iron casting at back.

No. 104 OREGON



No. 1021. Climax Reversible Handle. Dimensions same as No. 103, with

lighter weight grey iron castings, mal-leable iron bolt and nut.

No. 103 OLD CLIMAX





No. 103. Climax Reversible. 131 inches long, 11 inches diameter at thickest


part. Grey iron casting in front and back. Malleable iron bolt and nut.

No. 104. Oregon Climax. 14 inches long, 11 inches diameter at thickest part. Heavy grey iron castings, malleable iron bolt and nut.

No. 106. Loop handle, 101 inches long, 11 inches diameter. Malleable iron washer, loop rod and inside nut.

For Prices see Discount Sheet


#### **CROSS-CUT HANDLES**



No. 108. Loop handle, 101 inches long, from top of handle to bottom of washer, 11 inches diameter at thickest part. Maleable iron washer, ferrule, loop rod and inside nut.

No. 109. Loop handle, 103 inches long from top of handle to bottom of washer, 1 ½ inches diameter at thickest part. Maleable iron ferrule, washer, loop rod and inside nut.

No. 116. Plain, 123 inches long, 13 inches diameter.



No. 113. 141 inches long, 1,74 inches diameter, double grip, reversible, heavy malleable iron castings, loop rod.

For Prices see Discount Sheet

#### No. 119

13\frac{1}{2} inches long, 1\frac{1}{2} inches diameter at thickest part, heavy malleable iron castings, malleable iron bolt and nut.



#### **CROSS-CUT HANDLES**

#### SECTIONAL VIEW

No. 122

Heavy, malleable iron cap with

Long neck, tapped for Loop Rod.

Wood, thoroughly seasoned and well finished.

Heavy ferrule, malleable iron.

Anti-friction washer.

Loop rod, malleable iron, extra heavy and strong. Well-cut threads



This design eliminates the use of a nut at the back of handle, and provides a good, easy and comfortable grip for a direct thrust. Another new feature is the "Sprocket Nut" by means of which the handle is quickly and firmly attached to the saw.

No. 120. Made of selected, thoroughly seasoned hardwood, well finished. Length, 12 inches, diameter at thickest part, 12 inches. Extra heavy, best malleable iron castings, bolt and nut.

#### No. 122

It will be noticed that the cap is made with a long neck, tapped to fit the threaded end of loop tod. This rod extends through the handle, making the connection and line of pressite, when on saw, from top of handle to bottom edge of blade, thus insuring a strong, firm grip on saw, without possibility of lost motion or wobbling. 8 inches long, diameter,





11 inches.

Plain Per pair, 20c



Slot End Bolt and Lever Nut Per pair, 65c



Square Hole Per pair, 35c

Square Hole Key Wedge Per pair, 50c





No. 218. For saw 3½ feet and larger, 3 holes. No. 218A for saw 3 feet and smaller, 3 holes.

#### No. 118

Supplementary handle 54 inches long, 136 inches diameter, malleable iron ferrule, washer, rod and nut fastened inside.



For Prices See Discount Sheet

#### TOOLS FOR RE-FITTING DRAG SAWS



The No. 2 block is made of solid casting with removable steel anvil. Anvil has four different bevels for different patterns of saws; gauges are adjustable to the various widths of set required. Hand Saws, Crosscut Saws and Drag Saws can be set on this block.



#### SETTING HAMMER

A substantial hammer—steel head, hickory handle—special in form and weight for setting Drag Saws.



The No. 1 Block is made of a solid casting—Anvil has chilled face, insuring a good, hard surface; gauges are adjustable to the various widths of set required.

See discount sheet for prices

#### DISSTON IMPERIAL CROSS-CUT SAW TOOLS

THIS SET OF TOOLS INCLUDES A JOINTER, RAKER-TOOTH GAUGE SETTING BLOCK OR ANVIL AND SET GAUGE

We call special attention to the following points in the make-up of the IMPERIAL

The parts that rest and slide on the cutting teeth of the saw, while "cutting down raker," in all tools are subject to the greatest wear. In the IMPERIAL these parts are not only made of high-grade steel and specially hardened, giving



great durability, but are also easily detached by the mere loosening of a screw. This, while holding parts firmly, also permits of renewal when worn, thus prolonging efficiency of tool indefinitely, and overcoming a feature so objectionable in all other Cross-cut Saw Tools on the market.

The Raker Gauge is also made of steel and hardened to such a degree that

the best superfine file will not cut it.

Another important feature, found in no other Cross-cut Saw Tool, is the improvement in the screw adjustment to set the raker gauge, whereby the gauge can be adjusted to the smallest fractional part of an inch to obtain the particular length of raker desired. When adjusted and locked with the two lock-nuts on the lower end of raker gauge, the gauge cannot work loose and will remain in its position indefinitely, requiring readjustment only when a different length of raker is desired to suit the changes necessitated by the kind of timber to be cut. Notice the long bossed rib which forms a rest for the jointer file, and affords a firm bearing. The slight curve which is given to the file insures quick, direct action on the teeth

The material entering into the make-up of this Imperial Cross-cut Saw Tool is the best that can be procured for the purpose, the workmanship is most thorough, and we unhesitatingly pronounce it superior to any Cross-cut Saw Tool on the

market-one that fills a long-felt want.

Imperial Cross-cut Tools, complete. See discount sheet for prices.

Setting and Sharpening (or "Fitting") with the

### DISSTON IMPERIAL CROSS-CUT SAW TOOLS

To properly fit up a Crosscut Saw, it is necessary:

First—That the teeth be uniform in length. To accomplish this, place a file edgewise in the frame and secure it by thumbscrews. Pass the tool lightly over the teeth until file touches the shortest cutting tooth. See Fig. 1.



Fig. 1—JOINTING

Second --Where swaged rakers are used, the swaging should follow the jointing. The two points of the rakers are first filed to sharp edges without reducing

#### DISSTON IMPERIAL CROSS-CUT SAW TOOLS

their length, after which each raker point should be swaged or bent outward and downward by the use of the swaging hammer, as shown in Fig. 2, reducing the length of rakers from the to h of an inch, according to the kind of timber to be cut. The uniformity in the length of height of raker points can readily be gauged by the use of the graduated gauge as shown in Fig. 6. The faces of the gauge are marked from one to six, the gauge being held rigid by small roundhead screw; to adjust gauge loosen the screw and turn gauge so that face opposite number wanted projects above and parallel with steel plate, against which teeth of saw rest, then tighten screw. The points of rakers should just touch the face of gauge. Face marked (1) makes raker the of an inch shorter than cutting teeth; (2) \$\psi\_1\$; (3) \$\psi\_1\$; (4) \$\psi\_2\$; (5) \$\psi\_1\$; (6) \$\psi\_2\$.




Fig. 2-METHOD OF SWAGING RAKERS

Third—To "fit" the straight or unswaged raker—where preferred—place the gauge over the raker teeth, as shown in Fig. 3, adjust for length of raker re-

quired, and file them down. Then file to sharp edge.

Care should be taken to have the rakers shorter than the cutting teeth. It the rakers are too long they will not allow the cutting teeth to come in proper contact with the work and the saw will not cut freely. For the very hardest and driest woods the raker should be 743 part of an inch shorter than the cutting teeth. For hard green wood the




Fig. 3-FILING RAKER TOOTH

rakers should be 47 of an inch shorter than the cutting teeth, and graduated from 47 to 1/2 of an inch, according to conditions and timber when cutting softer wood.

Fourth—When filing, bring each tooth to a keen cutting edge, taking care not to reduce the length of the tooth any more than is necessary to remove the marks of jointing. The amount of bevel to the tooth should be determined by

#### DISSTON IMPERIAL CROSS-CUT SAW TOOLS

the class of timber to be cut. Hardwood requires less bevel than soft wood. Note particularly how the saw is filed when new and keep it as near that shape as possible.

Fifth—If a saw requires setting, lay the block or anvil, Fig. 4, on some convenient flat, solid surface and hold the saw so that the point of tooth projects over the beveled edge of anvil about one-quarter of an inch. Give two or three blows with a light hammer, striking the tooth always about one-quarter of an inch from point. It is very important that the "set" should be perfectly uniform, that is, exactly the same amount of set to all teeth. This can be regulated by the use of Set Gauge, Fig. 5.



FIG. 4-SETTING BLOCK

be regulated by the use of Set Gauge, Fig. 5. The amount of set required is largely determined by the kind of timber to be cut and the manner in which the saw is ground. The Disston Extra Thinback Saws when properly filed, do not require more than the part of an inch set to each side of the saw in general sawing, and can be run with less set in hard, firm-grained timber.






FIG. 5-SET GAUGE

Fig. 6-GRADUATED GAUGE





FOR CROSS-CUT SAWS

A light and convenient gauge for regulating the set on teeth of Cross-cut and One-man Saws.



UNIVERSAL CROSS-CUT SAW TOOLS

RAKER-TOOTH GAUGE

Includes Jointer, Raker-tooth Gauge, Setting Block or Anvil, Set Gauge and Side Dresser.


The same instructions given for the use of the Imperial Cross-cut Saw Tools apply to the Universal.

See discount sheet for prices


#### No. 1 SETTING HAMMER AND HAND ANVIL

FOR SETTING THE TEETH OF CROSS-CUT SAWS

High Grade Cross-cut Saws are necessarily made with a special temper for the purpose of holding their set and cutting-edges the longest possible time. Being so high in temper, it is almost an impossibility to set them with the old-fashioned lever spring-setting device, hence the demand for tools that will do the work properly and with the least trouble. This led to the method illustrated below:



which is so plain in its operation that it needs no explanation. These tools are the simplest and best on the market for setting Cross-cut Saws. Both the Hammer and Anvil are made of tool steel and fully guaranteed.



The Hammer is of a weight best adapted for the setting and swaging of saw teeth. The Anvil, octagon shape, is 1½ inches in diameter, 5 inches long, which gives the necessary body and weight. The faces are accurately machined to give them a good true bearing and proper angles to form the set, thus enabling the filer to adjust the set to the exact degree suitable for the character of timber to be cut, the setting being done while the saw is in the vise or filing clamp.

To secure the best results from Cross-cut Saws they must be properly set and sharpened, which can only be accomplished by an experienced filer supplied with proper tools. The Setting Hammer and Anvil herewith illustrated, in connection with our Imperial Cross-cut Saw Tools, are recommended as best for the purpose.

See Discount Sheet for Prices.

#### SAW-SETS

SPECIALLY ADAPTED FOR HAND SAWS, CROSS-CUT SAWS, CIRCULAR SAWS AND ALL SMALL SAWS



No. 2 (small) ... \$8.00 per dozen No. 12 (medium) ... 11.00 " " Packed one-half dozen in box Packed one in box Packed one in box



No. 8 (large), \$18.00 per doz.
No. 18 (med.). 15.00 " " For Circular and Cross-cut Saws, 12 Gauge and lighter. Packed one in box.
No. 28 (small). 11.00 " " For Hand Saws, Back Saws, Web Saws, Natrow Band Saws, etc. 10 points to the inch and coarser. Packed one-half dozen in box.
No. 280(small) 11.00 " " For Hand Saws, Butcher Saw Blades, etc., from 10 to 16 points. Packed one-half dozen in box.

The idea embodied in this Saw-set is one that will common distell to every user of a saw-setting road. The principal feature is the use of two plungers operated by the two levers or handles; pressure on the lower lever forcing plunger "D" against the body of the saw, thus holding it rigidly in position and preventing slipping, whilst a continuation of the pressure on the upper lever operates plunger "C" in setting the footh, it will perfectly set wide and heavy saws, it is also particularly adapted for narrow holds, such as web saw, narrow hand saws, etc. If the gauge "B" is properly adjusted, the result will be a suniformity of set that cannot be obtained by any other hand set.

Another immortant point a that the head of the third open, reading the operator to quickly adjust the Saw-set to Another immortant point a that the head of the The sauce "B" for reputating depth of at heat a wider beating than in most saw-set, thus soing away with the tendency to incline the tool to one idd or the other, which would give an uneven set to the treeth. The avail "E" is fatted with four the vecided surfaces, usuitable for the size cooth to be set is brought into position; hand of set-sectors. A". "Use care not too too deep's jin the body of the tooth, as if of the set should be in the point itself. Taking too deep a hold in lable to distort the body of the blade or break out the teeth. The top of plunger "C" should be on the with the carrier of the operator. If the instructions as to adjustment are carried out the results will be entirely satisfactory to the operator.

#### HAND-SAW JOINTER

SPECIALLY ADAPTED FOR HAND SAWS, NARROW BAND SAWS, ETC.



When the teeth of a saw become irregular in size it is absolutely necessary to dress them down until all are of an equal height, and this should always be done before attempting to reset or sharpen the saw. To facilitate this work and insure evenness we fully recommend the above Jointer, which is simple in construction and readily adjusted.

Price, complete with file....\$5.75 per dozen Extra Files......\$1.50 per dozen
Packed one-quarter dozen in box.


#### STAR SAW-SET

FOR HAND, BACK, BAND, WEB, WOOD AND SMALL CIRCULAR SAWS, NOT THICKER THAN 18 GAUGE

Prominent among the advantages claimed for this set is that it can be operated by the foot by means of a treadle, thus leaving the hands free to guide the

saw; or it can be used by striking on the

top with a light mallet. A is the plunger, which can be operated by a treadle attached to E, under the machine, and a slight tap with the foot will set the tooth; B, the hammer or striking part; C, the anvil; D, the movable gauge; F, the screw to regulate the amount of set. The striking part and the anvil, or portion which receives the blow, are star-shaped, and similar in construction. The points are all of different sizes, and are numbered from 1 to 6, and are designed to set different sized teeth. It will strike a blow as sharp and effective as though done by a hammer, and is the most useful and complete saw-set that has ever been offered. If the saw is hard, several blows should be given in setting it. Raise the back of the saw from the guide-screw F, when the first blow is given, and gradually lower it with each blow until the process is complete. With each set is included a gauge for holding narrow blades, such as Web saws, etc., in position during operation of setting.



ADJUSTABLE, No. 1 \$11.00 per Doz.

#### SAW CLAMPS

Adjustable, No. 1 Improved, No. 2

The Disston No. 1 Improved Ball and Socket Clamp is made of malle-able iron, japanned. Length of jaw, 9 inches. A lever tightener, pressed downward, causes the jaws to grip the blade firmly; the reverse movement releases it.

A ball and socket adjustment permits the clamp to be placed at any angle, and holds it rigidly in position. A thumb-screw device attaches clamp to bench.

The Disston No. 2 Improved Saw Clamp is made of malleable iron, japanned; the length of jaw is 91". It has a lever tightener so constructed that when pressing it downward the clamp grips the saw blade firmly; the

reverse movement releases it. The

clamp can be readily attached to a

IMPROVED. No. 2

\$9.00 per Doz.

\$11.00 per Doz. bench with the substantial thumb \$9.00 per Doz.

Screw, and it can be tilted forward or backward to any angle desired by turning a wing nut.



#### ADJUSTABLE, No. 4

Particularly adapted for use when filing narrow band, web saws, etc. The supporting arms are adjustable, and can be regulated to suit the various widths of saws to be filed, the blade being maintained in the same position throughout and by slightly raising lever, can be moved along.

No. 4. Japanned (length of jaw, 123 

#### REVOLVING SAW-SET



Packed one-half dozen in box

#### SAW CLAMPS

#### HANDY, No. 5



#### FASTENED TO BENCH BY SCREWS

Length over all, 143 inches. Filing length of jaw, 13 inches. Weight, 33 lbs.

The Disston No. 5 Handy Saw Clamp is made of grey iron, japanned. The arches of the frame are re-inforced, making it strong and rigid. An eccentric lever opens and closes the jaw. A three-point pressure device gives an even, firm grip on the blade the full length of the jaw.

#### HANDY, No. 6

Patented December 27, 1910



Same pattern and dimensions as No. 5 with the addition of screw lugs for fastening to bench. These lugs fold closely to body of clamp. Weight, 5 pounds, 9 ounces.

#### 

The Handy Saw Clamp was designed with the particular view of making it light in weight and at the same time strong and durable; to take up the least possible space and easily carried in a tool chest.

The material is grey iron, the arches are reinforced to give the requisite strength where needed. Tightened by means of the eccentric lever permits of quick and positive action. There being three points of pressure on the jaw, proper contact with the blade is obtained along the entire length without the use of rubber packing, which insures the holding of the saw-blade firmly and rigidly in position.

Packed one in pasteboard box


Trade Mark Registered U. S. Patent Office

# 13

#### SAW FILING GUIDE

Patented Dec. 12, 1893

ESPECIALLY DESIGNED TO ASSIST THOSE NOT SKILLED IN THE ART OF SAW-FILING TO FILE A SAW CORRECTLY



#### DIRECTIONS

This cut shows a saw and the guide in proper position for filing. There are three marks on the upper hub of the swivel attachment, and one mark on the other. One of the three marks shows when it is in position for one side and the other designates when it is in position for filing the other side. The third, or centre mark, shows when it is in position for filing Rip Saws. To obtain the correct position loosen the wing-nut and move the guide around to the point desired; after tightening wing-nut, loosen screw in file handle and adjust the file for the shape of tooth wanted.

A good way is to select a tooth of correct shape and let file down into it, tighten set-screw in handle, then file a tooth to see if the shape suits. If not, turn the file a little to the right or left and try another tooth until the proper shape is obtained. Then file every other tooth. When one side is filed, reverse saw and attachment and file the other teeth. For Rip Saws, place the file at right angles with the saw, as mentioned above, and file every tooth. Always keep the file as nearly horizontal as possible. USE A 5½-INCH DISSTON SLIM TAPER FILE.

Length of jaw, 12½ inches. Price includes Clamp, Filing Guide, File and Handle.

Packed one in wooden box, weight 20 pounds

Trade Mark Registered U. S. Patent Office

# P

#### SAW FILING GUIDE

Patented December 12, 1893.



Packed one in pasteboard box. Weight, 7 pounds each. Where a heavier and stronger clamp is wanted, we recommend the D3.

#### STANDARD WIRE GAUGE, No. 5



**No. 5.** 1 to 26.....\$32.00 per dozen

Packed half-dozen in box.

#### DISSTON STANDARD WIRE GAUGES


PERFECTION ATTAINED

ACCURACY GUARANTEED



No. 1. Small Gauges, 1 to 26

.\$20.00 per dozen



No. 2. Large Gauges, 0 to 29.

.\$35.00 per dozen



To insure perfect accuracy, it is absolutely requisite that our gauge and that of our customers should be alike, and to this end we have been compelled to enter the field in this delicate branch of manufacture. Our success is complete, and we are making a correct standard gauge, which we warrant, and sell at a low price.

ALL GAUGES MADE TO STUBB'S OR BIRMINGHAM STANDARD

Packed half-dozen in box

#### CABINET PATTERN WEBS



Length	Thickness	₩ to ¼ Wide	74 to 114 Wide	1 1/4 to 1 1/4 Wide	156 to 2	in. Wide
18 inch	23 gauge	\$4.20	<b>\$4</b> .80	\$5.20	\$5.80 pc	er dozer
20"	23 "	4.40	5.00	5.40	6.00	"
22 "	23 "	4.60	5.20	5.60	6.40	"
24 "	23 "	4.80	5.40	5.80	6.80	44
26 "	23 "	5.10	5.80	6.20	7.20	**
28"	23 "	5.40	6.20	6.60	7.60	**
30"	23 "	5.80	6.60	7.20	8.20	**
32 "	22 "	6.20	7.00	7.80	8.80	"
34 "	22 "	6.60	7.40	8.40	9.40	"
36 "	22 "	7 00	7 80	9.00	10.00	44

All above Webs are set and sharpened

#### CABINET PATTERN WEBS EXTRA THIN BACK

Length	Thickness on Toothed Edge	Thickness on Back Edge	% to ⅓ Wide	1/2 to 11/2 Wide	11 ( to 112 Wide	134 to 2 in. Wide
18 inch	23 gauge	25 gauge	\$5.00	\$5.60	\$6.00	\$6.60 per dozen
20 "	23 "."	25 ຶ "ຶ	5.20	5.80	6.20	6.80 "
22 "	23 "	25 "	5.40	6.00	6.40	7.20
24 "	23 "	25 "	5.60	6.20	6.60	7.60 "
26 "	23 "	25 "	5.90	6.60	7.00	8.00 "
28 "	23 "	25 "	6.20	7.00	7.40	8.40 "
30 "	23 "	25 "	6.60	7.40	8.00	9.00 "
32 "	22 "	24 "	7.00	7.80	8.60	9.60 "
34 "	22 "	24 "	7.40	8.20	9.20	10.20 "
36 "	22 "	24 "	7.80	8.60	9.80	10.80 "

All above Webs are set and sharpened

Five per cent. extra for each gauge heavier than the above.

Five per cent. extra for each gauge lighter than the above. Twenty per cent. extra for Webs toothed over 10 points per inch.

Twenty-five per cent. extra for Webs toothed over 15 points per inch.

Cabinet Webs heavier than 20 gauge special price.

Cabinet Webs lighter than 25 gauge special price. Webs with cut tangs, advance 55c. per dozen on above prices.

Webs with tangs "riveted" on, advance 80c. per dozen on above prices.

Webs with cross-cut saw tabs "riveted" on, advance \$1.30 per doz. on above prices.

Specify whether "cut" or "riveted" tangs are wanted, otherwise cut tangs will be sent.

Webs for Cabinet Frames are six inches longer than size of frame, there being a cut tang of three inches on each end; i. e., a 20-inch Cabinet Frame will take a 20-inch Cabinet Web with three-inch cut tang on each end.

#### TURNING OR CHAIR WEBS

SET AND SHARPENED READY FOR USE


	tick					******				37	
·	Jev.			DIS	STON						1
Length Inch	Gauge	Price Per Doz.	Widths	₩Ain	34 In.	}≨ [n.	Number ½ In.	Points to	Inch ¼ In.	34 In.	1 In
6 7 8	23 22 22	\$2.40 2.50 2.60	$\frac{3}{16}$ to $\frac{1}{4}$ $\frac{3}{16}$ " $\frac{1}{4}$ $\frac{3}{16}$ " $\frac{1}{4}$	10 10 10	9 9 9	$7\frac{1}{2}$ $7\frac{1}{2}$ $7\frac{1}{2}$	7 7 7	•••	••	••	••
10 12 14	22 21 21	2.80 3.00 3.20	3 " 1 3 " 5 16 16 3 " 5 16 16	10 10 10	9 9 8	7½ 7½ 7½ 7½	7 7 7	•			• • • • • • • • • • • • • • • • • • • •
16 18 20	20 20 20	3.60 4.00 4.50	1 " 3 4 " 1 1 " 1 1 " 5 4 " 8	10 10 10	8 8 8	$7\frac{1}{2}$ $7\frac{1}{2}$ $7\frac{1}{2}$	7 7 7	•••	•••	•••	•
22 24 26	20 19 19	5.00 5.60 6.20	1 " 5 4 " 8 1 " 3 4 " 3 4 " 4		8 8 8	$7\frac{1}{2}$ $7\frac{1}{2}$ $7\frac{1}{2}$	7 7 7	$6\frac{1}{2}$ $6\frac{1}{2}$ $6\frac{1}{2}$	6 6 6	5½ 5½ 5½	•••
28 30 32	19 19 18	6.90 7.60 8.40	1 " 7 4 " 1 1 " 1		8 8 8	7½ 7½ 7½ 7½	7 7 7	$6\frac{1}{2}$ $6\frac{1}{2}$ $6\frac{1}{2}$	6 6 6	51 51 51	· 5 5
34 36	18 18	9.20 10.00	1 " 1 1 " 1		8	7½ 7½ 7½	7	$\frac{6\frac{1}{2}}{6\frac{1}{2}}$	6	5½ 5½	 5 <b>5</b>

One gauge heavier than above list, no extra charge.

When two gauges heavier than above list, Felloe Web prices will be charged. Extra width, 10 per cent. additional for each \( \frac{1}{2} \) inch.

With pins, 85c per dozen additional, list.

#### FAY'S PATENT SCROLL SAWS



\$3.60	4.00	10 4 . 40	4.80	5.20	13 incher 5.60 per dozen
14 \$6.00	16 6.60	18 7.20	7.80	8.60	24 inches 9.60 per dozer

Fay Webs to 16 inches, over 4 inch wide, and from 18 to 24 inches, over 1 inch wide, extra price.

Fay Webs made from 13 to 16 gauge in thickness.

#### FELLOE WEBS

SET AND SHARPENED READY FOR USE

	**************************************	111714177	177711111	71112011201	79333
-1. 2000 Miles		atta a aleenaa aa	and the second second	egenne a segenne an a sa	and the second second

Length		Price					er Points				
Inch	Gauge	Per Doz.	Widths	#arik In.	⅓ In.	36 In.	⅓ ln.	∮≨ ln.	⅓ In.	34 In.	1 In.
6	19	\$2.60	3 to 1/2	9	8	$6\frac{1}{2}$	6				
7	19	2.80	$\frac{3}{16}$ " $\frac{1}{2}$	9	8	$6\frac{1}{2}$	6				
8	19	3.00	$\frac{3}{16}$ " $\frac{1}{2}$	9	8	$6\frac{1}{2}$	6				
10	18	3.40	3 " 1 16 2	9	8	61/2	6				
12	18	3.80	1 " 1	9	8	6 <u>‡</u>	6				
14	17	4.20	1 " 1	9	7	$6\frac{1}{2}$	6				
16	17	4.80	1 " 1	9	7	61/2	6				
18	17	5.40	1 " 5	9	7	61	6				
20	17	6.00	i " i	9	7	6 <del>1</del>	6				
22	17	6.60	1 " 1		7	6 <del>1</del>	6	51	5	41/2	
24	17	7.40	1 " 7		7	61	6	51/2	5	41/2	
26	17	8.20	i " i		7	$6\frac{1}{2}$	6	5 <u>1</u>	5	$4\frac{1}{2}$	
28	17	9.00	1 " 1		7	6 <del>1</del>	6	51	5	41/2	
30	16	9.80	i " 1		7	$6\frac{1}{2}$	6	5 <del>1</del>	5	41/2	4
32	16	10.80	į " 1		7	6 <del>1</del>	6	51/2	5	$4\frac{1}{2}$	4
34	16	11.80	1 " 1		7	6 <del>1</del>	6	51/2	5	41	4
36	16	12.80	į " 1		7	61	6	5	5	41/2	4

This list is for saws ground three gauges thin on back.

One gauge heavier than above list, no extra charge.

Five per cent. extra for each additional gauge to 14 gauge; above 14 gauge, special prices. Extra width, 10 per cent. for each & inch.

All Web saws & inch and narrower will be made with wide ends to give strengh at hole; price 25% advance; with pins 85 cents per dozen additional, list.

#### CANADIAN WEB SAWS

REGULAR STOCK 20 GAUGE



Blades 36 inches in length and under made with regular wood-saw peg teeth. Blades over 36 inches in length made peg teeth with square gullets.

Prices on above saws furnished upon application

#### GIN ROLLER BLADES

42 i	nche	s x 31	in.	wide	x	18	in.	thick,	<u>5</u>	in.	straigh	t bevel	 \$32.00	per dozer
54	"	x 4	"	"	x	16	"	"	7 6 T 6	"	"	"	 36.00	• "
60	"	x 4	"	"	x	32	**	"	.9	"	"	44	 46.00	"
72	"	x 4½	"	"	x	32	"	"	5.	"	"	"	 60.00	"

If concave bevel, add 25 per cent. to the above list

Prices for sizes other than the above will be furnished upon application

#### DOCTOR BLADES

OR CALICO-PRINTERS' WEBS

ו ככ	inch	es x 2½	inche	s x 19 to 24	gauge\$6.75	per dozer
36	"	x 2½	"	x 19 " 24		. "
42	"	x 21/2	**	x 19 " 24	" 8.50	"
44	"	x 2½	"	x 19 " 24		"
46	."	x 21	"	x 19 " 24	" 9.50	"
48	"	$x 2\frac{1}{2}$	"	x 19 " 24	"10.00	"
			For e	each additio	nal inch in length, 5 per cent. extra	
33 i	inche	s x 3	inche	s x 19 to 24	gauge\$7.75	per dozen
36	"	x 3	"	x 19 " 24	" 8.50	"
42	"	x 3	"	x 19 " 24	"10.00	"
44	"	x 3	"	x 19 " 24	"10.50	"
46	"	x 3	"	x 19 " 24	"11.00	"
48	"	x 3	"	x 19 " 24	"11.75	"
			For e	each additio	nal inch in length, 5 per cent. extra	
33 i	nche	s x 3½	inche	s x 19 to 24	gauge\$8.75	per dozen
36	"	$x 3\frac{1}{2}$	"	x 19 " 24	" 9.50	"
12	"	x 3½	"	x 19 " 24	"11.00	• •
11	"	$x 3\frac{1}{2}$	"	x 19 " 24	"11.75	"
16	"	x 3½	"	x 19 " 24	"12.50	"
	"	x 3 }	"	x 19 " 24	<b>"</b>	"

For each gauge heavier, 5 per cent. extra

#### HENRY DISSTON

ORIGINATED AND PATENTED THE

#### SKEWBACK HANDSAW

JUNE 23, 1874



REG.U.S.PAT.OFF M DE F M.IND.RGTRADA

(THE ONLY ORIGINAL BRAND THEN AND NOW)

#### DISSTON HAND SAWS

are manufactured throughout at the Disston Works. The steel, high-grade Crucible Steel, is made in the Disston Steel Works after a formula demonstrated by years of experience to be particularly adapted for Hand Saws; the blades, properly shaped, are hardened and tempered under the exclusive Disston processes; accurately ground by the special Disston method, insuring uniformity, giving an even thickness along the entire tooth-edge, tapering thinner to the back and from handle to point, requiring very little set to the teeth for clearance of the body of blade in the cut, thus making a narrow kerf and easy running; accurately tensioned for true cutting, the teeth of right shape, evenly set and sharpened for fast, smooth work; while the handles, made of selected lumber, long and well-seasoned, are symmetrical in all proportions, formed with a comfortable handhold and each securely fastened on its blade in such a position as to give the correct "hang" or pitch to the saw when entering the work, making it feel light and well balanced, feeding into the wood with the least exertion.

These are the points of merit by which Disston Saws have earned and maintained long-continued supremacy for high Quality, excellence of Workmanship and greatest Efficiency.

The Brand *Disston* is reserved exclusively for the high-grade goods which are never sent out under any other brand.

SAWS AND TOOLS BEARING THE BRAND "DISSTON" CARRY A FULL GUARANTEE

# ORDER ALL HAND SAWS BY THE NUMBER OF POINTS TO THE INCH

The following cuts are full size of the respective number of teeth and points per inch which they represent. It will be noticed that in one inch space, there is one tooth less than there are points.

Rip Saw Teeth six points and coarser are graduated from butt to point of blade, the narrow end being one point to the inch finer than at butt; the "points" being measured at butt of blade.

#### CROSS-CUT TEETH

11 POINTS

10 POINTS

9 POINTS

• POINTS







#### RIP TEETH



#### HENRY DISSTON & SONS

In determining what point of saw will best answer your requirements, remember that a saw with a few tooth-points to the inch (say 6 or 7) will cut fast and make a comparatively rough or coarse cut. These points are commonly used for ordinary construction work and similar rough sawing. The saws with many tooth-points to the inch (10 or 11) will make smooth, even cuts and are used mostly for interior finishing, furniture making, etc.

The degree of seasoning in the wood to be cut must be considered also, in determining what point to use. Green, wet wood requires a coarse saw (few points to the inch) while a fine tooth-point saw can be used to advantage in dry, seasoned lumber.

Hand saws for cross-cutting are made in sizes varying from 5 to 11 toothpoints to the inch. The 7, 8 or 9 point saws, which are medium, are in greatest demand and are most satisfactory for ordinary work.

In measuring the number of teeth in a saw, the cutting edge is measured from point of tooth to point of tooth and we speak of the saw as having so many "points to the inch"—meaning so many tooth-points to the inch. See illustration of "points" to inch on opposite page.

In rip saws for ordinary work, 5, 5½ or 6 points to the inch are the standard sizes and from this basis they are purchased with fewer points when fast, rough cutting is desired and with more points when careful, accurate cutting is necessary.

Length of Saw to be Used. The length of a rip or cross-cut hand saw is always measured by the length of the cutting edge. For instance, a 26-inch saw means a saw measuring 26 inches long on the cutting edge of the blade. There seems to be a general impression among the inexperienced that all hand saws for cross-cutting are 26 inches long and all rip saws 28 inches long. This is not a fact. Both cross-cut and rip saws are made in a variety of lengths, as the following pages will show. The terms "cross-cut" and "rip" refer to the shape and style of the teeth only and not to the length of the saw.

The Difference Between Cross-cut and Rip Saws. Hand saws are divided into two main classes—the cross-cut saw for cutting across the grain of the wood and the rip saw for ripping or cutting with the grain. The difference between these two classes of hand saws is in the shape of the teeth; one being designed to cut across the grain with an action similar to a number of small knife blades, and the other for ripping apart when cutting parallel to the grain with an action like that of many chisels.

The Difference Between Skew-Back and Straight-Back Saws. The terms skew-back and straight-back refer entirely to the shape of the back of the blade. The skew-back blade is cut on a curved line at the back as is illustrated in the D-8 saw, page 134, while the straight-back blade, as the name implies, is cut on a straight line from butt to point. The advantage of one over the other is almost entirely a matter of personal preference. The skew-back blade is slightly lighter in weight. A straight-back gives the blade more "body" or stiffness. Therefore, men who use an especially heavy thrust pressure sometimes prefer the straight-back saw.

WARRANTED EXTRA REFINED LONDON SPRING STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS ade Mark Registered U. S. Patent Office



This is the latest and finest Handsaw ever made. Genuine Rosewood handle, carved and polished. The blade is Disson Skewback design, exceptionally high finish, made from Disson Highest quality Crucible Steel, and fastened in the handle with nickle-plated screws. Our many years' experience and wide knowledge in the making of a perfect saw steel has enabled us to produce a blade for this saw that cannot be duplicated elsewhere. Packed one in Special Box.

Manufactured only in the following lengths and points:

Cross Cut												10,	11	points,	\$30.00	рег	dozer
	22	. "	 	 	 	 	 	 ٠.				10,	11		32.00	***	**
	24	. "	 		 	 	 	 			9.	10,	11	44	34.00	"	"
	2€	<b>,</b> "		 		 	 	 . :	7.	8.	9.	10,	. 11	44	36.00	"	*
Rip	26	"		 	 	 	 	 			5,	51,	6	66	36.00	34	"

D15 same as D-115, except straight back. Manufactured only in the following lengths and points:

Cross Cut	24 inch	nes	 	 	 	 		8,	9,	10	points,	\$34.00	per	dozer
	26- "	4	 	 	 	 	. 7,	8, 9,	10,	. 11		36.00		44
Rip	26 '	•	 	 	 	 			. 5	, 6	"	36.00 36.00	"	46

No. 120



Acme Skewback, Extra Refined London Spring Steel, Selected and Highly Polished Blade, Warranted, Apple Handle, Carved and Polished, Brass Screws.

Manufactured only in the following lengths and points:

		,,,,	****		 ,,,,,	 • ••	 ٠.,	•••	•••	•••	r	٠.,	•••	••								
Cross	Cut	20	inche	s.,	 		 									. 10	),	11	points,	\$26.00	per	dozen
		22	"		 		 				٠.		. :			. 10	),	11	- 44	29.00	"	**
		24			 		 				٠.				9,	. 10	),	11	**	31.00	"	"
		26		٠.	 	 	 					'	7,	8,	9,	10	),	11	44	32.00	"	"
	Rip	26	. "		 	 	 						٠.	ď	5.	. 5	١.	6	**	32.00	"	44
	•	28	- 44		 	 	 								5,	5	i,	6	"	36.00	44	"

NOTE: A fast, smooth-cutting saw; particularly adapted for fine cabinet work, sawing mitres, and in all instances where rapid, smooth cutting is required. It will cut a joint sufficiently smooth to flue without planing. In sharpening, care must be used to file the teeth at the same angle as they leave the factory. These saws are warranted to run without set in dry, seasoned lumber only, and are leave the factory. These saws are warranted to run without set in dry, seasoned lumber on not for general use. They are high in temper, specially ground for clearance and require no set.

Thumbhole in handle of 28-inch

To properly file the No. 120 saw, a DISSTON SIX-INCH CANT SAFE BACK FILE, made expressly for this purpose, should be used.

> For number of screws in Disston Saws, see page 163 Packed one-third dozen in box

WARRANTED EXTRA REFINED LONDON SPRING STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS



Skewback, Extra Refined London Spring Steel, Selected and Highly Polished Blade, Warranted, Apple Handle, Carved and Polished, Brass Screws.

Manufactured only in the following lengths and points:

Cross Cut	20	inche	<b>s</b>	 	 	 	 	 .:			 	 		10,	11	points	\$24.00	per	dozen	
	22	**		 	 	 	 	 	٠.	٠.	 	 		.9,	10	• • •	26.00	**	"	
	24	46		 	 	 	 	 ٠	٠.		 	 	8.	9.	10	44	28.00	"	**	
	26															"	30.00	"	44	
Rip	26	**		 	 	 	 	 			 	 	5.	54	. 6	46	30.00	"	44	
	28	"		 	 	 	 	 			 	 ٠.	. 5,	5 1	6	44	34.00	"	44	



Extra Refined London Spring Steel, Selected and Highly Polished Blade, Warranted, Apple Handle, Carved and Polished, Brass Screws.

Manufactured only in the following lengths and points:

Cross Cut	18	inche	es .		 	 	 	 		 	 	 					10,	11	poin	ts	\$20.75	per	dozen
	20	*					 	 		 	 ٠.	 		. 8	. :	Э.	10.	11	**		23.00	"	66
	22	4		٠.			 	 		 	 	 	٠.	. 8	. :	9.	10.	11	**		25.00	"	44
	24	"		٠.			 	 		 	 	 	. 7	. 8		9.	10.	11	"		27.00	**	44
	26	44		٠.			 	 ٠.		 	 	 6	. 7	. 8		9.	10.	11	"		29.00	"	"
	28	ü.	٠.				 	 		 	 	 		5		6.	7.	8	"		33.00	*	44
Rip	24	"			 	 	 	 		 	 	 		. 5		5 i.	6.	7	"		27.00	"	4
-	26	**					 	 	٠.	 	 	 		. 5		5 i.	6.	7			29.00	"	*
	28	44															ςi	. 6	"		33.00	**	44

For number of screws in Disston Saws, see page 163

WARRANTED EXTRA LONDON SPRING STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS



Refined Crucible Steel, Grained Blade, Warranted, Close-up Apple Handle, Carved and Polished, Brass Screws.

Manufactured only in the following lengths and points:

Cross Cut	20	inche	s	 		 				.9,	10,	11	points,	\$18.00	per	dozen
	22	4		 ٠.		 			. 8	, 9	10,	11	**	20.00	"	"
	24	"		 		 		. ל	. 8	, 9,	10,	11	**	21.50	"	"
	26	**		 		 	٠.	. 6	, 7	, 8,	9,	10	"	22.50	u	"
Rip	26	"		 	. <b>.</b> .	 				. 5,	5	. 6	"	22.50	"	"
	28	"								5	51	٠,	44	25 50	"	**

Trade Mark Registered



Patent applied for





Skewback, Refined Crucible Steel Blade, Warranted. Hardwood Handle, full Polished, Brass Screws. The combination of teeth in this saw, alternate sections of five regular cross-cutting teeth and two ripping teeth, separated by numerous deep gullets for full clearance, insures free running, easy, very rapid and clean cutting in heavy work, whether cross-cutting or ripping, and especially for sawing diagonally across the grain, as its name implies.

This saw is particularly adapted for general construction work of all kinds; studding-up houses, shoring for sewers, making forms for concrete buildings, railroad work, millwright,

farm use, etc.
The Disston Double Duty Saw far excels any other pattern of saw ever made for like utility, and is easily kept in order.

Enlarged sections of teeth



D17. Skewback made in 26-inch length only. \$25.00 per dozen

For number of screws in Disston Saws, see page 163

WARRANTED REFINED CRUCIBLE STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS

Refined Crucible Steel, Highly Polished Blade, Warranted, Apple Handle, Carved and Polished, Brass Screws.



26-inch Blade, 61 inches wide at butt, 12 inches at point

Manufactured only in the following lengths and points:

Cross Cut	24 i	nche	s	8, 9,	10,	11 p	oints,	\$23.50 per	dozen
	26	"		. 7, 8, 9,	10,	11	"	25.00 "	**
Rip	26	"		5,	. 51	, 6	"	25.00 "	ш

The D-20 saw is made particularly for those who prefer a narrow width blade. This blade, skew-back in design, is 1½ inches wide at the point and 6½ inches at the butt instead of 2½ inches at the point and 6½ inches at the butt as in full width saws. This makes the D-20 a very light and easy saw to operate. This feature, together with the comfortable grip, makes the D-20 a favorite with some users.



26-inch Blade, 61 inches wide at butt, 11 inches at point Same as D-20, except straight back.

Manufactured only in the following lengths and points:

Cross Cut	24 ir	ıche	s	8, 9	, 10,	11	points,	\$23.50	per	dozen
	26	**		7, 8, 9	, 10,	11	"	25.00	"	a
Rin	26	"			5 51	6	44	25.00	"	**

For number of screws in Disston Saws, see page 163

WARRANTED REFINED CRUCIBLE STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS



This is the original Skewback Saw, and has proved to be the most popular saw in the world. Skewback, Refined Crucible Steel blade, Warranted; Apple handle, full Polished, Brass screws.

These Saws have all the latest improvements in hand saws, and are warranted superior. They combine the popular "Skewback," the peculiar shaped but to rheel which, with the new screws, make it almost impossible to work loose from the handle, and gives the full sweep of the Saw without the possibility of catching in the work. This saw was originated and patented by HENRY DISSTON in 1874.

Thus hadden to be madden to the control of the same that 
Thumb-hole in handle of 26" rip, and larger; also in 28" hand.

Manufactured only in the following lengths and points:

Cross Cut	16	inche	es	 	 		 		 				 			. ,		9,	10	points,	\$14.75	рег	dozen
	18	**		 	 	 							 	 		. 9		10,	11	"	16.25	·u	**
	20	**		 	 	 	 	٠.					 		. 8.	9		10.	11	"	18.00	44	64
	22	61		 	 	 			 				 	 	. 8,	9		10,	11	**	20.00	"	**
	24	**																		**	21.50	4.	**
	26	44		 	 	 			5,	5	à.	6	6	7.	8.	9		10.	11	**	22.50	**	64
	28	**																	8	"	25.50	**	и,
Rip	20	"		 	 	 			 	٠.				 					. 7	"	18.00	**	**
	22	**		 	 	 			 				 	 					. 7	"	20.00	"	44
	24	44		 	 ٠.	 									5.	5	ł.	6.	7	"	21.50	**	44
	26	**																	. 6	4:	22.50	**	44
	28	"															,	5 }	, 6	"	25.50	u	"



Skewback, Refined Crucible Steel, Highly Polished Blade, Warranted, Apple Handle, Carved and Polished, Brass Screws.

Thumb-hole in 26" rlp. and larger.

Manufactured only in the following lengths and points:

Cross Cut	20 ir	ich <del>e</del>	 11	points,	\$20.00	рег -	dozen
•					22.00	4	**
	24	44	 11	**	23.50		
				"	25.00		
Rip					25.00		
	28				28.00	٠.	**

For number of screws in Disston Saws, see page 163

WARRANTED EXTRA REFINED LONDON SPRING STEEL, PATENT GROUND AND TEMPERED. HAND. PANEL AND RIP SAWS

CENTENNIAL, No. 76



No. 76, Centennial. Skewback, Crucible Steel Blade, Warranted, Apple Handle, Polished, Brass Screws.

Manufactured only in the following length and points:

#### THE ORIGINAL HENRY DISSTON SAW



Crucible Steel, Grained Blade, Warranted, Beech Handle, full Polished, Brass Screws.

Manufactured only in the following lengths and points:

INCHES	CROSS CUT	PER DOZEN	INCHES	RIP	Per Dozen
16	9, 10	points, \$13.00		7	
18	9, 10, 11	" 14.00	22	54, 6, 7	" 18.00
20	8, 9, 10, 11	" 16.00		$\dots$ 5, 51, 6, 7	
	8, 9, 10, 11		26	$\dots$ 5, 51, 6, 7	" 20.00
			28	$\dots$ 4, $4\frac{1}{2}$ , 5, $5\frac{1}{4}$	" 23.50
	51, 6, 61, 7, 8, 9, 10				
	5. 6. 7. 8				

Packed one-third dozen in box

#### AMERICAN BOY





The "American Boy" Saw is packed in an unusual box (each saw in an individual package), that adds much to its attractiveness.

The blade is made of the famous Disston-made Steel. The handle is of nicely carved and and polished hardwood, fastened to the blade with three brass screws.

Made either straight or skewback.

.......9 points.

For number of screws in Disston Saws, see page 163.

#### HAND SAWS

WARRANTED CRUCIBLE STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS

Grained Blade, Beech Handle, Polished Edge, Brass Screws



14 16 18 20 22 24 26 28 <sup>50</sup> inches \$7.25 8.25 9.25 10.50 11.50 12.50 13.50 16.50 19.50 per dozen Trade Mark Registered

U S. Patent Office



14 16 18 20 22 24 26 28 50 inches 86.50 7.50 8.00 9.00 10.00 11.00 12.00 14.00 16.00 per dozen

Trade Mark Registered U. S. Patent Office



12 14 16 18 20 22 24 26 28 30 inches \$5.75 6.25 6.75 7.50 8.00 8.75 9.50 10.00 11.00 12.00 per dozen

Trade Mark Registered U. S. Patent Office



\$\frac{12}{\$\\$4.50}\$ \ \frac{14}{5.00}\$ \ \frac{16}{5.50}\$ \ \frac{18}{6.00}\$ \ \frac{20}{6.700}\$ \ \ \frac{22}{7.50}\$ \ \ \frac{24}{5.00}\$ \ \ \frac{25}{5.00}\$ \ \ \frac{25}{5.00}\$ \ \ \frac{30}{5.00}\$ \ \ \frac{100}{5.00}\$ \ \ \frac{25}{7.00}\$ \ \ \frac{25}{7.50}\$ \ \ \frac{8.00}{9.00}\$ \ \ \frac{9.00}{10.00}\$ \ \text{por dozen} \end{per dozen}

For number of screws in saws, see page 163

Packed one-third dozen in box

WARRANTED REFINED CRUCIBLE STEEL, PATENT GROUND AND TEMPERED, HAND, PANEL AND RIP SAWS

No. 107





Crucible Steel, Grained Blade, Warranted, Beech Handle, Polished Edge, Brass Screws. Equal to any saw manufactured that is not branded "Disston."

14 16 18 20 22 24 26 28 30 inches \$10.25 11.25 12.50 14.00 15.50 16.50 17.50 20.50 23.50 per doz.



This Gauge can be placed on any DISSTON SAW at an advance of \$5.00 per dozen.

#### REMOVABLE-BACK SAW



This saw can be used with equal facility for either Hand or Back Saw. When the back, A, is removed the saw can be used as a Hand Saw. Replace the back and a first-class Back Saw is the result. Same quality as Dissrow, No. 7.

16 18 20 22 24 26 inches \$16,75 18.00 20.00 22.50 24.00 25.00 per dozen

This Back can be placed on any STRAIGHT-BACK DISSTON SAW at an advance of \$5.00 per dozen for all lengths.

Made with Cross-cut or Rip Teeth at same price For number of screws in Disston Saws, see page 163.

#### WARRANTED EXTRA REPINED LONDON SPRING STEEL, PATENT GROUND AND TEMPERED. HAND. PANEL AND RIP SAWS

Regular Hand Saws made in ship patterns as follows:



#### No. 7 SHIP PATTERN SAW

#### D-8 SHIP PATTERN SAW

#### No. 12 SHIP PATTERN SAW

#### No. 16 SHIP PATTERN SAW




#### D-100 SHIP PATTERN SAW

Same as D-100, except made with narrow blade-6" at butt; 11/2" at point.


These saws are also suitable for cabinet-makers, pattern-makers and work where a narrow saw is desirable.

For number of screws in Disaton Saws, see page 163

#### HENRY DISSTON & SONS

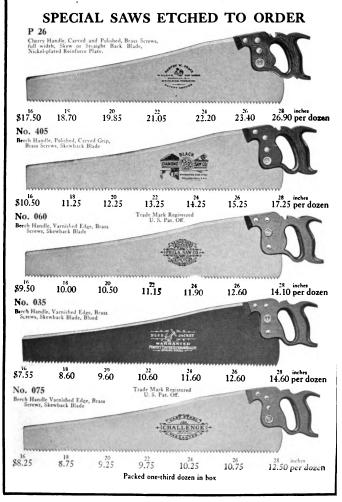

#### SPECIAL SAWS ETCHED TO ORDER

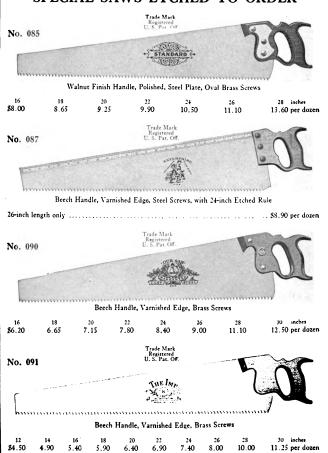

Packed one-half dozen in box

#### HENRY DISSTON SONS &



Cherry Handle, Carved and Polished, adjustable to various positions. This Saw has been especially designed to fill the need of a tool by which the Mechanic can cut out any particular section of floor, partition or ceiling to any depth desired without the necessity of boring holes, chiseling, etc. Sections cut out with this saw can be replaced in original position if desired. The foliate in the section of the sectio

D-19 Flooring, 16 inch, \$19.00




Cherry Handle, Carved and Polished, adjustable to various positions. Made particularly for use on work encountered by mechanics in making repairs where it is necessary to cut through joists, rafters, flooring, etc., in which nails may be embedded. Also for cutting soil pipe, gas pipe, etc. 20 17.25 24 16 18 22 ...\$14.50 15.50 19.00 20.75 per dozen No. 10 Plumbers'..... Packed one-half dozen in box

#### PLUMBERS' SAW, No. 5



Specially adapted for the use of MECHANICS. The Cherry Handle is adjustable to various positions. The coarse teeth are for sawing wood. The fine teeth for sawing wood in which nails are imbedded, lead pipe, etc. 20 18 22 inches No. 5 Plumbers'.... 18.25 21.00 per dozen



No. 6 Plumbers'..... Packed one-third dozen in box

#### MITRE-BOX SAWS

Made in Disston Quality only, their accuracy and efficiency is recognized as The Standard by the prominent manufacturers of Mitre Boxes.

#### DISSTON MITRE-BOX SAW, No. 4

H. DISSTON & SONS



Crucible Steel Blade, Apple Handle, Polished Edge, Brass Screws, Blued Back. The following prices are for saws measured the full length of the blade. The peculiar shape of butt or heel in these saws makes the toothed edge about 2 inches shorter than the full length of the blade. Mitre-Box Saws are regularly made 11 points to the inch, 19 gauge in thickness.

		•						4		5		6	inches	under ba	ck
20	inche	es	 	 		 	 . \$	24.00					pe	r doze	n
22	**		 	 	 	 	 Ċ	26.00	\$28	3.50	831	l.	00'	"	
24	44							28.00	31	1.00	34	1.	00	**	
26	44							30.00	33	3.50	37		00	**	
28	"							32.00	36	5.00	40	).(	00	66	
30	44							34.00	38	3.50	43		00	61	
32	"							36.00	41	.00	46	. (	00	"	

#### BACK SAWS

CRUCIBLE STEEL

#### DISSTON BACK SAW, No. 4

Made with Rip Teeth when specially ordered at the same price



No. 4. Apple Handle, Polished Edge, Brass Screws, Blued Back.

8 10 12 14 16 18 inches \$13.00 14.00 16.00 18.00 20.00 22.00 per dozen

No. 5. With Solid Brass Back.

8 10 12 14 16 18 inches \$18.00 19.00 21.00 23.00 26.00 30.00 per dozen

No. 7. With Polished Steel Back.

\$14.00 15.00 17.00 19.00 21.00 23.00 per dozen

## BACK SAWS

CRUCIBLE STEEL

"MECHANICS' OWN" BACK SAW, No. 77



These Saws are particularly adapted for fine cabinet work, sawing mitres, and where rapid and smooth cutting is required the use of a plane can be dispensed with, as they will cut a joint sufficiently smooth to glue without planing. Regularly made 8 points to the inch, except for about  $1\frac{1}{4}$ " at the front where the teeth are 12 points to the inch. In filing use a  $4\frac{1}{4}$ -inch slim taper file.

8	10	12	14	16 inches
\$16.00	18.00	20.00	22.00	25.00 per dozen
18	20	22	24	26 inches
\$28.00	31.00	34.00	37.00	40.00 per dozen



\$14.50 16.50 18.50 20.50 22.50 per dozen

## BACK SAW, No. 14



Cherry Handle, Carved and Polished. Disston Crucible Steel blade, Warranted. One edge toothed 9 points for cutting with the grain; the other, 13 points, for cross-cutting.

The slotted, heavy steel back, by means of the wing nut and lever tightener is quickly adjusted

to cut any special depth required.

Adapted for tenoning, shouldering, dovetailing, cog cutting, or any purpose where a definite depth

of cut is desired.

12x3 14 16x414 inches 10x3 14x312 No. 14. Back Saw. \$14.50 15.50 17.25 19.00 20.75 per dozen

### BACK SAWS

Trade Mark Registered U. S. Patent Office



Beech Handle, Polished Edge, Blued Back

No. 1. Jackson.....89.00 10.00 12.00 14.00 16.00 18.00 per dozen





#### DOVETAIL SAW, No. 68

Polished Handle, Steel Back, Brass Plated, Extra Quality Spring Steel Blade, 11 inches wide under back, 26 Gauge, 17 points.

#### DOVETAIL SAW, No. 71

The Disston No. 71 Doverail Saw is the same as the No. 68 except that the handle and blade are offset to permit work on a flat surface.



DOVETAIL SAW, No. 69 Same pattern and dimensions as No. 68. Made for cutting

DOVETAIL SAW, No. 70 No. 69 6 8 10 12 ohes.

Apple Handle, Open Grip, Polished Edges, Extra Quality Crucible Steel Blade, 13 inches wide under back, 26 gauge, 17 points. Steel Back Brass Plated.

No. 70, \$7.50 8.00 9.00 9.75 per doz.



Digitized by Google

## DISSTON HANDY SAW KIT, No. 101

The combination of Blades in any of these sets provides a Handy Kit for the practical mechanic, householder, farmer, etc.

12-inch Keyhole \$2.25 per doz.

14-inch Compass \$2.75 per doz.

16-inch Pruning \$7.00 per doz.





Adjustable Handle \$4.50 per doz.

Canvas Case

18-inch Plumbers' \$11.00 per doz.

20-inch 10 Point Cross-cut \$11.00 per doz.



Hardwood Handle, Carved and Polished, with a special lever device which is arranged to hold the blades comprising the Sets rigid and the special formation of the butt of the blades prevents woobbling.

The special shaped Lever Bolt, permits by a quarter or half turn of same,

The special shaped Lever Bolt, permits by a quarter or half turn of same, the keeping of the Lever in position so it will not interfere with the working of the saw.

The Plumbers' Saw Blade is specially tempered for cutting nails, spikes,

bolts, gas pipe, soil pipe, etc.
The blades are made of DISSTON
CRUCIBLE STEEL, ground and polished.
No. 101. SIX BLADE SET. \$4.50

| No. 101, SIX BLADE SET; 41.30
| Cross-cut Saw Blade, 10 point. 20 inch Rip Saw Blade, 7 point. 20 inch Plumbers' Saw Blade 18 inch Pruning Saw Blade 16 inch Compass Saw Blade 14 inch Keyhole Saw Blade 12 inch Adjustable Handle

Adjustable Handle

No. 103, FIVE BLADE SET, 33.50
Cross-cut Saw Blade, 10 point. 20 inch Rip Saw Blade, 7 point. 20 inch Pruning Saw Blade. 16 inch Compass Saw Blade. 14 inch Keyhole Saw Blade. 12 inch Adjustable Handle


Put up in a durable canvas case, having strong well-bound edges, and containing separate compartments for each blade, with a special pocket for the handle. Convenient and light to carry.

# DISSTON HANDY SAW KIT, No. 201

FOR PLUMBERS' USE

Patented Nov. 2, 1909

The combination of Blades in this set provides a handy kit for plumbers' use—14-inch Compass, 16-inch Special Blade, 18-inch Plumbers' Blade, and a 20-inch Hand Saw Blade.





Adjustable Handk \$4.50 per doz.



These are of the same high quality, material and workmanship as the regular Handy Kit. The Plumbers' Saw Blade is specially tempered for cutting nails, spikes, bolts, gas pipe, soil pipe, etc. Put up in a durable canvas case, having strong bound edges, and containing separate compartments for each blade, with a special pocket for the handle. Convenient and light to carry.

Canvas Case \$6.00 per doz.

# HOLDEN PATTERN COMPASS SAW, No. 70



#### EXTRA BLADES FOR HOLDEN PATTERN COMPASS

			H.DISSTON & SONS	J
8	10	12	14	16 inches
\$2.00	2.25	2.50	2.75	3.00 per dozer
Intercha	ngeable Blades, l	Reversible Hand	les, Strong, Conv	enient and Compact.
	-	Packed one do	zen in box.	•

# COMPASS SAWS

CRUCIBLE STEEL

COMPASS SAW, No. 2

# R. DIESTOW ASSINS Brass Screws

#### Apple Handle, Brass Screws

No. 2. Compass Saw......\$4.25 4.50 4.75 5.00 5.25 per dozen

COMPASS SAW, No. 77



#### Apple Handle, Brass Screws

#### COMPASS BLADES

No. 2 and No. 77 Blades....\$2.25 2.50 2.75 3.00 3.25 per dozen

These blades are sent punched unless ordered otherwise
Packed one dozen in box

#### INTERCHANGEABLE, No. 4



#### Packed one-quarter dozen in box

No. 4. Compass Saw. . . \$4.00 4.25 4.50 4.75 5.00 5.25 per dozen

### INTERCHANGEABLE COMPASS BLADES, No. 4

No. 4. Compass Blades...\$2.25 2.50 2.75 3.00 3.25 per dozen
Packed one dozen in box

## ADJUSTABLE COMPASS SAW, No. 9



No. 9. 10 12 14 16 18 inches \$5.00 5.50 6.00 6.50 7.00 per dozen Packed half dozen in box

When ordering Compass Saw Blades designate by number in catalogue. When not otherwise specified No. 4 will be sent.

# NEST OF SAWS, No. 3


Combining one each, Keyhole, Compass and Table or Pruning Saw



1.75	No. 3 Nest per dozen	\$1.75 pe	Nest ming Blade r dozen
2.00	• "	2.00	44
		2.75	"
5.50	"		
		\$6.50	"
֡	1.75 2.00 2.75 5.50 <b>2.00</b>	1.75 per dozen 2.00 " 2.75 " 5.50 " <b>2.00</b> "	1.75 per dozen

Packed three sets in box. Handle and Tightener only, packed one dozen in box

#### SQUARE-HOLE NEST OF SAWS, No. 5



 Handle and Tightener, No. 5
 \$1.75 per dozen
 \$1.75 per dozen

 Square-Hole Keyhole Blade, No. 5, 12 inch
 4.75
 4.75

 Square-Hole Compass Blade, No. 5, 14
 5.50
 5.50

 Pruning Blade, No. 5, 16 inch
 5.50
 5.50

 No. 5 Square-Hole Nest, complete
 \$17.50
 \$12.00

Packed one set in box



This nest of saws consists of handle, tubtrener, and three blades, including a 14-inch Plumbers' compass blade for cutting wood in which mails may be imbedded, lead pipe, and the class of work encountered in the ordinary ocurse of plumbing.

Handle and Tightener, No. 7.	\$1.7	5 per dozen
Plumbers' Compass Blade, No. 7, 14 inch.	3.5	0 "
Compass Blade, No. 7, 16 inch	3.0	ō "
Keyhole Blade, No. 7, 10 inch	2.0	<b>0</b> "
No. 7 Nest, complete	\$10.2	5 "

When ordering Blades, designate by Name and Number Old style Nest Saws with two screws in handle at same price Packed 3 sets in box

# PLUMBERS' COMPASS SAW, No. 8



# PLUMBERS' NEST OF SAWS, No. 60 FOR MISCELLANEOUS WORK



PORTUPATOR STATE OF THE STATE STATE

The No. 60 Nest of Saws consists of Handle, Tightener and Three Blades one 18-inch blade specially tempered for the cutting of wood in which nails may be imbedded, lead pipe and that class of work encountered in the ordinary course of plumbing, one 14-inch Compass Blade and one 10-inch Keyhole Blade.

Adjustable Lever Tightener

#### ADJUSTABLE HANDLE. NO SCREW-DRIVER REQUIRED

The blades are fastened in the Handle by means of the special lever device, which is so arranged as to take in the different thicknesses of the various blades, the pin in Bolt-head being moved forward or backward, as may be required; and this, at the same time, permits the keeping of the Lever on a line with the Handle, so it will not interfere with the working of the saw.

Handle and Tightener, No. 60	per	doz
Keyhole Blade, No. 60, 10 inch		••
Compass Blade, No. 60, 14 inch		٠.
Plumbers' Blade, No. 60, 18 inch		**
A17.70		"
No. 60. Plumbers' Nest, complete		••

Packed three sets in box

#### KEYHOLE SAW AND PAD, No. 95

Round, Hardwood Handle, Polished, Nickel-plated Ferrule.

The Handle is slotted clear through, permitting the adjustment of Blade for length of cutting-edge required.

The Blade, 10 inches long, ground thin-back, is firmly held in place by means of a steel grip inside of Handle, tightened by thumb-screw, which is nickel-plated.

# KEYHOLE SAW AND PAD, No. 5



No. 5. Keyhole Blade, \$1.40; Handle, 60 cents; Complete, \$2.00 per dozen This is an inexpensive and convenient combination of Keyhole Saw, Saw Pad and Screw Driver

#### KEYHOLE SAW AND PAD, No. 10




No. 10. Keyhole Blade, \$1.40; Handle, \$1.00; Complete, \$2.40 per dozen

#### KEYHOLE BLADES CRUCIBLE STEEL

Keyhole Saw Blade, extra ground, set and sharpened . . . . \$2.00 per dozen No. 6. Packed one dozen in box.

DISSTOR


KEYHOLE SAW, No. 15 BEECH HANDLE, BRASS SCREWS



No. 15. Kevhole Saw..... 2.75 per dozen ..82.25 2.50

Trade Mark Registered U. S. Par. Off.

"JACKSON" COMPASS SAWS



No. 20. 30. 40.

12. 

When ordering Compass Saw or Keyhole Saw Blades, designate by number. Packed one-half dozen in box.

# CABINET SAW, No. 80

NICKEL-PLATED LEVER TIGHTENER

Patented Nov. 2, 1909



Cherry Handle, Carved and Polished. Disston Crucible Steel Blade, Warranted. One edge toothed 10 points for cutting with the grain; the other, 15 points, for cross-cutting. 15-inch hole in end for

hanging up saw.

The blade is securely fastened in handle by the lever tightener, which permits a quick adjustment of the handle according to the tooth-edge to be used.

Especially adapted for fine work, such as cabinet, pattern making, mitering, etc. 10 12

No. 80. All sizes, 31 inches wide . . . . \$8.00 8.25 9.00 10.00 11.00 12.00 per dozen.

#### TURKISH



Made with eborated handle at an advance,





Apple Handle, Varnished Edge, Blade 16 x 21 inches at handle, 18 Gauge, 15 Points, \$12.00 per dozen Packed one-third dozen in box.

#### STAIR BUILDERS'

Adjustable for various depths of cut.

PATTERN MAKERS'




Beech Handle, Varnished Edge, Blade 6 x 11 inches 20 Gauge, 8 Points...... \$4.75 per dozen Packed half dozen in box



Plain Apple Handle, Blade 71 x 11 inches, 21 Gauge, 15 Points.......\$5.00 per dozen Packed one saw in box.

# COPING SAW, No. 10



Hardwood Handle, Polished, Heavy Steel Ferrule, Nickel-Plated and Threaded. Crucible Steel, Nickel-Plated, Frame 2-inch wide. A-inch thick, 42-inches deep from tooth-edge to inside of back, length of blade, 62-inches from pin to pin.

This is a well-made Coping Saw, more efficient and stronger than the ordinary wire back style. The blade is controlled or adjusted by the two Knutled stretchers when sawing sharp angles, etc., and is easily inserted or removed.

No. 10. Coping Saw, Frame and Blade, complete. \$8.00 per dozen

Extra Blades, Fitted with Pins. 5.50 per gross

Packed one-sixth dozen in box

#### CURRIER OR SLICKER BLADE OF SUPERIOR QUALITY

CABINET SCRAPER

7 inch x 2 inch, 25 gauge . . . . . \$2.00 per dozen



#### CARINET SCRAPERS

		Chibii	101 0	OIWE E			
	Plain Cut Edges	Ground Ever and Dressed	n Gauge on Edges		Plain Cut Edges	Ground Er and Dresse	ven Gauge d on Edges
2 x4	\$0.30	\$0.55 per	dozen	3 <del>1</del> x6	\$0.90	\$1.65 p	er doz <b>en</b>
2 x6	. 45	.80	"	4 x4	.60	1.10	"
21x5	. 50	.90	"	4 x5	.80	1.45	"
3 x4	.45	.80	"	4 x6	.90	1.65	"
3 x5 3 x6	. 55 . 65	1.00 1.20	"			Plain Cut Edges	Ground and Dressed
Pack	ed one dozen	assorted, small,	2 x 4 to	o 3 x 6 in 1	box	\$0.60	\$0.90
"		" large,	31 x 4 to	n 5 x 6	"	80	1.45

Unless otherwise specified, Plain Cut Edges will be sent

# SWAN NECK

# CABINET SCRAPERS





216x5 236x6 3x5 3x6 inches \$1.80 2.25 2.25 2.75 per dozen

3 x 5 inches.....\$1.80 per dozen \$1.80 2

Packed one dozen in box

# "LITTLE GIANT" PRUNING HOOK AND SAW

SIMPLE AND DURABLE

The Knife and Saw are both made of the best Crucible Steel, and can be used with or without a pole. The tool is strongly made and durable. The Saw is detached where its use is not required on large limbs.

This Pruner fills a long-felt need, as it combines two useful tools in one, without increase of cost to the user.

The Saw-blade is attached to the Hook by means of two clamp-screws, as shown in the accompanying cuts, which also show the method of attaching a Pole or Handle. We also make a Pruning Hook of this style without the Saw Attachment.

Hook and Saw (without pole), \$18.00 per doz. Length of Blade, 12 inches.

Hook only (without pole), \$12.00 per doz.

Hook will take in Branch \( \frac{3}{4} \) in. Diameter.

Packed one-sixth dozen in box.

IMPROVED
PRUNING SAW
AND KNIFE
No. 20



Black Finish Frame (without pole) .....

.311 00 per dozen

This Saw is designed for attachment to a pole, so the upper branches of trees can be reached without the aid of a ladder, the Knife or Saw being brought into requisition as may be required. When desired, the Pole can readily be detached, the socket on the Frame forming an excellent handle.

The peculiar formation of the Tooth enables the Saw to cut both ways, causes an equal strain on the limb, insures smooth and rapid execution, and prevents the saw from becoming jammed in cutting green wood. Length of saw, 10 inches.



# "THE ORCHARD" PRUNING HOOK AND SAW

This tool meets general require-The economy of combining two tools in one will be appreciated.

The Knife and Saw are made of the best Crucible Steel, and can be used with or without a pole. Although possessing great strength, it is of light construction, with crescent - shaped blade having long, slender teeth, so formed as to draw the saw into the wood. It is particularly adapted for sawing the smaller branches in general pruning.

The Saw Blade, which is attached to the Hook by two clamp-screws, can be readily removed, when the Hook only is required. We can furnish this style of Pruning Hook without the Saw attachment if so desired.

Malleable iron handle, Black Finish, with socket.

Hook and Saw (with-

out Pole) . . . . . . . \$18.00 per dozen Length of Blade 10 inches

Hook only (without

Hook will take in Branch & inch diameter Packed one-sixth dozen in box

# No. 111 PRUNING SAW



Similar in quality and style to "The Orchard," without Pruning Hook. Malleable iron handle, Black Finish, with socket. Crucible steel, crescentshaped blade, 10 inches in length; long, slender teeth.

The blade is fastened to handle with wing-nut and so arranged that it may be adjusted to any angle. Can be used with or without a pole.

.....\$11.00 per dozen Packed one-sixth dozen in box

No. 111. . . . . . . . . .

Digitized by Google

# DISSTON TABLE AND PRUNING SAWS, No. 7

CRUCIBLE STEEL



No. 7. Crucible Steel, Grained Blade, Warranted, Apple Handle, Polished Edge, Brass Screws.

\$8.00 8.50 9.00 10.00 11.00 12.00 13.00 14.00 per dozen

BROWN'S TABLE AND PRUNING SAWS, No. 3
CRUCIBLE STEEL



No. 3. Grained Blade, Apple Handle, Polished Edge, Brass Screws.

\$5.50 6.00 6.75 7.50 8.25 9.00 9.75 10.50 per dozen

YORK STATE PRUNER

Beech Handle, Varnished Edges, Brass Screws, Narrow Crucible Steel Blade, Blued. Length of Blade, 20 inches; five inches wide at butt, one inch at point. Toothed seven points to inch.

GRAPE PRUNER



Apple Wood, Open Grip Handle, Brass Screws, Crucible Steel Blade, 10½ inches long, 1½ inches wide at butt, ¼ inch at point.

Grape Pruner ...... \$5.50 per dozen

#### PRUNING SAWS



Patented Nov. 2. 1909

Cherry Handle, Carved and Polished, Crucible Steel Blade, Double Edge—thrust cut on the convex edge, draw cut on the concave edge. Adjustable handle, lever tightener.

12 No. 1......\$11.00

14 11.50 16. 12.50 20 14.50 22 inches 15,50 per dozen

No. 2

Charache and a shake a

Patented Nov. 2 1909

Cherry Handle, Carved and Polished, Crucible Steel Blade, Double Edge. Adjustable lever tightener.

No. 2. . . . . \$10.00

14 16 10.50 11.00 18 12.00

18

13.50

22 inches 14.00 per dozen

PARAGON PRUNER, No. 5



Beech Handle, Varnished Edges, Brass Screws, Crucible Steel Blade, Double Edge—thrust cut on convex edge, draw cut on concave edge.

11.00

12 14 No. 5......\$9.50 10.00 18 12.00

13.00

13.00

22 inches 14.00 per dozen

DISSTON DUPLEX PRUNING SAW, No. 4

BEECH HANDLE, BRASS SCREWS



No. 4 . . . . . . \$8.50

14 9.00 16 9.50

18 10.50 20 11.50 22 inches 12.50 per dozen

AVERY SAW CQ. DUPLEX PRUNING SAW, No. 40

BEECH HANDLE, BRASS SCREWS



No. 40 . . . . . 86.00

14 6.50

16 7.00 18 7.75 20 8.50 22 inches 9.50 per dozen

#### TAPERED PRUNING SAWS

Polished Steel Frames, Crucible Steel Blades, Hardwood Handles. These are specially desirable Pruning Saws, the shape of Frame permitting their use in narrow spaces.

#### POMONA, No. 8




No. 8. Length of Blade, 14 inches centre to centre of holes.....\$12.00 per dozen.


DOUBLE SWIVEL, No. 9



No. 9. Length of Blade, 14 inches centre to centre of holes.....\$14.00 per dozen
"THE FOREST." No. 10



No. 10. Length of Blade, 14 inches centre to centre of holes....\$16.00 per dozen



No. 15. Length of Blade, 14 inches centre to centre of holes....\$16.00 per dozen

Packed one-sixth dozen in box

Blad	les with	pins	for	Nos.	9, 13, 15, 16, 25	.\$1.35 p	er	dozen
**	withou	• ••	**	"	8. 10.	. 1.15	••	•••
**	***************************************	` "	"	**	17	. 1.30	**	**
**	44	**	**	**	18	1.65	**	**
					<b>#3</b>			

### TAPERED PRUNING SAWS










Flat steet back, narrow tapered point, Beech handle, varnished edges, three brass screws. Handle hand-hold for use with gloved hand, swivel stretcher, blued steet blade.

No. 19. Length of blade 18 inches centre to centre of holes. \$12.50 per dozen



Flat steel frame, slightly tapered, riveted sockets, swivel stretcher. Beech handle, varnished edges, two nickel-plated screws. Blued steel blade. Length 14 inches centre to centre of holes. No. 25. ... \$13.00 per dozen

Packed one-sixth dozen in box

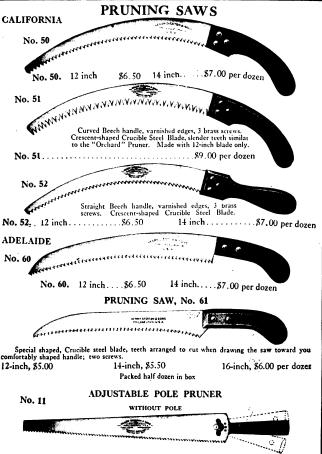

Adapted for sawing by hand or attached to a pole. The Handle is made of malleable iron, with socket, and the Blade of best Crucible Steel. Adjustable for sawing at different angles.

No. 11. Length of Blade, 18 inches; Handle, 5 inches .......\$9.00 per dozen Packed one-sixth dozen in box

## PRUNING SAWS

No. 7%



Similar to the No. 7 Ship Saw, with the exception of extra large hand-hold for use with gloved hand, slightly heavier blade, and coarser teeth for pruning.

20.00 21.50 No. 71 ..... \$18.00 23.00 per dozen

No. D-24



Narrow Point Crucible Steel Blade, Copper Handle with Beechwood Grip.

No. D-24...\$8,00 8.40 8.85 9.30 10.25 11.00 per dozen

No. D-26




Similar to the No. D-20 Handsaw, with the exception of extra large hand-hold for use with gloved hand, slightly heavier blade, and coarser teeth for pruning. The 26-inch is fitted with five brass screws, 24-inch and smaller with four brass screws.

24 26 inches Packed one-third dozen in box.



An excellent tool for general or household use. 26 inches. \$16.00 per dozen.



## TOBACCO SPUDS

CRUCIBLE STEEL BLADES

No. 1. Angular Blade.

No. 2. Oblong Blade. 

#### DISSTON HENRY & SONS

# FOLDING PRUNING SAW, No. 36

The crescent-shaped blade is 9½" long, made of the best crucible steel. The teeth are formed to draw the saw into

when closed

the wood, and the saw cuts on pull. The handle, fitted with our lever-tightener, allows the blade to be adjusted to

OPEN FOLDED carried in different angles: also firmly locks the blade in handle pocket

..... \$10.00 per dozen

No. 36. Pruning Saw (Packed one-sixth dozen in box) :

FOLDING PRUNING SAW, No. 38



The No. 38 blade, 9½", has long, slender teeth. They make a clean, rapid cut on the push or draw stroke. The hardwood handle, 7½", is shaped for a strong, comfortable grip. A nickel-plated screw adjusts blade in handle.

## DISSTON HEDGE SHEARS





American No. 20. Crucible steel blades, Hardwood handles	\$2.00	\$2.38 each
and notches scored to prevent slipping 1.88  The above have tangs extending through handle and riveted.	2.25	2.63 "
No. 104-A. Same as American No. 20, without riveted tang. 1.52 No. 101-A. Same as American No. 30, without riveted tang. 1.75	1.85 2.10	2.25 "
, , , , , , , , , , , , , , , , , , , ,		

#### LADIES' PATTERN HEDGE SHEARS

Same type and quality as No. 100-A.

No. Hedge Shears, blades 61 inch, \$1.25 each.





## **HANDLES**



Each Handle on the DISSTON Hand Saws is separately slit, bored and fitted to its blade, insuring the correct "Hang" to the saw when entering the work.
The stock handle, bored and slit. will not fit holes in the blade from which old handle has been

taken, for the reason given above.

			_						16-20	22-24	26	28	inches
Handles	, No			r			(S	lit only)	\$1.55		\$1.80 1.65		per dozen
"	"	107.	"				(Slit and	Bored)	1.75	\$1.75	2.00	\$2.20	. "
44	"	7,	**				(SI	it only)	2.25	2.25	2.50	2.75	"
	"	D100.	Apple	. Carved	(Bored	and	Slit)		4.00	4.25	5.00	5.25	• •
44	**	D8, D		,			"		3.00	3.25	4.00	4.25	44
44	**	120,	**	Carved	**		"		4.00	4.25	5.00	5.25	**
- "	**	12 and	1112.	Apple, Ca	rved (B	ored	and Slit	)	5,25	5.50	6.50	6,75	46
ec	**	16.		. 24	"'	**	**	·	4.00	4.25	5.00	5.25	44
46	"	D20.		**	"	"	**			4.25	5.00		44
* 44	**	D23,		"	"	"	**			4.25	5.00		4
44	**		D15. F	Rosewood	Carved	"	**		9.75	10.25			46
44													46



# BACK SAW AND COMPASS SAW HANDLES



No. 4 BACK

#### No. 2 COMPASS

	8-10-12	14-16 inches
Back Saw, No. 1, Beech (Slit only)	\$1.25	\$1.50 per dozen
" 4, Apple (Back cut out and Slit)	2.75	3.00 "
Compass, " 2, (Slit only)	1.10	1.10 "

# BUTCHER SAW HANDLES







..

No. 5 Butcher Saw Handles, Nos. 1, 2, 15, 70 and Pork Packers', Nos. 1 and 2 (Slit only) \$1.50 per dozen

••	 "	5, 6, 7 and 23 8 and No. 1 Beef Splitter	"		1.75
	 ••	19	**	٠.	2.00

Packed one dozen in box.

# SAW SCREWS







No. 1

No. 2

No. 4

No. 8, Iron No.

No.	1	Centennial	(Brass S	Screws		\$2.40	per gross
**	2	••	**	**		2 70	**
**	3	44	"	"	Small, Warranted Superior.	3 45	**
**	4	"	"	"	Large, " "	4.60	**
••	8	Iron Screw	s,		Large, " "	2.20	**
"	08	" Brass	Plated			2.50	"
"	9	" "	"			3.00	"
**	14	Brass Scre	ws, Rou	nd He	ad (sm all)	3.25	".
•	15	"	"	**	(large)	3 25	46

Packed in boxes of one dozen.

### Number and Kinds of Screws in Hand Saws

No. 7. \[ \begin{cases} 28-inch \\ 26 \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
D8, D17
No. 120, D100
D115, D15
D20, D23
Nos. 12, 112. 26 and over
No. 16. 28 " Three No. 2, One No. 4 26, 24 and 22-inch. Three No. 1, One No. 3 20-inch. Two No. 1, One No. 3
No. 76
No. 107
No. 3
Nos. 1, 0
Nos. 00
American BoyTwo No. 1, One No. 3

### WOOD SAW BLADES

CRUCIBLE STEEL, PATENT GROUND AND TEMPERED SET AND SHARPENED

#### STRAIGHT BREAST



#### PEG TOOTH



 No. A 6.
 Disston Peg Tooth, 23 inches wide.
 \$7.10
 \$7.55 per dozen

 " A 9.
 " 7.10
 7.55 "

 " A11.
 " 23 " " 8.95
 9.40 "

 " A12.
 " 1½ " " 8.95
 9.40 "

#### ROUND-BREASTED



 No. 26.
 Disston
 Imp'd Round-Breasted, 23 ins. wide
 \$6.65
 \$7.10 per dozen

 " 111.
 " Extra
 " 23
 " 8.50
 8.95
 "

 " 112.
 " 8.50
 8.95
 "

#### No. 45



#### No. 7



Packed one dozen in bundle.

32

# WOOD SAW BLADES

CRUCIBLE STEEL, PATENT GROUND AND TEMPERED SET AND SHARPENED

	CHAMPION TOOTH, No. 16	
	E TOWARD TO A CONTRACT OF THE TOWARD TO ARD TO THE TOWARD TO THE TOWARD	NAME OF THE PERSON OF THE PERS
No. 16.	Disston Crucible Steel, 23 inches wide \$7.10	\$7.55 per dozen
	TUTTLE TOOTH, No. 66	
	WANDA A A A A A A A A A A A A A A A A A A	~~w
No. 66.	Disston Crucible Steel, 23 inches wide\$7.10	\$7.55 per dozen
	LUMBERMAN TOOTH, No. 77	
•	Vancous and a second se	weny.
No. 77.	Disston Improved Wood Saw Blade, 23 inches wide	32 inches \$7.55 per dozen
	MARSHALL, No. 3	
	mmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmm	
No. 3.	Marshall, 21 inches wide	\$4.85 per dozen 5.30 "
	JACKSON, No. 4	
	JACATOR U.S. GALLETON	
No. 4.	Jackson, 2 inches wide	\$3.95 per dozen 4.40 "
No. 245. No. 245.	Round Breasted, Blued, 14 inches wide 3.50 Peg Tooth, 14 inches wide 3.95	3.95 per dozen 4.40 "
	MONTANA, No. 2	
No. 2.	Montana, 14 inches wide	\$3.45 per dozen


165

Packed one dozen in bundle.

#### WOOD SAW RODS

Made of steel wire, with strong, square cut threads. Will not strip or pull out. The loops are riveted with strong, heavy heads, making positively the best line of Wood Saw Rods on the market.

22-inch Rods suitable for saws with 30-inch blade 24 " " 32 " "





CLIPPER ROD \$8.00 per gross ..\$7.50

9.75

CLIMAX ROD



.\$8.00 Tinned . . . .

Tinned . . . . . .

#### PATENT DUPLEX ROD

Extra quality material, special cut thread. The rod is shouldered to give extra strength where thread is cut.

24 inches \$11.50 per gross .\$10.50 Plain . . . . . . . . . . . . . .. 14.00 15.00 

Packed one dozen in paper box.


#### RODS FOR WEB SAW FRAME


Size of Frame Rod Price	12 15 .\$6.25	14 17 6.50	16 19 6.75	$7.00^{\frac{18}{21}}$	20 23 7.25	$\frac{^{22}_{25}}{7.50}$	24 inches 27 7.75 per gross
Size of Frame Rod Price		8.25		30 33 50	32 8.75	34 9.00	36 inches 9.25 per gross

Web Saw Rods are three inches longer than the blades. Packed one dozen in paper box.


10.25

WOOD SAWYER'S DELIGHT, No. 111





IMPERIAL BLUE, CHAMPION TOOTH, No. 48




#### PERFECTION, No. 45



No. 45. Disston Wood Saw, 30 inches, Round-Breast Clock-Spring, Blue Blade, Extra Thin Back, 12 inches wide, 41 Points. Stained and Varnished Frame, Patent Duplex Loop Rod, Tinned.

Price......\$10.50 per dozen


ECLECTIC, No. 40



No. 40. DISSTON WOOD SAW, Stained Red and Varnished, 30 inches. No. 26 Round-Breast Blade. Thin Back, 22 inches wide, 42 Points. Climax Rod, Plain.


Price.....\$10.50 per dozen

#### No. 06



No. 06. DISSTON WOOD SAW, Stained Red and Varnished, 30 inches. No. 6, Straight-Breast, Thin Back Blade, 21 inches wide, 41 Points. Climax Rod, Plain.

Price.....\$10.00 per dozen




No. 50. Special Wood Saw, Stained Red and Varnished, 30 inches. No. 50 Red Frame, Clipper Rod, Plain, with Wide, Blued or Bright, Round or Straight-Breast Blade, 24 inches wide. Etched to order.

Price....


......\$7.75 per dozen

Natural finish at same price


Price ... 3.00 per uozen No. 150. With Champion, Lumberman, Tuttle or Peg Tooth blade, 2 inches wide, 30 inches. Price ... \$7.45 per dozen




CLIMAX FRAME, No. 60




#### BRACE FRAME, No. 80






Packed half-dozen in box

## SWEDISH PATTERN WOOD SAW



110.	233	••	39 "	x 2 "	Peg Tooth 18.00 "	
**	241	**	48 "	x 2 "	Champion Tooth 20.25 "	
	242		42 "	x 2 "	Peg Tooth	\$19.00 dozen
	243		48 "	x 2 "	Peg Tooth	20.25
"	342	**	48 "	x 3 "	Peg Tooth	23 . 50 "



No. 6. DISSTON WOOD SAW, 30 inches, Climax Loop Rod, Plain, No. 6 Blade, Straight-Breast, 23 inches wide, 41 Points.

.....\$9.55 per dozen Price....



No. 3. Marshall Wood Saw, 30 inches, Clipper Loop Rod, Plain, No. 3 Blade, 24 inches wide, 41 Points. Price . . .

....\$7.00 per dozen

No. 03. Marshall Wood Saw, 30 inches, same as above, with Red Frame.

........\$7,45 per dozen

JACKSON, No. 4

Packed half-dozen in box

SAW BUCK, No. 2




"PERFECTION"
No. 3 FOLDING SAW BUCK




No. 3. Made of carefully selected Maple, well seasoned, natural finish. The legs are 2 inches x 1 inch, 304 inches long, strongly braced. The malleable iron castings at each side of the centre brace support the weight, making possible a light but durable Saw Buck. The centre brace is covered with a wood cylinder 2 x 14 inches. This cylinder revolves, and serves to protect the brace from the saw. When opened, the top of centre brace is 154 inches from the ground.

. \$4.25 per dozen

# CABINET SAW FRAME, No. 1





Packed one-quarter dozen in box. SPECIFY IF RODS ARE WANTED. For prices see page 166. For price of blade see page 124. Standard width of blades is 12 inch

## WOOD SAW FRAMES

No. 3.	Frame,	packe	d half	gross in	case.	 		821.00 pe	r gross
No. 6.	**	٠.,	"	· · ·	"		 	25.00	w
No. 50.	+ 6	**	half	dozen ir					"
No. 45.	"	"	"	"					"

 $Nos.\,45$  and 50 Frames packed in half gross cases at special prices

# BOYS' BUCK SAW AND BUCKS PAINTED RED PERFECT, 22-inch Blade, Saws and Bucks,



#### **BUTCHERS' SAWS**

The Disston Butchers' Saws are made with solid steel backs, carefully forged; solid forged sockets. The stretchers are simple in construction but effective.

All handles are made of well-seasoned wood and shaped to give an easy,

comfortable grip.

Having all facilities in this department, we are enabled to produce and maintain the highest standard of quality.



Beech Handle, Polished Edge, Brass Screws, Oval Back,  $\frac{3}{4}$  inch x  $\frac{3}{8}$  inch. Depth-from inside centre-edge of 24-inch frame to tooth-edge of blade, 5 inches. Bright blade; 14 and 16-inch blade is one inch wide; 18-inch and over,  $1\frac{1}{4}$  inches wide, 11 points.



Beech Handle, Polished Edge. Nickel-Plated Screws, Flat Back, \( \frac{1}{8} \) inch x \( \grace^3 \) inch. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, \( \frac{1}{8} \) inches. Bright blade, 1 inch wide. 11 points.

No. 2.....\$11.00 11.50 12.00 12.50 13.25 14.00 per dozen



Apple Handle, Polished Edge, Brass Screws, Flat Back, 1 inch x 1 inch. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, 4% inches. Bright blade, 1 inch wide. 11 points.

## BUTCHERS' SAWS

CALIFORNIA, No. 5, FLAT BACK CLOCK-SPRING BLUED BLADE



Beech Handle, Polished Edge, Brass Screws, Flat Back, 1 inch x 1/2 inch. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, 6 inches. Clockspring, blued blade, 4 inch wide, 13 points, fastened with screw in front end. 20 22

Polished . . . . . \$18.50 19.00 19.50 20.00 21.00 per dozen 23.50 51. Nickel-plated.. 22.50 23.00 24.00 25.00

#### CALIFORNIA, No. 6, OVAL BACK



Beech Handle, Polished Edge, Brass Screws, Oval Back, 3 inch x 3 inch. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, 51 inches. Blued blade, 2 inch wide, 11 Points.

16.75 17.50 18.50 19.50 per dozen



Beech Handle, Polished Edge, Brass Screws, Flat Back, 1 inch x 1 inch. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, 5 inches. Bright blade, § inch wide, 10 points.

20 22 18.00 per dozen No. 7. Polished ..... \$13.50 No. 7½. Nickel-plated .. 17.50 15.00 19.00 19.75 20.50 21.25 22.00

#### **BUTCHERS' SAWS**

FLAT BACK, No. 8



Beech Handle, Polished Edge, Brass Screws, Flat Back, 1 inch x 1 inch. Depth from inside contre-edge of 24-inch frame to tooth-edge of blade, 41 inches. Bright blade, 1 inch wide, 10 points.

No. 8 . . . . . \$17.75 18.25 19.00 20.00 21.00 22.00 23 00 per dozen

Handles specially made with thumb-hold, giving an easy, comfortable grip and perfect control over the saw

#### FLAT BACK, No. 13



Cherry Handle, Polished Edges, Nickel-plated Screws, Flat Back, 1 inch x ½ inch, special temper artension. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, 54 inches. Clock-spring blade, 24 gauge, 4 inch wide, 13 points to the inch.

 No. 13
 16
 18
 20
 22
 24
 26 inches

 No. 13
 \$20,00
 20,50
 21,00
 21,50
 22,00
 23,00 per dozen


The manner of inserting and fastening the blade in this saw is quick and easy. Front end of blade is fastened with a threaded screw, the blade is held at the stretcher end by a loose pin, giving a quick and easy adjustment. Diamond shape stretcher passing through a diamond shape eye, tightening with a wing nut, makes the saw sanitary.

#### FLAT BACK, No. 15



Beech Handle, Polished Edge, Brass Screws, Flat Back, ‡ inch. Depth from inside centreedge of 24-inch frame to tooth-edge of blade, 4‡ inches. Blued blade, 1 inch wide, 11 points.

### **BUTCHERS' SAWS**




Apple Handle, Polished Edge, Nickel-plated Screws, Flat Back, 1 inch x ½ inch. Depth from inside centre-edge of 24-inch frame to tooth-edge of blade, 5 ½ inches. Clock-spring blued blade, ½ inch wide, 14 points, fastened with screw in front end.

 No. 16.
 Polished
 16
 18
 20
 22
 24
 26
 28
 inchet

 "16}.
 Polished
 513.75
 14.50
 15.25
 16.25
 17.00
 18.00
 19.00
 per dozen

 "16\*.
 Nickel-plated
 17.75
 18.50
 19.25
 20.25
 21.00
 22.00
 23.00




Beech Handle, Polished Edge, Brass Screws, Flat Back, 1 inch x ½ inch. Depth from inside centreedge of 24-inch frame to tooth-edge of blade, 5½ inches. Bright blade, 1½ inches wide. 11 points.

No. 19. Polished... \$18.50 19.25 20.00 21.00 22.00 23.00 24.00 per dozen 19. Nickel-plated 22.50 23.25 24.00 25.00 26.00 27.00 28.00








Beech Handle, Polished Edge, Steel Screws, Flat Back, \$\frac{1}{2}\$ inch x \$\frac{1}{2}\$ inch, Square Edge. Depth trom inside centre-edge of 24-inch frame to tooth-edge of blade, \$\frac{1}{2}\$ inches. Blued blade, \$\frac{1}{2}\$ inch wide, II points.

### HENRY DISSTON SONS ጸተ



Beech Handle, Polished Edge, Steel Screws, Flat Back, 34" x 1/4" Square Edge. 4½ inches from inside centre-edge to tooth-edge in 24-inch size Blued Blade, 34 inch, 11 points.

18 20 22 11.00 89.40 10.00 10.50 11.50 12.35 13.00 14.00 per dozen



Beech Handle, Polished Edge, Brass Screws, Flat Back, 14 inch x 1 inch. Depth from inside centre-edge of 28-inch frame to tooth-edge of blade, 51 inches. Bright heavy blade, 2 inches wide, 8 Points fastened with screw in front end.

inches 24.00 26.25 27.50 \$23.00 25.00 29.00 per dozen Packed one-third dozen in box




Beech Grips, Polished Edge, Brass Screws, Flat Back, 14 inch x 16 inch, depth from inside centre-edge of frame to tooth-edge of blade, 67 inches. Bright, heavy blade, 2 inches wide, 8 Points. ......34 in., \$4.00 36 in., \$4.50 each

The length or size is determined by the length of the blade it takes, measured over all. Packed one-sixth dozen in box

Beech Handle, Polished Edge, Brass Screws, Oval Back, inch x is inch. Bright blade, I inch wide, 11 Points.



No. 1..... ...14 in., \$12.25 16 in., \$13.00 18 in., \$13.75 per dozen



Beech Handle, Polished Edge, Brass Screws, Flat Back, § inch x ye inch. Bright blade, 1 inch wide, 11 Points.

16 in., \$11.00 18 in., \$11.75 per dozen No. 2... .14 in . \$10.25 Packed one-third dozen in box

# DE-HORNING, No. 6



Japanned Malleable Iron Frame, Beech Handle, complete, with Blade 10 inches long, 4-inch wide.

No. 6. Complete...\$7.00 per dozen

Packed half dozen in box,

# SAW KNIVES CRUCIBLE STEEL BLADE



# PTOP DESCRIPTION A SHOP

### MINCING KNIVES

- No. 4. Crucible steel blade, plain Beech handle, brass screws.......\$22.00 per gross
  No. 6. Crucible steel blade, Beech handle, var-
- nished edges, brass screws, \$27.50 per gross
- No. 8. Heavy crucible steel blade, Beech handle, varnished edges, brass screws, \$29.50 per gross.

Nos. 4 and 6 same pattern, but smaller in size than No. 8.
Packed one dozen in box.

### **BUTCHERS' BLOCK SCRAPERS**

### WALL SCRAPERS

No. 8

No Per o

- 1. Cast steel, 3 ins. wide, \$1.50
- 2. Cast steel, 4 ins. wide, 1.70
- 6. Special, 4 ins wide, 1.05
  Packed one dozen in box.



Butchers' Block Scrapers, plain Beech handle, six-inch blade, 5 inches wide, \$3.75 per dozen.

Packed one dozen in box.

### HENRY DISSTON SONS &z

# KITCHEN SAWS


STANDARD, No. 0



Round Back, # inch, Bright Blade, # inch wide.

.\$5.10 5.10

16 inches 5.60 per dozen



Heavy Flat Back, & inch x 36 inch, Bright Blade, 3 inch wide.

\$6.30 6.30 7.00

7.75 per dozen

CHALLENGE, No. 12



Flat Back, 1 inch x 16 inch, Blade, 1 inch wide.

3.40 .83.40

3.70 per dozen

ECONOMY, No. 1000



Oval Back, ½ inch x ¼ inch, Blade, ¾ inch wide.

. \$3 80 3.80 No. 1000 . . . . .

16 inches 4.10 per dozen

UNIVERSAL, No. 10



Round Back, 1/2 inch, Blade, 2 inch wide.

\$3<sup>12</sup>.15 3.15 3.45 per dozen

Packed half dozen in box.

### BUTCHER SAW BLADES



	•	Bright	blades, 3 to 11	inches wide, in	clusive		
\$2.90	14 3.10		18 20 3.50 3.70	3.90	24 4.10 4.3		inches per dozen
		Brig	sht blades 1½ to	2 inches wide,	inclusive		
16 \$3.90	18 4.10	20 4.30	0 4.50	24 4.70	26 4.90	5.10	inches per dozen
	HEN WINTHS	OF BRIGHT I	BLADES ARE NO	T SPECIFIED OF	NORDER, 11/2 INC	CH WILL BE S	ENT.

REGULARLY MADE II POINTS TO INCH, NOT PUNCHED AT ENDS.

### CLOCK-SPRING BLUED BLADES

12	14	16	18	20	22	24	26	28 inches
To 11 inches wide\$3.10	3.30	3.50	3.70	3.90	4.10	4.30	4.50	4.75 per dozen
To 2 " 3.70	3.90	4.10	4.30	4.50	4.70	4.90	5.10	5.35 "

WHEN WIDTHS OF BLUED BLADES ARE NOT SPECIFIED ON ORDER, 1/2 INCH WILL BE SENT. REGULARLY MADE 13 POINTS TO INCH, NOT PUNCHED AT ENDS.

### BUTCHER BLADES IN COIL

EITHER BLUED OR BRIGHT



The blade is not suitable for band saw use. Blades for machine power are specially made. See page 57.

The coil of Butcher Blade is intended for use only in butcher saw frames, operated by hand

inch wide, 7 cents.

inch wide, 8 cents.

a inch wide, 9 cents per foot.

Packed in coils of 25 and 50 feet. 50-foot coil (blue finish) sent when not otherwise specified.

No warranty on these saws except for visible defects as shown by split teeth

"MIDGET" SAW PUNCH, No. 1





No. 340. For Cutting Iron and Steel. Made especially for use of Structural Iron Workers, particularly in places and positions where the ordinary hack frame cannot be used. Blade of special high temper, hollow ground for clearance, requiring no set on teeth. 12 points to inch. Do not attempt to set.

\$20.75 23.00 25.00 28.00 30.25 32.50 36.00 39.00 jerdozen

No. 341. For Cutting Copper and Brass. Similar to No. 340. Same price. Made 10 points to inch. Do not attempt to set teeth.

No. 342. For Cutting Metal Trim. Designed especially for cutting lightpressed steel shapes—steel mouldings and metal trim of all kinds. Special high temper, hollow ground for clearance, requiring no set. 16 points to inch. Do not attempt to set.

18-inch.......\$23.00 20-inch......25.00 22-inch. 28.00 per dozen

No. 343. For Cutting Kalamein. Soft metal drawn over a wooden or composition body—and material of a similar nature. 11 points to inch. Teeth can be set and filed.

\$14.75 16.25 18.00 20.00 21.50 22.50 25.50 28.50 per dozen



No. 440. For Cutting Steel or Iron. 12 points to inch.

4-inch under back, \$30.00 \$32.50 \$35.00 \$37.50 \$40.00 \$42.50 \$45.00 \$dozen 5 " " \$35.65 \$38.75 \$41.90 \$45.00 \$48.15 \$51.25 "

No. 441. For Cutting Copper. 10 points to inch Same price as No. 440.

No. 442. For Cutting Metal Trim. 15 points to inch. Same price as No. 440 Above saws special high temper. Do not attempt to set teeth.


No. 443. For Cutting Kalamein. 11 points to inch.

4-inch under back, \$24.00 | 26.00 | 28.00 | 30.00 | 32.00 | 34.00 | 36.00 | dozen 5 " " " 28.50 | 31.00 | 33.50 | 36.00 | 38.50 | 41.00 "

For Filing Nos. 340, 341, 342, 440, 441 and 442 we recommend a Disston Superfine 5-inch, 3-square Metal Saw File, No. 2 Cut.

For Nos. 343 and 443 use a Disston 51-inch Slim Taper File.

REVERSIBLE FRAME, No. 1



Solid Flat Back, Forged Steel Frame, Solid Sockets, Hardwood Handle, Polished. Depth from inside edge of 10-inch frame to tooth-edge of blade, 3 to inches.

No. 1. Polished, frame only 12 14 \$9.00 9.50 10.00 11.00 12.00 13.00 per dozen No. 11. Nickel-plated, frame only \$11.00 11.50 12.00 13.00 14 50 15.50

### "KEYSTONE" REVERSIBLF FRAME, No. 2



Solid Oval Back, Hardwood Handle, Depth from inside edge of 10-inch frame to tooth-edge of blade, 2\frac{3}{2} inches.

No. 2. Japanned, frame only. \$5.15 5.35 5.60 5.80 6.00 6.25 per dozen

"3. Polished "6.85 7.10 7.30 7.50 7.75 8.00 "

### IMPROVED REVERSIBLE FRAME, No. 18



Solid Oval Back, Tinned, Extra Strong, Square Stretcher, Reversible, Hardwood Handle, Polished. Depth from inside edge of 12-inch frame to tooth-edge of blade, 3 inches.


No. 18. Tinned, frame only

8 9 10 11 12 14 16 18 inches \$6.00 6.25 6.50 6.75 7.00 7.50 8.00 8.50 per dozen

No. 18 FOR DISSTON HOLLOW-GROUND BLADE AND THOSE ON WHICH THE LENGTH IS MEASURED OVER ALL.

Packed one frame in box

No. 25



Solid Steel Flat Back 1 inch x ½ inch, Depth 4½ inches from inside edge of frame to edge of blade. Polished Hardwood Handle. This is the strongest frame made. No riveted parts. Reversible Stretcher, special adjustment, sockets of solid steel forged. Made for 12-inch blades only.

### IMPROVED ADJUSTABLE, No. 31



Steel Frame, Riveted Sockets, Polished Hardwood Handle. Blade readily inserted; parts will not fall out while readjusting. Adjustable to half-inches.

Depth from inside edge of frame to tooth-edge of blade, 3\frac{3}{2} inches. Adapted for blades 8 to 12 inches.

 No. 31. Polished, Frame only
 \$16.25 per dozen

 " 31½. Nickel-plated, Frame only
 18.00




Steel Frame, Nickeled, Riveted Sockets, Reversible, Black Hardwood Handle. Stretchers will not fall out while readjusting. Depth from inside edge of frame to tooth-edge of blade, 3½ inches. Made for 8-inch blade only.

Packed one frame in box

No. 351



Pistol Grip Handle, Hardwood, Black Finish, Steel Frame, Nickel-plated, adjustable by half inches to take in blades 8 to 12 inches. Riveted sockets. Reversible stretchers; will not fall out while readjusting.



Closed Handle, Hardwood, Black Finish, Steel Frame, Nickel-plated, adjustable by half inches to take in blades 8 to 12 inches. Riveted sockets. Reversible stretchers; will not fall out while readjusting.
No. 364. Frame only..... 

No. 2




Steel Frame, Nickeled, Riveted Sockets, Reversible, Hardwood Handle. Stretchers will not fall out while readjusting. Depth from inside of frame to tooth-edge of blade 315 inches.

10

12 inches No. 20. Frame only . . . .........\$8.00 8.50 9.00 10.00 per dozen Put up one frame in a box.


No. 200



Depth, 1 inch from tooth-edge to inside of Back.

Steel Frame, Square Stretcher, Reversible four positions, Hardwood Handle.
The low-back frame permits its use in extremely close quarters and affords better control of the saw. Adapted especially for electricians and plumbers, etc. Takes in 8-inch blade, measured centre to centre of holes. ..... \$6.50 per dozen No. 200. Frame and Blade .....

Packed one-sixth dozen in box.



Steel Frame, Nickeled, Riveted Sockets, Reversible, Black Hardwood Handle. Blade easily inserted. Stretchers will not fall out while readjusting. Adjustable 8 to 12 inches. Depth from inside edge of frame to tooth-edge of blade, 3\frac{3}{4} inches. No. 110. Nickeled, Frame only................................\$8.00 per dozen Packed one frame in box.

### EAGLE HACK SAW, No. 115



Japanned Frame and Handle. Stretcher made with a square stock, preventing blade from turning. The blade can readily be loosened or tightened by turning handle. Depth from inside edge of 12-inch frame to tooth-edge of blade, 2\frac{2}{4} inches.

8 9 10 12 14 inches.

9 No. 115. Frame only. . \$3.60 4.20 4.50 4.80 5.20 per dozen

Packed one in a box.

### SCREW SLOTTING HACK BLADES



Disston Special Crucible Steel, tapered and hollow ground to run without set. Tempered so they can be refiled. Milled teeth. Put up in a set of four blades, one each.

8		" w Slottin		. "	2	"	18		(.049)			0.19	" ner set
8		"		**	Į	**	16		(.065)			0.22	**
8	**	**		"	į	**	14		(.0 ) )			U. <b>2</b> 3	
8	in.	centre to	centre of	holes,	l in.	wide,	12	gauge	(.109)	24	Points	\$0.26	each

### RAIL HACK SAWS



Nos. 6, 7, 8, 9, 10, Steel Frame, Polished, Riveted Sockets. Strong and durable. These are specially adapted for Large Work, cutting off Iron Beams, Girders, etc., and will be found a very valuable tool for Contractors.

No.	6.	71	ın.	inside	of frame to	o tooth-edge,	suitable for	9 in.	blades	i. \$15.00 per do	z. Frame	s only
**	7.	10		••	**	**	**	12 "	••	18.00 " "		"
••	8.	10	"	**	**	••	**	14 "	"	19.00 " '		"
		10		**	44	**	**	16 "	"	23.00 4 4	1 44	**
••	10.	10	**	"	44	44	**	18 "	**	28.00 " "	1 44	**

Nos. 9 and 10 MADE WITH HANDLE ON EACH END



Packed one frame in box

Nos, 14 and 15 MADE WITH HANDLE ON EACH END

Blades, 2 in, wide, 21 gauge, 15 points.....\$13.50 16.20 18.90 21.60 24.30 per gross

Length of blades measured from centre to centre of holes

Trade Mark Registered U. S. Patent Office

### HACK SAW BLADES

### 1MPROVED "CHROMOL" Hardened throughout



### MILLED TEETH

Made of "CHROMOL STEEL," a high-grade material peculiarly suited for Metal-cutting Blades. The teeth are milled, giving the greatest possible strength, and making them sharp and clean; set in such a manner that every third tooth is straight—acting as a cleaner—while the two intervening teeth are set alternately right and left. This arrangement allows each tooth to do its full share of the work, and the action of the cleaner tooth, to a great extent, relieves the set teeth of part of the wear, which considerably prolongs the life of the blade.

They are hardened by the DISSTON process, which renders them hard and tough without being brittle.

For hand frame use we recommend blades with Number of Teeth as follows:

14 Teeth. For stock of sufficient thickness to avoid catching teeth against edges, e. g., steel rails, cold rolled stock, cast iron and bronze, brass and copper, also hard rubber and fibre.

18 Teeth. For general use. For cutting tool steel, hard metal, and light structural shapes, etc.

24 Teeth. For sheet metal or tubing from 16 to 20 gauge, brass, copper, drill rod, wrought iron, pipe, etc.

32 Teeth. For tubing with thin walls and thin sheet metal.

IN GENERAL: The coarser the tooth the faster the cut; the finer the tooth the less risk of tooth breakage.

# IN ORDERING, SPECIFY NUMBER OF TEETH OR POINTS WANTED OTHERWISE 14 TOOTH BLADES WILL BE SENT

Length	Width	Gauge	7	eeth	to Inc	h	Price per Gross
8''	12"	No. 23 .025"	*14	81*	*24	*32	\$8.00
9"	12"	No. 23 .025"	*14	*18	*24	•32	9.00
10"	1 ź"	No. 23 .025"	*14	*18	*24	*32	10.00
12"	12"	No. 23 .025".	14	18	*24	•32	12.00
12"	<del>1</del> 3"	No. 23 .025"	*14	*18			12.00
14"	A"	No. 23 .025"	14	18	24		14.80

<sup>\*</sup>Regularly carried in stock.

### MACHINE HACK SAW BLADES



### MILLED TEETH

These Blades are made of the same steel, teeth milled and set in the same manner as on the Improved Chromol Blades for hand use.

# DISSTON IMPROVED "CHROMOL" FOR LIGHT GRAVITY FEED MACHINES AND USE IN RAIL HAND FRAMES

Trade Mark Registered U. S. Patent Office

Length	Width	Gauge	Tcet	ı to I	nch	Price per Gross
10''	54"	No. 22 .028"	14	18	24	\$14.40
12"	56"	No. 22 .028"	*14	18	24	16.80
12"	58"	No. 21 .032"	*14	18		17 88
14"	\$8"	No. 21 .032"	*14	18		20.40

### DISSTON IMPROVED "CHROMOL" FOR HEAVY MACHINES

Length	Width	Gauge		Teet	h to I	nch	Price per Gros
10"	3/4"	No. 18 .049"		10	14		\$24.72
12"	3/4"	No. 21 .032"		10	*14	18	21.36
12"	3/4"	No. 18 .049"		*10	*14		28.92
12"	1"	No. 18 .049"		*10	14		37 92
12"	1"	No. 16 .065"		10			44.64
14"	3/4"	No. 21 .032"		10	*11	18	24.36
14"	34"	No. 18 .049"		*10	*14		33.12
14"	1"	No. 18 .049"		*10	14		43.56
. 14"	1"	No. 16 .065"	8	*10			50.88
16"	34"	No. 21 .032"		10	14	. 18	27 48
16"	3/4"	No. 18 .049"		10	14		37 44
16"	1"	No. 18 .049"		*10	*14		49 08
16"	1"	No. 16 .065"	8	*10			56.88
17"	3/4"	No. 18 .049"		10	14		39.72
17"	1"	No. 18 .049"		*10	*14		51.72
17"	1"	No. 16 .065"	8	*10			59.52
17"	11/4"	No. 16 .065"	- 8	10			71.76
18"	1"	No. 18 .049"		*10	14		54.36
18"	1"	No. 16 .065"	8	*10			62.04
18"	1½"	No. 16 .065"	- 8	10			90.24
20"	1"	No. 18 .049"		10	14		59.52
20"	1"	No. 16 .065"	8	10			67.92
24"	1"	No. 18 .049"		*10	14		70.32
24"	1"	No. 16 .065"	8	*10			79.32
24"	11/2"	No. 16 .065"	*8	10			119 04
30"	1½"	No. 16 .065"	8	10			147.84

<sup>\*</sup> Regularly carried in stock.

Note-14" and 17" blades measure respectively 131/2" and 161/2" between centres of holes.

### HACK SAW BLADES

### DISSTON'S HOLLOW GROUND

LENGTH MEASURED OVER ALL



We call particular attention to these blades for work requiring accuracy. They are made of Disston special crucible steel; hollow ground to run without set, and tempered so that they can be refiled.

For sawing all classes of metal they are superior to any other blade on the market, and are so acknowledged by all practical people who use them.

Per dozen	\$2.30	2.40	2 50	2.60	2.70	3.00	3.25	4.00	4.50
Teeth, per inch	14	14	14	14	14	14	14	14	14
Gaure decimal equivalent	035	035	042	042	042	042	042	042	042
Gauge [Disston] Tooth-edge		20	19	19_	19	19	19	19	19
Width, inches	5.6	Sá	- 14		- 17	7.6	7 8	7.á	1
Length, inches		9	10	11	12	13	14	16	18

### DISSTON "DURAFLEX" HACK SAW BLADES

A MILLED TOOTH, FLEXIBLE BACK BLADE



An unusually good flexible back blade; made of a special Disston-made alloy steel, with milled teeth. We recommend this blade where awkward cutting positions are encountered and for unskilled workers, because of its flexibility and ability to withstand abuse.

Longth	Width	Gauge	1	ecth	to Inc	:h	Price per Gross
8"	12"	No. 23 .025"	*14	*18	*24	•32	\$8.00
9"	12"	No. 23 .025"	*14	*18	*24	•32	9 00
10''	12"	No. 23 .025"	*14	*18	*24	*32	10.00
12"	12"	No. 23 .025"	14	18	*24	*32	12 00
12"	16"	No. 23 .025"	*14	*18			12.00

<sup>\*</sup>Regularly carried in stock.

Locksmiths' Blades, 1/4 inch wide, 23 [.025] or 25 [.020] gauge, 16 or 22 points. 

Jewelers' Blades, 1/4 inch wide, 28 [.014] gauge, 30 points. .... \$9.00 per gross

Always specify length from centre to centre of holes, width, gauge or thickness, and number of "Points" to inch desired.

Plastering Trowels, as illustrated on the following pages, are what are known as finishing trowels, and are always supplied when not otherwise specified.


Browning Trowels furnished when specially ordered, at same price, these being one gauge heavier than finishing trowels, and working side not ground to thin edge.

Disston Trowels are made of the highest grade crucible steel, carefully tempered and ground, the handles are mounted in the most approved manner, and are fully guaranteed.

We have been manufacturing Trowels since 1855.


Disston Finishing Trowel. . . \$14.75

No. 0.



Length of Blade Width of Blade Number of Rivets 16.25 19.50 per dozen

The mounting and handle of this trowel are adjusted by an improved method, making it strong, durable and easy to the hand. The blade is of the highest grade crucible steel, highly tempered, and properly ground from the centre to the edges on the working side.




No. 1. ..... \$13.75 18.50 per dozen DISSTON EXTRA. 15.25 16.75

The handles of the No. 1 Plastering Trowels are fastened by an improved method, fitting better to the hand, and not liable to come loose.

Packed half dozen in box.


17.75

No. 2



		10 and 1034	11	114,	12 inches
	Width of Blade	417	444	414	174
	Number of Rivets	3	3	4	4 ~
No. 2.	Disston	\$12 25	13 50	14.50	15.75 per dozen

### CINCINNATI PATTERN



	No. 21 CI	CINNATI		
	S rivets in			
		all lengths		
	Hength of Blade 10 and 10% Width of Blade 4%	416	1117	12 inches
No. 21.	Disston	13.00	13.50	14.00 per dozen
	No. 22 CINCINNATI EVI	TDA WAINE	T HANDLE	

### WOODROUGH & McPARLIN CINCINNATI PLASTERING TROWELS


No. 122 CINCINNATI EXTRA, WALNUT HANDLES—5 rivets in all lengths

Length of Blade 10°; 11 11°; 12 12 inshes
Width of Blade 44 44 18

No. 122. W. & McP. \$14.00 14.50 15.00 15.50 per dozen

Packed half-dozen in box

No. 12




Four rivets in all lengths

15.75 per dozen 13.50 14.50

Distance on 11-inch trowel from end of blade to shank at one end 41 inches, and 2 inches at the other end; 41 inches between shanks.

12 inches


No. 13



Three rivets in all lengths

Distance on 11-inch trowel from end of blade to shank at one end 43 inches, and 24 inches at the other end; 41 inches between shanks; width of blade, all lengths, 41 inches.

No. 23



Three rivets in all lengths

Same as No. 13, except mounting is in centre of blade 10.00 per dozen 8.50

> The above Trowels especially adapted for Cement Workers' use Packed half-dozen in box


WESTERN, No. 16

Same pattern and dimensions as No. 17, WITHOUT REINFORCING POST.

16.00

10 and 10% 12 inches 16.50 per dozen 15.50 No. 16. Disston...

WESTERN, No. 17



Made of the highest grade crucible steel; tempered by our improved method, accurately ground, thin blades. Fastened with seven rivets to long mounting with shield. Tang extends through handle and is securely fastened with flush barrel nut. End of handle beveled for thumb-rest. The strengthening post at end of handle prevents the mounting from bending when the trowel is used for work such as cementing, etc., where pressure is exerted. Polished handles.

No. 17. Disston...... \$16.00 16.50 17.00 17.50 per dozen

### PLASTERERS' FINISHING, No. 118 LEATHER GRIP



These Trowels are of the same high quality, workmanship and pattern as Nos. 16 and 17, with the exception that the blades are fastened with ten rivets

to e	xtia ii	ong mountings.	1113	12 inches
No.	18.	Polished Handle	\$17.00	\$17.50 per dozen
**	19.		18.00	18.50 "
**	28.	" ex.thin blade, 24 ga. 16.50	17.00	17.50 "
**	118.	Leather Grip	21.00	21.50 "
**	119.	" " with post 21.50	22.00	22.50 "
"	128.	" extra thin blade, 24 ga. 20.50	21.00	21.50 "

Packed half-dozen in box

No. 38 FINISHING



Made of the highest grade Crucible Steel, tempered by our improved method; accurately ground blades, extra thin, 24 gauge, slightly concaved. Extra long mounting, fastened to the blade with ten neets. The handle is specially shaped and formed to the the hand.

CIRCLE OR COVE TROWEL

INSIDE

CORNER TROWEL

INSIDE



No. 24, Inside or No. 25, Outside Circle Radius 2 3 inches



No. 26, Inside or No. 27, Outside Angle

6 inches long....\$9.00 11.80 per dozen 6 inches long....\$7.00 per dozen

State whether "Inside" or "Outside" is wanted


MASONS' MITRE RODS
BEVELED ON LONG EDGE



No. 3.

\$2.50 2.95 3.75 4.80 5.80 per dozen \$6.70 7.50 8.75 9.15 per dozen

MARSHALL PATTERN No. 3




9.25

12 inches 10.00 per dozen

Packed half-dozen in box

### TROWELS

CEMENTERS', No. 20



Four rivers in all lengths

Extra heavy blade, 16 gauge. Made of high-grade Crucible Steel. Tempered by our improved method, accurately ground. Mounting 3-inch wide and extends within 2 inches of the ends.

 12 inches

19.75 per dozen

### PAINTERS' CEMENT, No. 49



Used by ironworkers and ship painters in cementing the bilge keel of vessels, etc.

Crucible Steel Blade, Riveted Tang. 5½ inches x 4½ inches.....\$8.00 per dozen

### CEMENTERS' EDGING TROWEL, No. 50



### **BRICK TROWELS**


LONDON PATTERN, No. 5



7% 817 911 10 1015 inches No. 5. \$7.50 9.00 8.00 8.50 9.50 10.00 10.50 per dozen 11 1135 12 1234 13 131/4 inches \$11.00 11.50 12.00 12.75 13.50 14.25 15.00 per dozen

### LONDON PATTERN, No. 6

THROUGH TANG, CAPPED



No. 6. 9.25 10.75 per dozen \$7.75 8.25 8.75 9.75 10.25 1137 12 121/2 1336 14 inches \$11.25 11.75 12.25 13.00 13.75 14.50 15.25 per dozen

### LONDON PATTERN, No. 7

THROUGH TANG, DOUBLE FERRULE



84 9!5 10 1033 7% inches No. 7. \$8.00 8.50 9.00 9.50 10.50 10.00 11.00 per dozen 1136 12 1234 13 1316 14 inches \$11.50 12.50 12.00 13.25 14.00 14.75 15.50 per dozen

Packed half-dozen in box

Post at right angle to blade, insuring proper balance

### HENRY DISSTON & SONS

### **BRICK TROWELS**



No. 12. Same pattern as No. 10, with light-weight, flexible blade.

814 9% 11.50 10 **\$**9.50 101/ No. 12. 10.00 10.50 11.00 12.00 12.50 per dozen \$13.00 13.50 12 1234 15.50 13 ½ 16.25 inches 14.00 14.75 17.00 per dozen

> Packed half-dozen assorted lifts in box Post at right angle to blade, insuring proper balance




No. 14......\$8.75 9.00 9.25 per dozen



Packed half-dozen in box

### **BRICK TROWELS**

NEW YORK, No. 11



Extra quality Crucible Steel Blade, carefully hardened and tempered, ground to a true and correct taper.

No. 11.		10.50		10!4 12.50	per dozen
		12 14.00		1	

### NEW YORK, No. 111

WITH LEATHER GRIP




No. 111.	\$12.00	8 12.50	0,1	9 13.50	9½ 14.00	14.50	1011 inches 15.00 per dozen
				12 14 17 . 25		inches per dozen	

The tang extends through handle and is riveted.

Packed half-dozen in box
Post at right angle to blade, insuring proper balance


# BRICK TROWELS



Extra quality Crucible Steel Blade, carefully hardened and tempered, ground to a true and correct taper.

No. 11½.	 10:00		11.00	11.50	12.00	10% inches 12.50 per dozen
		12 14.00			nches per dozen	

### NEW YORK, No. 1113



Similar to No. 113 with Leather Grip.

These Trowels are of same quality and design as our No. 11 and 111, with the exception that the tang does not extend through handle, thus giving a solid wood end, which is preferred by some users.


Packed half-dozen in box

Post at right angle to blade, insuring proper balance

### HENRY DISSTON & SONS

### BRICK TROWELS

**BOSTON PATTERN, No. 32** 



### LOWELL PATTERN, No. 33



6 614 7 714 8 814 9 914 10 1014 inches

\$55.50 6.00 6.50 7.00 7.50 8.00 8.50 9.00 9.50 10.00 per dozen



Packed half-dozen in box

Post at right angle to blade, insuring proper balance

208

### BRICK TROWELS

### "PEERLESS"

This is the highest type, the very ACME OF PERFECTION in Trowel making. Each DISSTON Trowel is made from a single diamond-shaped piece of steel from one end of which is forged the tang. The steel—DISSTON CRUCIBLE STEEL—is of a quality adapted for trowel blades, which are highly tempered, taper-ground, and possess the characteristic spring, giving greatest efficiency.


The post being straight, or at right angles with the blade, gives better balance in use.

The handles made of hickory, polished; reinforced with a long, heavy nickelplated steel ferrule.

For efficiency, lasting qualities and beauty of finish these Trowels establish a new standard.

# PEERLESS, No. 40 LONDON PATTERN

9% and 10 10% 11 11% 12 inches
No. 40 .......\$18.25 18.75 19.25 19.75 20.25 per dozen



Assorted weights—light, medium and heavy

### HENRY DISSTON & SONS

### TROWELS

PEERLESS, No. 42



No. 42 ... \$18.25 18.75 19.25 19.75 20.25 per dozen

Packed half-dozen in box

Assorted weights—light, medium and heavy

PEERLESS POINTING, No. 45



No. 45......\$6.10 6.35 6.60 6.85 7.10 7.60 per dozen




Crucible steel blade, extra wide heel (1 inch wider than Philadelphia Pattern). Particularly adapted for use in Cement Work.

Post at right angle to blade, insuring proper balance.

	LEATHER (	GRIP HANDL	E	
10	101/4	11	111/4	12 inches
No. 110\$16.00	16.50	17.25	18.00	18.75 per dozen
	WOOD	HANDLE		
No. 109\$12.00	12.50	13.00	13.50	14.00 per dozen

### BRICK TROWELS

MANHATTAN, No. 30



Extra quality, wide heel, crucible steel blade. Carefully hardened and tempered; ground to a true and correct taper.

10% 111/ No. 30. Wood Handle . \$11.50 12.50 13.00 13.50 14.00 per dozen 12.00 No. 130. Leather Handle \$14.00 14.50 15.00 15.50 16.00 16.50

### NEW ENGLAND, No. 31



Trowel designed to meet a growing demand for a short, wide heel trowel. This trowel is 64 inches

I rowel designed to meet a growing demand for a short, wide heel trowel. Instrowel is by inches wide at the widest part of the heel, making it an extremely well-balanced tool. Each Disston Trowel is made of a single diamond-shaped piece of steel, from one end of which is forged the tang. The steel—Disston Crucielb Steel—is of a quality especially adapted for trowel blades, which are highly tempered, bevel ground, and possess a characteristic spring, giving greatest efficiency.

The post being made straight, or perpendicular to the blade, gives better balance in the working.

Made with either leather or wood handles; long, heavy ferrule, fastened to the tang in such a

manner that it will not work loose.

914 inches 11.50 per dozen 11.00 No. 131. Leather Handle......\$13.00 13.50 14.00

Made in the above lengths only

Packed half-dozen in box

Post at right angle to blade, insuring proper balance



Crucible steel blade

Crucible steel blade

317 4 417 5 517 inches

6½ inches x 3¾ inches. .\$9.50 per doz.

Packed half-dozen in box

### TROWELS

COKE, No. 80



COKE, No. 90



Packed half-dozen in box

# QUAKER CITY BRICK TROWEL, No. 100

RIVETED TANG




Packed one dozen in box

### **TROWELS**

### "STANDARD BRAND"

PLASTERING, BRICK AND POINTING

### PLASTERING, No. 150



10 10¼ 11 11¼ 12 inches \$6.50 7.00 + 7.50 8.00 9.00 per dozen

### BRICK

LONDON PATTERN, No. 151 PHILADELPHIA PATTERN, No. 152



### LONDON PATTERN, PER ILLUSTRATION, SENT UNLESS OTHERWISE SPECIFIED

	\$6.25	6.50	6.75	7.00	
	\$7.25	7.50	7.75	1117 8.00	
\$8.25	8.50	8.75	9.25	14 inches 9.50 per dozen	


### POINTING, No. 153

4	413	5	5/4	6 inches
\$2.95	3.00	3.10	3.20	3.40 per dozen

Packed half-dozen in box

### CANE KNIVES





No. 2. Length, including Handle, 21 inches; Length of Blade, 13 inches; Width of Blade at point, 43 inches; Thickness or Gauge, 16......\$8.00 per dozen Weight, 17 pounds per dozen



No. 9. Length, including Handle, 201 inches; Length of Blade, 111 inches; Width of Blade at point, 61 inches; Thickness or Gauge, 18. . . . . . \$6.50 per dozen Weight, 11 pounds per dozen






No. 16. Length, including Handle, 213 inches; Length of Blade, 125 inches; Width of Blade at point, 43 inches; Thickness or Gauge, 16......\$9.00 per dozen Weight, 203 pounds per dozen

Special patterns made to order

### CANE KNIVES



No. 110. Length, including Handle, 20 inches; Length of Blade, 13 inches; Width of Blade at point, 6 inches; Thickness or Gauge, 16 . . . . . . \$8.00 per dozen Weight, 21 pounds per dozen.



No. 90. Length, including Handle, 19½ inches; Length of Blade, 12½ inches; Width of Blade at point, 5½ inches; Thickness or Gauge, 17......\$8.00 per dozen Weight, 21 pounds per dozen.



No. 92. Length, including Handle, 20 inches; Length of Blade, 123 inches; Width of Blade at point, 5 inches; Thickness or Gauge, 16......\$9.00 per dozen Weight, 21 pounds per dozen



No. 93. Length, including Handle, 20 inches; Length of Blade, 123 inches; Width of Blade at point, 53 inches; Thickness or Gauge, 16......\$9.00 per dozen Weight, 21 pounds per dozen.

WE MANUFACTURE A COMPLETE LINE OF CANE KNIVES AND ARE PREPARED TO FURNISH SPECIAL PATTERNS ON ORDER. PRICE QUOTED ON RECEIPT OF SKETCH, GIVING FULL DESCRIPTION AND DIMENSIONS

### HENRY DISSTON & SONS

### **MACHETES**



No. 234. Wood Handle....Length over all, 28\frac{3}{4} inches......Blade, 24 inches Weight, 20 pounds per dozen



No. 274. Wood Handle....Length over all, 263 inches.......Blade, 22 inches Weight, 174 pounds per dozen



No. 374. Wood Handle....Length over all, 23 inches......Blade, 18 inches Weight, 13½ pounds per dozen

WHEN WRITING FOR ESTIMATE ON SPECIAL KNIVES, SEND SKETCH. GIVING FULL DESCRIPTION AND DIMENSIONS

### HEDGE KNIFE




No: 1. Length over all, 24½ inches.......Blade, 17 inches.......\$5.00 per dozen Weight, 15½ pounds per dozen

### CORN KNIFE



### CHAMPION HEDGE TRIMMER, No. 3



Crucible Steel Blade, hardened and tempered, handle of selected, well-seasoned ash, 2-inch Ferrule.

Length of Handle, with Ferrule, 207 inches; Blade, 193 inches. . . . \$14,00 per dozen Weight, 39 pounds per dozen.

### POST HOLE DIGGERS

Trade Mark Registered U. S. Pat. Off.



RAPID

Length, 59 inches..... \$24.00 per dozen "Samson" made with 6, 8, 10, 12-foot handles, special price

The handles of the "Samson" are made of Maplewood and the Rapid of Ash Wood, carefully selected, the blades of both are 9 inches long and made of solid steel, forged to shape.

These Diggers have been thoroughly tested and have given the greatest satisfaction to all who have used them. They work free and easy and are far superior to all plungers, augers and boring tools.

CLOSED

The Rapid can also be used as a transplanter.

The cuts on the left show the Diggers, with blades open, ready for plunging; those on the right showing how the dirt is grasped.

### DITCH BANK BLADES

DISSTON DITCH BANK BLADE

Designed for Cleaning Ditch Banks; Plantation work; Destroying Cherokee Hedges; Trimming Trees; Cleaning Railroad Rights of Way, etc Highest Grade Crucible Spring Steel Blade; Polished and Etched; Blade Extends into Handle and Rivered Over Meral Plane. Supplied with Plates and Rivets only; Handled-up, or Separate Handles.

Ditch Bank Blade, 211 ins. long; width, 71 ins.; length of cutting edge, 18 inches. . . . . \$25.00 per dozen 

# BEVEL, No. 3

Iron Stock, Nickel-plated, Flush Screw, Parallel Edges, Steel Blade. A slight turn of the thumb-screw operates unique mechanism for tightening or releasing blade.

Patented October 29, 1907

TRY SQUARE, No. 51/2



Iron Stock, Nickel-plated, Steel Blade, graduated to 1ths Square inside and out

No. 5: .....\$2.00 2.45 2.80 3.55 4.65 5.50 per dozen






Iron Stock, Nickel-plated, Steel Blade, graduated to hths Square inside and out

No. 11 \$3 25 3.65 4.55 5.00 5.50 6.00 7.00 per dozen

Packed half-dozen in box

### TRY SQUARE, No. 1




Graduated millimeters both sides, or millimeters one side inches on the other, without extra charge, when specially ordered

1


\$4.10

\$11.50

### BEVEL, No. 1




### MITRE SQUARE, No. 10



### TRY SOUARE, No. 15

41/4

\$7.25




Graduated aths, when specially ordered, at same price.

Trued inside and out. Made in the following lengths only:

No. 15..... 8.10 12.00 per dozen


> Length measured from inside of stock to end of blade Packed half-dozen in box.

### TRY SQUARE, No. 5



+	41/6	5	6	inches
No. 5. \$5 40	5 75	6.25	7 50	per o
7	71/4	8	9	inches
\$8.25	8.75	9.00	9.75	per o
10	12	!	14	inches
\$11.00	12.	75	17.00	per o

BEVEL, No. 5



217

per dozen

per dozen inches per dozen

### HENRY DISSTON & SONS

### **GAUGES**



No. 75.		Iron Thumb-screw, Steel Point			dozen
No. 76.	"	Oval Bar, marked with Inches, Steel Point	1.25	٠.,	**
No. 77.	**	Head Plated Oval Bar marked with Inches, Steel Point	2.50	**	**



Hardwood Polished, Head Plated, Oval Bar marked with Inches, Steel Point.

No. 771.		94.UU	per	dozer
No. 79.	Boxwood, Oval Bar, marked with Inches, Steel Point	4.20	**	**
No. 80.	" Head Plated, marked with Inches, Steel Point	5.25	"	**
No. 81.	Hardwood, Cutting, Steel Cutter			"
No. 82.				**
No. 84.	Boxwood " " " " " "	6.00	**	**



No. 841. Boxwood, Polished, Caralog, Head Plated, Oval Bar. Steel Cutter. . . . . . \$8.50 per dozen





No. 891. Boxwood, Polished, Mortise and Marking, Graduated Stem, Brass Slide and Thumb-screw S10.85 per dozen

Packed half-dozen in box.

### **GAUGES**







No. 93. Rosewood, Mortise, Screw Slide, Head and Stem Plated, Thumb-screw.... \$18.50 per dozen





Packed half-dozen in box

### **GAUGES**

DESIGNED ESPECIALLY FOR USE IN MANUAL TRAINING SCHOOLS



Made of hardwood; oval head, with brass screw; two brass strips inlaid in the face. Steel point. The oval shape of the head enables the user more easily to manipulate the gauge.



This gauge is similar to the 80½ gauge; hardwood; oval head, with brass screw; two brass strips inlaid in the face. The bar is **not** graduated. This cutter will not follow the grain of the wood, and insures accurate work.

No. 83.....\$6.90 per dozen
Packed half-dozen in box



### **HANDLES**

POLISHED, BORED AND SLOTTED (For Flat Blades)





### No. 1. STAMPED BRASS FERRULES

No. 2. SOLID BRASS FERRULES

No. 1	≴1.25	1.35	1.45	1.55	1.90	2.15	2.30 per dozen 1.70 "
No. 2	3	4		6	8	10	12 inches

Packed one dozen in box

### **FERRULES**

		SOLID BRASS,	POLISHED	
18	5/8	34	1∕8	1 inch
\$3.35	4.65	5.35	6.70	9.30 per gross
%-inch to	3-inch, assorted.			5.00 ° 's
र्-inch and	1 inch, assorted.			9.30 per gross 5.00 " 8.00 "
		Packed half-gr		

### HENRY DISSTON & SONS

### **SCREW DRIVERS**

Trade Mark Registered U. S. Patent Office "ELECTRIC"



Round Blade, Crucible Steel, carefully hardened and tempered, finished either No. 15 bright or No. 16 blued. Hardwood Handle.

Trade Mark Registered U. S. Patent Office

"TELEGRAPH"



Round Blade, Crucible Steel, carefully hardened and tempered, finished bright. Black Hardwood Handle, with Nickel-plated Ferrule.

2 3 4 5 6 7 8 10 12 mches No. 30. \$3.55 3.70 3.90 4.35 4.75 4.85 5.35 5.75 5.90 per dozen

No. 10. Same pattern and quality as "Telegraph," excepting Handle is "Rubberoid," with Nickel-plated Ferrule.

\$4.95 5.10 5.30 5.75 6.15 6.25 6.75 7.15 7.30 per dozen

### CABINET-MAKERS'



Round Blade, 13-inch diameter, Crucible Steel, carefully hardened and tempered, finished bright. Black Hardwood Handle.

No. 31. \$3.55 3.70 3 90 4.35 4.75 4.85 5.35 5.75 5.90 per dozen

The Tang of these Screw Drivers is driven in Handle, Rivet extends through Ferrule, Handle and Tang, and is headed on both ends, thus preventing the blade from turning in the socket, making a strong, durable driver.

Packed half-dozen in box

### SCREW DRIVERS

No. 9 THROUGH TANG, CAPPED END



Crucible Steel Blade, hardened and tempered, bright finish. Tang extends through handle, capped end. Handle, same shape as Telegraph Driver, with Rubberoid finish. Long heavy Steel Nickel-plated Ferrule. Rivet extends through Ferrule, Handle and Tang and is headed on both ends.

No. 9......\$5.70 6.65 7.75 9.15 10.30 11.45 13.75 15 50 per dozen

No. 38 THE STRONGEST DRIVER MADE



The No. 38 Screw driver will withstand the hardest work. The blade is made of Crucible Steel, specially Hardened and Tempered throughout. Handle of Hardwood, black finish. Long, heavy, Nickel-plated Ferrule.

The blade is fastened in the handle by a method which prevents its turning or coming loose.

Automobilists and others will particularly appreciate the strength of this screw driver.

No. 38......\$7.70 8.65 9.75 11 15 12 30 13.45 15.75 17.50 per dozen

Packed half-dozen in box



### MIDGET, No. 21

THE BLADE of the Midget Screw-Driver is manufactured from Disston-made Steel, specially hardened and tempered, and is ground sufficiently keen to fit the slot of a tiny screw. Ribs are pressed out from the tang of the blade, which prevents turning in the handle.

THE HANDLE is made from beechwood, neatly formed, covered with red shellar, and reinforced by a ferrule.


The Dieston Midget No. 21 Screw-Drivers are made in three sizes—1½, 2, and 3 inches. Four of each size a.e. arranged on an attractive eard, supported by an easel, which can be readily displayed on show-case, counters, and in windows.

Just the Screw-Driver one needs to fix Locks, Clocks, Door-knobs, Drawer-pulls, Typewriters, Light Fixtures, Sewing Machines, etc. Everybody's tool kit should contain at least one of them.

Price, Per Card. \$1.50

### SCREW DRIVERS

No. 20



Forged, round, Crucible Steel Blade, flat at butt. Hardwood Handle, ebonized, Nickel-plated Ferrule.

No. 20. \$2.65 3.25 3.90 4 55 5.25 6.50 7.25 9.60 10.50 per dozen





Flat Forged Blade, Flat Handle, Polished, Heavy Brass Ferrule.

No. 40. \$3.75 4.80 5.25 5.50 5.75 6.85 7.80 8.90 per dozen No. 41. Above pattern, with Apple Handle, Polished, Heavy Brass Ferrule, Highly Polished Blade.

4.00 5.25 5.70 6.85 8.00 9.10 \$3.50 5.95 10.75 per dozen Packed half-dozen in box

### **ELECTRICIAN, No. 95**

No. 95. . .\$1.90 2.00 2.15 2.30 2.50 per dozen Packed one dozen in box

### INSULATE, No. 50 PARTICULARLY ADAPTED FOR ELECTRICIANS' USE



Crucible Steel Blade, carefully hardened and tempered; is embedded in a hard Rubber Handle, so fastened that it will not work loose.

The solid rubber acts as insulation.

The Handle, hard rubber, is of a texture eliminating brittleness, strong, tough and durable, pressed to form, the grip is milled, and the extended rings prevent the hand from slipping or touching the blade.

This is a practical, high-grade screw-driver, beautifully finished.

Packed one in box

### HENRY DISSTON & SONS

### SHAFTING LEVEL

FOR USE OF MILLWRIGHTS AND MACHINISTS



Iron Stock, 6 inches, Nickel-plated, Proved Glass.....\$24.00 per dozen
"""Ground""
39.00""


Packed one in box

### POCKET LEVELS

No. 1



No. 150



Cherry Wood, Stained; Size, 12 inches by 17 inches by 7 inch. Nickel-plated Top Plate.

No. 200



18 to 24

÷

17.75

16.00 25.00

24 to 30

ž

## PLUMB AND LEVELS

CAREFULLY SELECTED, WELL-SEASONED HARDWOOD, SPECIAL PINISH

Disston Plumbs and Levels have achieved an enviable reputation for excellence in workmanship and design. They are all made of carefully air and kiln dried hardwood stock.

The removal of two small screws gives immediate access to the working parts. Loosen the lock screw, true up the bubble by turning the adjusting screw, then righten the lock screw—the job is done. This is a most simple arrangement to offset possible variations. The adjustment is solid when set and there are no springs to allow annoying inaccuracy. Moreover, this adjustment cannot rust fast, because the screws work directly into the wood. Levels for all uses. The Disston Plumb and Level Adjustment is the most simple and positive on the market.

Inches Per Dozen	Assorted 10 to 16 \$8.15	18 to 24 10.75
	No. 1. Level, Arch Top Plate, Two Side Views, Polished	2
	, Two Side Views,	3
	Level, Arch Top Plate,	No. 3. " " "
	<b>-</b> :	હ.
	ŝ	ģ



24 to 30	18 to 24
rted	J
wo Side Views, PolishedAsso	,
nd Level, Arch Top Plate, Two Side Views,	
te, Two S	:
Top Plan	
l, Arch	:
and Level	*
Plumb and	No. 09.
6	8
No. 9.	ŝ

Two Side Views, Tipped and Polished ...

ï :

;

Packed half-dozen assorted sizes in box

30.00

# MASONS' PLUMB AND LEVELS









N



Inches No. 105. A light, reversible level, made of well-seasoned Cherry, 23 inches wide, I inch thick. Fitted with six proved glasces (four plumh and two level), all adjustable Improved Disston Grip, ends protected with brass caps... Packed one-half dozen in box

Per dozen

# ADJUSTABLE PLUMB AND LEVELS



With the Disston Adjustable Plumb and Levels, the adjusting of two screws (A and B) will enable anyone to true up the bubble. The simplicity of this adjustment is one of the features that makes these levels appeal to mechanics. As the illustration shows, there are no springs to get out of order, In case of a broken glass the adjustment can be readily taken out and new glass inserted. nor will the screws rust in damp weather and interfere with the adjustment.

DIRECTIONS FOR ADJUSTING

To adjust the level, remove the protecting shield C; loosen star-head screw A, raise or lower round-head screw B until bubble is true; then tighten screw A. To adjust plumb, remove the protecting shield; loosen one screw and tighten the other until the bubble is true. For List of Adjustable Plumb and Levels, see following pages.

Digitized by Google

	ADJUSTABLE PLUMB AND LEVELS			
. 98 . 98	No. 90. Adjustable Plumb and Level, Arch Top Plate, Two Side Views, Polished. Assorted	1nches 24 to 30	Per Dozen \$21.30	H E
No. 15.	Adjustable Plumb and Level, Arch Top Plate, Two Brass Lipped Side Views, Polished. Assorted 26 to 30	26 to 30	24.00	N
				R
No. 16	NO	\ <u></u>		Y
				D
		Ì		IS
Vo. 16.	No. 16. Adjustable Plumb and Level, Arch Top Plate, Two Side Views, Solid Brass Ends, Polished.			S
	Assorted	26 to 30	28.50	T
Vo. 016.	No. 016. Similar to No. 16, made in four lengths only, each 2 inches wide, 1 inch thick.	12 to 18	22.50	0
40. 16 <u>4</u> .	No. 164. Adjustable Plumb and Level. Double Stock Cherry, Arch Top Plate, Two Side Views, Solid Ends, all Trimmings Nickel-plated, Polished. Assorted	26 to 30	29.65	N
No. 17.	Adjustable Plumb and Level, Arch Top Plate, Two Brass Lipped Side Views, Solid Brass Ends, Polished. Assorted	26 to 30 ·	31.30	&
No. 22.	Adjustable Triple Stock Plumb and Level, Arch Top Plate, Two Brass Lipped Side Views, Solid Brass Ends, Polished. Assorted	26 to 30	35.80	s o
No. 24.	Adjustable Plumb and Level, Arch Top Plate, Improved Duplex Side Views, Solid Brass Ends, Polished. Assorted	26 to 30	35.80	N S
	Packed half-dozen assorted sizes in box			

&

### ADJUSTABLE PLUMB AND LEVELS No. 25



No. 25. Adjustable Plumb and Level, Triple Stock. Arch Top Plate, Two Brass Lipped Side Views, Solid Brass Ends, Improved Duplex Side Views, Polished. Assorted......

\$54.00 Per Dozen

26 to 30

Inches

No. 0105



No. 0105. A light, Reversible Carpenter's Plumb and Level, 2½ inches wide, 1 inch thick. Cherry Stock, Natural Finish. Fitted with Six Proved Glasses (four plumb, two level), Adjustable. Brass Ends

Packed half-dozen assorted sizes in box

47.00

24 to 30

Assorted..

## PLUMB AND LEVELS

No. 28

Inches Per dones 18 to 24 \$30.00 Plumb and Level, Solid Cherry Stock, Natural Finish, Brass Top Plate, fastened with Brass Screws, Two Brass Lipped Side Views, Two Brass Lipped Plumb Views, both Plumb and Level-glasses proved and see in Brass Tubing. Level, Adjustable, Plumb, Nora-djustable. Assorted

Nos. 28 to 31 put up one level in neat pasteboard box

GRADUATING ATTACHMENT FOR USE ON PLUMB AND LEVEL

D

The Graduating Level is very useful in obtaining any degree or angle required. This improvement can be put into any of the Plumb and Levels in this list at \$14.00 per dozen extra.

280

NOTERIO

So. 38

61.50 per dozen

&

### DISSTON LEVEL GLASSES PROVED AND PLAIN



PROVED



Dissron Level Glaves are made in two styles—proved and plain. They are tube-shaped. The glass is clear, and strong enough for any usual purpose. They eightes earlightly curvel, so that when they are laid fail, the fights seeks its level and forms a bubble at the top-center of the glass. The glasses are seculefy seeled so that the lequal in them cannot once out or evaporate.

Near the centre of the proved glass are two lines, or marks, which encircle it. These marks are separated about the length of the bubble. When the level is placed so that the bubble rests immediately between the marks, the level is perfectly true. This feature of the Disston Level Glasses is quite a help to the mechanic in securing quickly and positively the position desired.

The plain glasses are similar to the marked glasses in every respect, with the exception of the marks.

34 inches 15.00 per gross 12.90 per gross 34 inches 18.15 per gross 24 inches to 34 inches. Assorted.... 14 inches to 2 inches. Assorted..... \$8.69 per gross 14 inches to 2 inches. \$11.40 | 11.40 | 11.40 | 11.40 PROVED LEVEL GLASSES ...........\$11.40 11.40 PLAIN LEVEL GLASSES...58,20

### No. 70 PLUMB AND LEVEL



Adjustable Mahogany Plumb and Level, Natural Finish, Full Brass Bound. Arch Top Plate, Two Side Views, Solid Brass Ends, Polished. All 12 lengths one inch thick, two inches wide. \$45.0

Adjustable Plumb and Level, same as No. 70, with Cherry Stock. Natural Finish \$38 00 No. 75.

Packed one in pasteboard box



Per Dozen \$21.50

No. 9. D. P. Plumb and Level, Solid Cherry Stock, Stained, Arch Top Plate, Two Side Views, Polished. Assorted ......

Inches

24 to 30

Per Dozen \$36.25

No. 16. D. P. Adjustable, Solid Cherry Stock, Stained, Arch Top Plate, Two Side Views, Solid Brass Ends, Polished. Assorted

Inches 26 to 30

Per Dozen

Inches

\$47.65

Packed half-dozen assorted sizes in box

26 to 30

D. P. Plumb and Level, Solid Cherry Stock, Natural Finish, Brass Top Plate, Brass Screws, Two Brass-lipped Side Views, Two Brass-lipped Plumb Views, Two Brass-lipped Plumb Views, Two Brass Tubing. Assorted.....

S

No. 36.

Double Plumb No. 16, D. P.

NOTSSIG

No. 30, D. P. 99,

### CABINET BURNISHERS

No. 1, OVAL



No. 0.	Oval—heavy	6"	long-i	Prices on a	pplicatio
No. 1.	Oval—light		.41" lor	ng \$3.35	per doze
No. 2.	Round		.43" "	3.35	. "
No. 3.	Square-round point, cut on all sides		.41" "	4.15	**
No. 4.	Square-round point, not cut.		.41" "	3.85	
No. 5.	Half Round		.43" "	4.15	**

### MAGNETO AND MIDGET MAGNETO FILES

Both the Magneto and Midget Magneto Files are made single or double cut. They are mounted one dozen Magnetos on a card, and two dozen Midget Magnetos on a card.

The Disston "Magneto" Files are real files, carefully made of High Grade Disston Steel. These files are cut accurately. They are hardened by the Disston process, and will not only file platinum points, but any other metal which needs a fine, smooth, accurate finish.



The Disston "Midget" Magneto Files have the same good qualities as all other Disston Files - efficiency, strength, durability. They are smaller in size than the regular magneto files, and are, therefore, easier to carry and less expensive. They are manufactured from Disston-made Steel.



Mounted on Colored Display Cards Holding One Dozen

PRICE ON APPLICATION

Mounted on Colored Display Cards
Holding Two Dozen

When ordering Magneto Files please specify whether they are to be on cards or in boxes; Regular Size, or Midget Size; Single or Double Cut. COMBINATION FILE CARD AND BRUSH

Patented Nov. 11 1913

Light Durable



The use of this Combination Card and Brush will keep the file in good condition. The Card is to be first used on file to loosen the filings, then cleaning with the brush.

File Card and Brush. \$7.50 per dozen File Card only . . . . . . \$6.50 per dozen

### EVERY FILE STAMPED

### DISSTON

IS WARRANTED AS PERFECT AS A FILE CAN BE MADE

### SLIM TAPER

TAPER

### ŠQUARE

### MILL

### FLAT BASTARD

### HALF ROUND

### ROUND

### HALF ROUND WOOD RASP

We manufacture a full line of the various kinds and sizes of Files. We have been making files since 1872.

They are made of Disston high quality Crucible Steel, carefully forged throughout, teeth well-formed, and hardened by our special process.
We use 35,000 dozen Disston Files annually in our own Works, therefore know what a good file should do and make Disston Files so they will do it.

### AMERICAN PRICE LIST-FILES AND RASPS

As Adopted by the File Manufacturers Association of the United States as their List Price per Dozen Effective on and after April 2, 1923.

### REVISED AND REPRINTED April 2, 1923

PRICE PER DOZ.

Note.—This price list comprises all of the kinds, sizes and cuts of files that will be regularly carried in stock. Anything differing from these files will be considered as special and will not be manufactured except in case of urgent necessity and when manufactured price will be based strictly upon cost of material and cost of manufacture at time goods are made.

INCH		MILL			MILL 1 R. E.		MILL 2 R. E.		MILL BLUNT		ROUND		
		Smooth	Bastard	2d Cut	Bastard	2d Cut	Bastard	2d Cut	Bastard'	2d Cut	Smooth		
3	3.00												
4	3.00	3.50								3.00	3.50	3.90	
5	3.20	3.80								3.20	3.80	4.10	
6	3.50	4.00	4.50	3.90	4.50	4.40	5.00	3.90	4.60	3.50	4.00	4.50	
7	3.90	4.60		4.40	5.20	4.90		4.30	4.90	3.90	4.60	4.90	
8	4.30	4.90	5.40	4.80	5.50	5.40	6.10	4.90	5.80	4.30	4.90	5.40	
9	4.90	5.80		5.50	6.50	6.10				4.90	5.80	6.30	
10	5.60	6.40	7.00	6.30	7.20	7.00	8.00	6.70	7.80	5.60	6.40	7.00	
12	7.50	8.60	9.40	8.40	9.70		10.80			7.50	8.60	9.40	
14	10.70	12.20	13.10	12.00						10.70	12.20	13.10	
16	14.70	16.80	17.90							14.70	16.80	17.90	
18	20.20	10.00								20.20	22.70	24.30	
20	20.20			1000000	P. Committee			1000		27.40			

INCH		FLAT			HAND :			SQUARE			THREE SQUARE		
	Bastard	2d Cut	Smooth	Bastard	2d Cut	Smooth	Bastard	2d Cut	2d Cut Smooth		2d Cut	Smooth	
4	3.70	4.30	4.70	3.70	4.30	4.80	3.80	4.60	4.90	4.80	5.60	6.10	
5	3.90	4.60	4.90	3.90	4.70	5.30	4.10	4.80	5.30	5.40	6.10	6.40	
6	4.30	4.80	5.30	4,30	5.10	5.60	4.60	5.10	5.50	6.10	6.70	7.10	
7	4.80	5.50	6.10	4.90	5.80	6.30	5.10	5.80	6.30	7.00	7.70	8.20	
8	5,30	6.10	6.60	5.40	6.30	6.70	5.50	6.30	7.00	7.50	8.30	8.90	
9	6.30	7.20	7.90	6.70	7.80	8.30							
10	7.00	8.10	8.70	7.50	8.70	9.40	7.40	8.50	9.10	9.10	10.10	10.70	
12	9.70	11.00	12.10	10.70	12.30	13.50	10.20	11.50	12.80	11.80	13.00	13.90	
14	13.30	15.30	16.70	15.00	17.00	18.20	13.90	16.10	17.50	15.50	17.00	18.30	
16	17.80	20.10	22,30	20,10	22.80	24.20	18.70	21.20	23.30	20.60	22.50	24.20	
18	23.90	26.80	29.20	26.80	29.90	31.50	25.10	28.20	30.40	27.50	29.90	32.00	
20	31.50			35.10			32.80						

INCH	НА	HALF ROUND		TAP	TAPERS		Extra Slim	Double Extra	Hand- Saw	BANI Blunt &	PITSAW	
	Bastard	2d Cut	Smooth	Sgl. Cut	Dbl. Cut	Tapers	Tapers	Tapers	Ollill Disset		Slim	
3				2.10		2.10						
31/2				2.10		2.10						
4	4.80	5.60	6.10	2.20	2.90	2.20	2.20	2.20	2.60	2.90		4.80
41/2	1000000			2.40	3.10	2.30	2.30	2.30	3.00	3.10		5.40
5	5.40	6.10	6.40	2.60	3.50	2.50	2.50	2.50	3.40	3.50		5.40
51/2				3.00		2.90	2.90	2.90				6.10
6	6.10		7.10	3.40	4.70	3.10	3.10	3.10	4.30	4.70	3.90	6.10
7	7.00	7.70	8.20	4.30	5.60	3.80	3.80	3.80	5.40	5.60		7.00
8	7.50	8.30	8.90	5.40	6.70	4.50	4.50	4.50	6.60	6.70	5.30	7.50
10	9.10	10.10	10.70	*8.10		6.40				9.70		
12	11.80	13.00	13.90	12.50		9.50						
14	15.50	17.00	18.30									
16	20.60	22.50	24.20		11111111							
18	27.50	29.90	32.00									

### AMERICAN PRICE LIST-FILES AND RASPS

(Continued)

As Adopted by the File Manufacturers Association of the United States, as their list price per dozen effective on and after April 2, 1923,

### REVISED AND REPRINTED April 2, 1923

PRICE PER DOZ.

INCH	V	VARDING			KNIFE		INCH		PILLAR			CANT
	Bastard	2d Cut	Smooth	Bastard	2d Cut	Smooth	mon	Bastard	2d Cut	Smooth	INCH	SAW
4	4.00	4.80	5.40		6.10	6.40	6	4.30	5.10	5.60	4	
6	4.50 4.90	5.30	5.80	6.10	6.70	7.10	8	5.40	6.30	6.70	5	4.7
8	6.40	7.50	8.20	8.50	7.50 9.10	7.90 9.50	10 12	10.70	8.70 12.30	9.40	6	5.4
10	8.70	10.10	11.00	10.10	11.50	12.30	14	15.00	12.50	13.50	7 8	6.1
12				13.70	15.20	16.10	16	20.10			10	8.7
											12	11.4

INCH	Cabinet Files		SPS	WOOD	F RD. RASPS	FLAT			AND	INCH	Handsaw Blunt	Double
		2d Cut	Smooth	Bastard	Smooth	Bastard	Smooth	2d Cut	Smooth	мон	Slim	Ender
6	8.10	10.10	11.70	8.10	10.10					4	2.50	
8	10.10	12.80	15.50	10.10	13.70	9.40	12.80			5	3.10	
10 12	13.70	17.50	20.70	13.70	18.70	12.80	17.50			6	3.80	
14	18.70 24.80	22.80	26.80	18.70	24.80	17.50	23.20	15.20	16.20	7		3.5
16	24.80	29.60	33.90	24.80	32.90	23.20	30.80	20.60	21.70	8	5.40	3.9
.10				32.90	43.60	30.80	40.90			9		4.4
										10		4.9
										12		6.0

INCH	Square Blunt Bastard	Round Blunt Bastard		FLOAT OD FILES	INCH	SHOE	RASPS	PLANER	CROSS CUT
	Dustard	Dastard	Flat	HIf. Rd.		Flat	Hlf. Rd.	KNIFE	
6			4.80	7.00	6				
8	7.40	5.60	6.30	8.50	7				6.10
10	10.20	7.50	8.60	10.70	8	10.10	10.10		
12	13.90	10.70	11.80	14.10	0	12.20	12.20	6.40	7.50
14	18.70	14.70	16.00	18.50	10	13.70	13.70		8.50
16	25.10		21.50	24.70	12	13.70	13.70	8.60	9.10
18	32.80		21.00	24.70	12				11.80

INCH	но	RSE RASPS, P	LAIN		HORSE RASPS	, TANGED
	34 File	Stim	34 File	Regular	Slim	Thin
12 13	12.80			16.80 19.60		1.531"x .270" 16.00
14	17.80			23.10	13" stock 21.90	1.594"x .275" 18.20 1.750"x .280" 21.90
15	20.90			27.30	13" stock 25.20	1.750"x .280" 21.90 1.812"x .285" 25.20
16 18	24.40	14" stock		32.20	14" stock 29.70	1.875"x .290" 29.70
20	32.90	15" stock 16" stock	25.90 32.90			

The above kinds, sizes and cuts of files are regularly carried in stock. Anything differing from these files will be considered as special and will not be manufactured except in case of urgent necessity and when manufactured price will be based strictly upon cost of material and cost of manufacture at time goods are made.

### SUPERFINE FILES

LIST OF APRIL 1, 1919

PRICE PER DOZEN
Sizes and Cuts Principally Called For Are Indicated On this List by Black Faced Type

INCH		НА	ND			PII	LLAR		P	ILLAR	NARRO	w	PILLA	R EXT	RA NAF	ROW
INCH	00-0	1-2	3-4	6	00-0	1-2	3-4	6	00-0	1-2	3-4	6	00-0	1-2	3-4	6
2 1/4 3 3 1/4 5 6 8 10 12 14	\$2.40 2.60 2.95 3.45 5.00 6.60 8.70 11.40	2.50 2.75 3.25 3.85 5.45 7.45 10.05 13.40	2.70 3.05 3.65 4.45 6.15 8.40 11.15 14.70	3.00 3.70 4.55 5.40 7.35 9.80 12.90 17.00	1.80 1.80 1.90 2.00 2.95 4.20 5.80	2.00 2.00 2.00 2.00 2.00 2.10 2.25 3.25 4.55 6.15	2.20 2.20 2.20 2.20 2.35 2.65 3.70 5.10 7.00	2.65 2.65 2.65 2.65 2.90 3.30 4.45 6.00 8.00	\$1.75 1.75 1.75 1.75 1.85 1.95 2.70 3.70 4.90	1.95 1.95 1.95 1.95 2.05 2.15 3.05 4.25 5.70	2.20 2.20 2.20 2.20 2.30 2.40 3.50 5.05 7.15	2.60 2.60 2.60 2.60 2.70 2.90 4.30 6.35 9.50	\$1.95 1.95 1.95 2.00 2.60 3.50 4.70	2.00 2.00 2.10 2.25 2.90 4.00 5.70	2.20 2.20 2.40 2.70 3.40 4.80 7.30	2.55 2.80 3.10 4.25 6.15 9.40
		INC	HES				21/2	3	31/2	4	5	6	8	10	12	14
of an in	idth in Decimal parts   HAND   PILLAR   Of an inch stated as   PILLAR NARROW   PILLAR NARROW   PILLAR EX. PILLAR EX. PILLAR EX.   PILLAR EX.					.26	.43 .29 .22 .14	.32	.53 .35 .27 .18	.62 .42 .31 .21	.72 .48 .36 .24	.90 .60 .45 .30	1.09 .73 .55 .36	1.27 .85 .64 .42	1.45	

Pillar, Pillar Narrow, and Pillar Extra Narrow, with one or both edges cut, take same List Price as with two safe edges. Other regular widths not listed take regular list prices.

INCH		squ	ARE		ROUND				HALF ROUND				CRO	SSING		
INCH	00-0	1-2	3-4	6	00-0	1-2	3-4	6	00-0	1-2	3-4	6	00-0	1-2	3-4	6
2½ 3 3½ 4	\$2.45 2.45 2.50 2.55	2.50 2.50 2.65 2.70	2.60 2.60 2.90 3.15	2.70 3.05 3.40	\$1.80 1.80 1.90 1.95	1.90 1.90 2.00 2.10	2.05 2.05 2.20 2.30	2.30 2.30 2.45 2.60	\$3.20 3.20 3.40 3.65	3.60 3.60 3.95 4.30	4.20 4.20 4.55 4.90	5.25 5.80 6.30	\$3.80 3.80 4.05	4.15 4.15 4.50	4.70 4.70 5.25	5.55 5.55 6.30
6	2.80 3.20	3.15 3.60	3.80 4.55	4.25 5.30	2.30 2.80	2.50 3.05	2.70 3.30	3.00 3.55	3.90 4.20 4.85	4.65 5.00 5.80	5.30 5.70 6.65	6.90 7.50 8.70	4.50 5.40	5.10 6.10	6.00	7.40 8.85
8 10	3.95 5.00 6.30	4.75 6.10 8.00	6.15 8.00 10.15	7.60 10.00 12.50	4.00 5.30 7.10	4.30 5.95 8.00	4.60 6.70 9.70	5.00 7.75 11.95	5.70 6.75 9.35 12.50	7.80 10.35 13.30	7.70 9.00 11.80 15.05	9.90 11.10 13.80 18.30	7.80 10.50	8.60 11.65 15.00	9.70 13.00 17.00	11.90 15.50 20.00

INCH		KM	NIFE			BAR	RETTE			EQUALING				WARD	DING	
mon	00-0	1-2	3-4	6	00-0	1-2	3-4	6	00-0	1-2	3-4	6	00-0	1-2	3-4	6
3 3 4 4 5 6 8 0	\$2.80 3.00 3.40 3.95 5.60	3.40 3.40 3.95 4.70 6.60	3.40 4.00 4.80 5.80 8.25	4.90 6.00 7.30 11.10	\$3.70 3.80 3.90 4.10 4.45 5.85	3.80 3.90 3.95 4.20 4.55 6.00	3.90 4.00 4.10 4.35 4.75 6.25	4.05 4.15 4.25 4.55 5.05 6.65	\$2.25 2.35 2.50 2.80 3.75	2.45 2.60 2.85 3.20 4.30	2.70 2.95 3.35 3.85 5.25	3.10 3.55 4.05 4.70 6.40	\$1.95 2.25 2.70 3.20 4.45 5.90	2.00 2.55 3.10 3.75 5.15 6.75	2.30 2.90 3.60 4.35 6.20 8.25	2.65 3.40 4.25 5.20 7.40 9.85

INCH	T	HREE S	QUARE		METAL SAW			CROCHET			ROUND STRAIGHT				CANT		
inon	00-0	1-2	3-4	6	0	1-2	3-4	00-0	1-2	3-4	00-0	2	4	00-0	2	4	
3 1/3 4 5 6 8 0	\$2.75 2.75 2.75 2.95 3.25 4.35 5.85	2.95 2.95 2.95 3.15 3.50 4.70 6.30	3.25 3.25 3.25 3.50 3.95 5.30 7.20	3.75 3.75 3.75 4.05 4.55 6.10 8.30	\$2.75 2.75 2.75 2.75 2.95 3.25 4.35	2.95 2.95 2.95 3.15 3.50 4.70	3.25 3.25 3.25 3.50 3.95 5.30	6.00 7.95	3.70 4.60 5.45 6.40 8.45 10.70	4.20 5.00 5.90 6.85 9.00 11.30	1.80 2.30 3.00 4.80	2.00 2.60 3.40 5.30	2 20 2.90 3.80 5.80	\$4.60 4.75 5.00 5.45	5.20 5.35 5.65 6.15	6.05 6.25 6.60 7.10	

INCH		SLITTING	3		PIPPIN		Joint Round Edge	Joint Square Edge						
	00-0	2	4	0	1-2	4	0-2	0-2	INCHES	3	4	5	6	8
3 4 5 6	4.25 5.30 6.50	5.40 6.40 7.65	6.50 7.50 8.75	\$3.55 4.30 6.00 7.95	3.70 4.60 6.40 8.45	4.20 5.00 6.85 9.00	\$2.15 2.40 2.85 3.40 4.80	\$1.75 2.00 2.60 3.25 4.55	Thickness of { Thin Drill or Joint { Thick	.02	.04	.06	.08	.10

The absenting sizes and cuts of files are regularly carried in stock. Anything differing from these files will be considered as a special we shall not be manufactured except in case of urgent necessity and when manufactured price will be based strictly upon cost of material and cost of manufacture at time goods are made.

### SUPERFINE FILES

LIST OF APRIL 1, 1919

PRICE PER IMPEN

ROUND HAN	DLE N		E FILE	ES .		NDLE NEEDLE OR ESC FILES—CUTS 0-2-4-6	APE-
Inches	-4	43/4	51/2	61/4	Inches		51/2
Round	\$1.50	1.60	1.65	1.75	Round		\$1.70
Half Round	1.75	2.15	2.55	2.85	Half Round		2.30
Flat		1.90	2.30	2.55	Flat		2.60
Oval		2.05	2.25	2.45	Oval		-2.30
Knife	2.05	2.35	2.70	3.15			2.90
Square		2.00	2.15	2.30			2.10
Thr. Sqr	1.90	2.20	2.60	3.10	Thr. Sar		2.45
Equaling		2.10		2.65			2.45
Barrette		1.90		2.35			2.15
Joint		1.65		1.75			2.20
Slitting		2.65		3.30			2.70
Marking	1.75	1.85		2.05	Half Round Blu	int	2.35
Assorted	1.80	2.05		2.50			2.35
DIE SINKER'S CUTS 0-					MACHINE UTS 00-0-2	BENCH FILING MAC FILES—CUTS 00-0	
Inch	31	2	Inches		5	Inches 31/4x1/8	31/4×1/4
Inch	-	2					


Inch	31/2	Inches	5
Round	\$2.30	Round	2.50
Half Round	3.15	Half Round	4.50
Flat	2.50	Pillar	2.05
Oval	3.35	Oval	4.85
Knife	3,65	Knife	3.65
Square	2.50	Square	.2.10
Three Square	2.65	Three Square	3.15
Flat 2 R. E	3.50	Crochet	5.30
Flat 1 S. E	2.30	Equaling	2.70
Oval 1 S. E	3.35	Pippin	5.30
Lozenge	4.15	Lozenge	5.30
Auriform	4.55	Cant	4.25
Assorted		Assorted	3.90

Round.... \$1.80 1.90 Half Round . . . . 3.20 3.90 2.50 3.00 Pillar..... 3.50 Oval..... 2.80 4.10 Knife ...... 3 20 3.00 2.90 3.80 4.50 3.40 Crochet ..... Equaling..... 3.30 4.30 3.20 4.00 Pippin..... 3.50 4.70 Lozenge.... 3.20 4.10 3.80

Put up in dozens, either assorted (one of each kind) or in kinds. Assorted dozens will always be sent when order does not state otherwise.

Screw Head with or without Tang, 3"..... \$2.85 | Broach, Gauge 40 to 65.............

The above kinds, sizes and cuts of files are regularly carried in stock. Anything differing from these files will be considered as special and will not be manufactured except in case of urgent necessity and when manufactured price will be based strictly upon cost of martiarial and cost of manufacture at time



We have a separate department thoroughly equipped for the manufacture of Super-fine Files of all shapes and sizes known to the trade, and being hardened by our special process, we guarantee them equal, or superior to others of either foreign or domestic manufacture.

### HENRY DISSTON & SONS

### **INDEX**

PAGE	1
Adjustable Set Gauge114	Circu
American Saw Co. Patterns	Ins
Circular Saws	Ins
Anvils	Ins
" Serting Cross-cut Saws	Ins
Auckland Pattern Cross-cut Saws106, 107	Ins
Back Saws142-144	Ins
Back Saws for Metal184	Mi
Handles for	Re
Band Saws56-58	Set
Band Saws for Metal58	Sol
Filing Machine for59	Sol
Flexible Back	Sol
Leveling Blocks for	Th
Mohawk Guide	Clam
Setting Machine for	Clam
Side File for	Coke
Swages for	Comb
Barrel Stave Saws	Comb
Beef Splitter Saws	Comp
Bevels	Ha
Bilge Saw	Conc
Borthwick Sharpening Machine	Cona
Braze Finishing Clamp	Copir
Brazing Clamp for Band Saws	Corn
Brazing Tongs	Cross
Brazing Torch	An
Brick Trowels 199-209	Au
Burnishers, Cabinet	Ha
Butcher Block Scrapers	On
Butchers' Saws	Pa
Blades for	Re
Handles for	Tri
Butting Saws	Cross
Cabinet Burnishers	Curri
Cabinet Pattern Webs	Cylin
Cabinet Saws	Cylin
Cabinet Saw Frame	Deal
Cabinet Scrapers	De-h
Canadian Webs	Discs
Cane Knives 210, 211	1
	Ditch
Cementers' Trowels	Doct
Chamfering Saws38	Dove
Champion Saw Setting Tool74	Drag
Chisel Teeth and Holders10	Eccer
Chisel Teeth, Machine for Sharpening21	Eccer
Chisel Tooth Circular Saws	Edge
Chisel Tooth Groovers	Edgir
Chisel Tooth Wrench	Emer
Circular Knives	Emer
Oncome achieves	L

	PAGE
Circular Saws	
Inserted Tooth	10-24
Inserted Tooth Cross-cut Saws	22
Inserted Tooth Cut-off Saw	
Inserted Tooth for Metal	
Inserted Tooth Ice Saw	24
Instructions for Ordering	9
Mitre	32, 33
Repairing	
Setting Machine for	75
Solid Tooth	
Solid Tooth, for Metal	
Solid Tooth, for Slate	48
Thin Rim Circular Saw	33
Clamps for Saws when Brazing	78, 79
Clamps for Saws when Filing	118-121
Coke Trowels	208
Combination Hand Saws	
Combination Saw-Circular	
Compass Saws and Blades	146-150
Handles for	
Concave Saws	37
Conqueror Swages	
Coping Saws	
Corn Knives	
Cross-cut Saws	
Anvil and Hammer for Setting	
Auckland, Jarrah, Tasmanian	
Handles and Tabs for	
One-Man	
Pacific Coast	
Repairing	
Triumph or Narrow	
Cross-cut Saw Tools	
Currier Blades	
Cylinder Saws	
Cylinder Saw Gummer	
Deal Saws	
De-horning Saws	
Discs for Cold Metal	
Ditch Bank Blades	
Doctor Blades	
Dovetail Saws	
Drag Saws	
Eccentric Swage for Band Saws	
Eccentric Swage for Circular Saws	
Edger Saws	27
Edging Trowels	198
Emery Wheels	
Emery Wheel Gummer, Borthwick	67

### HENRY DISSTON & SONS

### INDEX—Continued

abat
Fay Webs124
Felloe Webs
Ferrules
Files
P1 C 1 - 1 D - 1
File Card and Brush
Side Files
Filing Guides and Clamps120. 121
Filing Machine for Narrow Band Saws59
Flanges30
Flooring Saw141
Friction Discs
Furtock Saws
Gang Saws
Gauge Saw
Gauges, Carpenters' Marking218-220
Tension
Wire121, 122
Gauges of Saws, Standard7
Gin Roller Blades126
Grooving Saws
Chisel Tooth Grooving Saw
Gummers, Cutters and Grinder 63-67
Gummer-Cylinder Saw
Hack Saw Blades
Frames184-189
Hack Saw, Hand Saw Pattern
Half-Rack Bench Saw
Hammers
Handles, Back, Butcher
Compass, Hand Saw
Cross-cut Saw
Screw Driver
Tiller and Box Handles85
Hand, Panel and Rip Saws127-140
Hand Hack Saw184
Hand Ice Saws
Hand Saw Jointer
Hand Screw Press
Hand Shear
Handy Hand Saw
Handy Kit
Heading Saws
Hedge Knife
Hedge Knife         212           Hedge Shears         161
Hedge Knife       212         Hedge Shears       161         Hedge Trimmer       212
Hedge Knife       212         Hedge Shears       161         Hedge Trimmer       212         High-speed Steel Milling Saws       46, 47
Hedge Knife       212         Hedge Shears       161         Hedge Trimmer       212         High-speed Steel Milling Saws       46, 47
Hedge Knife         212           Hedge Shears         161           Hedge Trimmer         212           High-speed Steel Milling Saws         46, 47           Ice Saws         24, 86, 87           Ice Saws Inserted Tooth         24
Hedge Knife

	PAGE
Joiner Saws	151
Jointer for Hand Saws	117
Keyhole Saws and Blades 14	8-150
Keystone Grooving Saws	35. 36
Kitchen Saws	
Knives, Cane, Corn, Hedge21	
Circular, for Cork, Cloth, Leather, Pape	- 30
Machine	
Saw Knife, Mincing Knife	
Lap Filing Vise	
Lathe Saws	
Levels	
Glasses for	231
Pocket	224
Shafting	224
Leveling Blocks for Band Saws	80
Lock Corner Cutters	
Long Saws, Repairing	
Machetes	
Machine Knives	
Magneto and Midget Magneto Files	
Mandrels	
Masons' Levels22	
Masons' Mitre Rods	197
Metal Cutting Saws—Band	
Circular	42-53
Hand18	34-192
Metal Slitting Saws	
Midget Saw Punch	
Mill Saws	82
Milling Saws for Metal42-47,	49-54
Milling Saws, High-speed Steel	
Milling Saws, Inserted Tooth	
Mincing Knives	181
Mitre-Box Saws	143
Mitre Rods, Masons'	197
Mitre Saws, Circular	32, 33
Mitre Saws, Circular	6, 217
Mohawk Band Saw Guide	57
Mulay Saws	82
Nest of Saws	18, 149
One-Man Cross-cut Saws	
Patternmakers' Saws	161
Pit Saws and Tiller Handles	131
Plastering Trowels	
Plumb and Levels	5-212
Plumbers' Saws	£ 149
Pocket Levels	
Pointing Trowels	
Pond Ice Saws	86
Pork Packers' Saws	180
Post-hole Diggers	213

### **INDEX**—Continued

Precise Saw Tooth Sharpening Machine	5
Press, Hand Screw	6
Pruning and Table Saws	155-16
Hook and Saw	
Saw and Knife	
Punch, Midget Saw	
Rail Hack Saw Frames and Blades	10
Removable Back Saw	13
Repairing, Circular Saws	
Cross-cut Saws	10
Inserted Tooth Saws	1
Segment Saws	3
Resaws	
Rift Saws	10
Right and Left-hand Saws	
Rods, for Web Saws	
Rods, for Wood Saws	160
Saw Clamps and Filing Guides	118, 121
Saw Knives	101
Saw-sets 74, 76, 80,	111-118
Saw Screws	163
Scrapers, Butcher Block	101
Scrapers, Cabinet	157
Scrapers, Wall	101
Screw Drivers.	
ocrew Drivers	221-223
Handles and Ferrules	220
Screw Press.	68
Screw Slotting Saws	42, 188
Screws, Saw	163
Scroll Saws, Fay's	124
Segment Saws	31
Semi-high Speed Steel Milling Saws	47
Set Gauge for Cross-cut Saws	114
Set Gauge for Shingle Saws, Etc	75
Setting Machine for Narrow Rand Same	50
Sets, Saw	11-118
Sets, Saw	76
Shafting Level	274
Shaper, Swage	71
Sharpening Machines	. 59. 67
Shear for I rimming	20
Shears, Hedge Shingle and Heading Saws	161
Shingle and Heading Saws	. 29, 30
Ship-carpenters' Saws	172
oide Files	77
Siding Saws	27
Siding Saws. Slate Saws, Circular.	48
outting daws for Metal	43 46
Solder for Brazing Band Saws.	56
Speed Indicator	62
opring Saw Sere	39
Spring Saw Sets	6 217
	0, 21/

Spuds, Tobacco	PAGE
Squares, Try and Bevel214	
Square-hole Saws	1-21
C'- D. '11 . 10	148
Stair Builders' Saws	151
Standard Number of Teeth	8
Standard Teeth and Gauge	2
Star Saw-set	111
Stave Saws	
C1	40
Steel	6
Straight Edges	78
Swages	9-74
Swage Bars and Hammer	. 76
Swage Shaper Tabs for Cross-cut Saws.	71
Tabs for Cross-cur Sawe	110
Leeth Dunlicate	^ 21
Teeth, Standard Number of	U, ZI
Teeth, Standard Shapes	••••
Terms	
Terms Thin Rim Circular Saws	1
Trin Kim Circular Saws	33
Tiller and Box Handles	85
Tobacco Spuds	.160
Lools and Springs, Etc.	39
I ools for Fitting Cross-cut Saws	. 114
Tools for Refitting Drag Saws	.111
Tools for Repairing Saws 76-79, 111	_115
Trade Marks	-113
Turning Webs.	124
Trowels Brick and Pointing 100	200
Trowels, Brick and Pointing 199	_200
Trowels, Brick and Pointing 199	_200
Trowels, Brick and Pointing	-209 . 198 . 208
Trowels, Brick and Pointing	-209 . 198 . 208
Trowels, Brick and Pointing	-209 .198 .208 .207
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick Cross Joint. Garden, Gauging. Painters' Cement.	-209 .198 .208 .207 .200
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Conter, Circle. 193	-209 . 198 . 208 . 207 . 200 . 198 -197
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193 "Standard Brand"	-209 .198 .208 .207 .200 .198 -197
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193 "Standard Brand" Tile Setters.	-209 .198 .208 .207 .200 .198 -197 .209
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193 "Standard Brand" Tile Setters. Try Squares. 214	-209 .198 .208 .207 .200 .198 -197 .209 .207
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193 "Standard Brand" Tile Setters. Try Squares. 214	-209 .198 .208 .207 .200 .198 -197 .209 .207
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Garden, Gauging. Painters' Cement Plastering, Corner, Circle. 193 "Standard Brand" Try Squares Try Squares 214 Turkish Saw Tools	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193 "Standard Brand" Tile Setters. Try Squares. 214 Turkish Saw. Universal Cross-cut Saw Tools.	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering. Corner, Circle. 193. "Standard Brand". Tile Setters. Try Squares. 214 Turkish Saw Universal Cross-cut Saw Tools. Veneering Saws. Veneering Saws.	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wabble Saws Wall Scrapers	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wabble Saws Wall Scrapers	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wabble Saws Wall Scrapers	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wabble Saws Wall Scrapers	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wabble Saws Wall Scrapers Warranty Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair 123	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114 31 34
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193. "Standard Brand" Tile Setters. Try Squares. 214 Turkish Saw Universal Cross-cut Saw Tools. Veneering Saws. Wall Scrapers. Warranty. Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair. 123- Web Saw Frames.	-209 . 198 . 208 . 207 . 200 . 198 -197 . 209 . 207 -217 . 151 . 114 34 
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wall Scrapers Warranty Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair 123 Web Saw Frames Web Saw Frames Web Saw Frames	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114 34 .181 5
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193. "Standard Brand". Tile Setters. Try Squares. 214 Turkish Saw Universal Cross-cut Saw Tools. Veneering Saws. Wall Scrapers. Wable Saws Wall Scrapers. Warranty. Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair. 123 Web Saw Rods. Web Saw Rods. Web Saw Rods.	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 34 34 5
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging. Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters. Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools. Veneering Saws. Wabble Saws Wabble Saws Warnty. Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair 123 Web Saw Frames. Web Saw Frames. Web Saw Rods. Whip Saws. Whip Saws. Wire Gauges 121.	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 31 5 -125 .175 .166 .85
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193. "Standard Brand" Tile Setters. Try Squares. 214 Turkish Saw. Universal Cross-cut Saw Tools. Veneering Saws. Wall Scrapers. Wabble Saws. Wall Scrapers. Warsanty. Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair. 123- Web Saw Frames. Web Saw Rods. Whip Saws. Wire Gauges. 121, Wood Saws. 167-	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114 .31 .34 .181 5
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging. Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws. Walble Saws. Walble Saws. Wall Scrapers Warranty. Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair Turning or Chair Web Saw Rods Whip Saws. Web Saw Rods Whip Saws. Were Gauges 121, Wood Saws 167- Blades for 164- Blades for 168-	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 .114 3 .181 5
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Universal Cross-cut Saw Tools Veneering Saws Wabble Saws Wabble Saws Warranty. Webs, Cabinet, Canadian, Fay, Felloe, Turning or Chair 123 Web Saw Frames Web Saw Rods Whip Saws Whip Saws Wire Gauges 121, Wood Saws 167 Blades for 164, Boys' Buck Saws	-209 .198 .208 .207 .200 .198 -197 .209 .207 -217 .151 34 5 5 5 5 5 5 
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193. "Standard Brand". Tile Setterp. Try Squares. 214 Turkish Saw Universal Cross-cut Saw Tools. Veneering Saws. Wall Scrapers. Wabble Saws. Wall Scrapers. Web, Cabinet, Canadian, Fay, Felloe, Turning or Chair. 123- Web Saw Rods. Whip Saws. Wire Gauges. 121, Wood Saws. Wire Gauges. 121, Wood Saws. Blades for 164, Boys' Buck Saws Bucks.	-209 .198 .208 .207 .200 .198 -197 .209 .207 .151 .114 .31 .34 .181 5 .125 .175 .166 .85 .122 .174 .165 .175
Trowels, Brick and Pointing. 199 Cementers' Edging Coke, Quaker City Brick Cross Joint Garden, Gauging Painters' Cement Plastering, Corner, Circle 193 "Standard Brand" Tile Setters Try Squares 214 Turkish Saw Veneering Saws Wabble Saws Wabble Saws Wabble Saws Warning or Chair Web, Cabinet, Canadian, Fay, Felloe, Turning or Chair Turning or Chair 123- Web Saw Frames Web Saw Rods Whip Saws Whip Saws Wire Gauges 121, Wood Saws 167- Blades for Boys' Buck Saws Boys' Buck Saws Bucks Frames	-209 198 -208 -207 -200 198 -197 -207 -217 -151 -14 -31 -34 -181 -5 -125 -175 -166 -85 -85 -174 -174 -175
Trowels, Brick and Pointing. 199 Cementers' Edging. Coke, Quaker City Brick. Cross Joint. Garden, Gauging. Painters' Cement. Plastering, Corner, Circle. 193. "Standard Brand". Tile Setterp. Try Squares. 214 Turkish Saw Universal Cross-cut Saw Tools. Veneering Saws. Wall Scrapers. Wabble Saws. Wall Scrapers. Web, Cabinet, Canadian, Fay, Felloe, Turning or Chair. 123- Web Saw Rods. Whip Saws. Wire Gauges. 121, Wood Saws. Wire Gauges. 121, Wood Saws. Blades for 164, Boys' Buck Saws Bucks.	-209 198 -208 -207 -200 198 -197 -207 -217 -151 -14 -31 -34 -181 -5 -125 -175 -166 -85 -85 -174 -174 -175