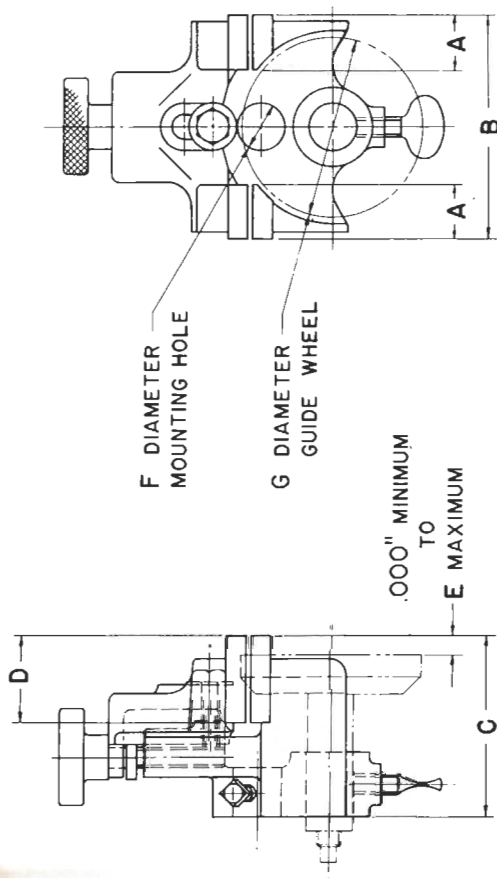
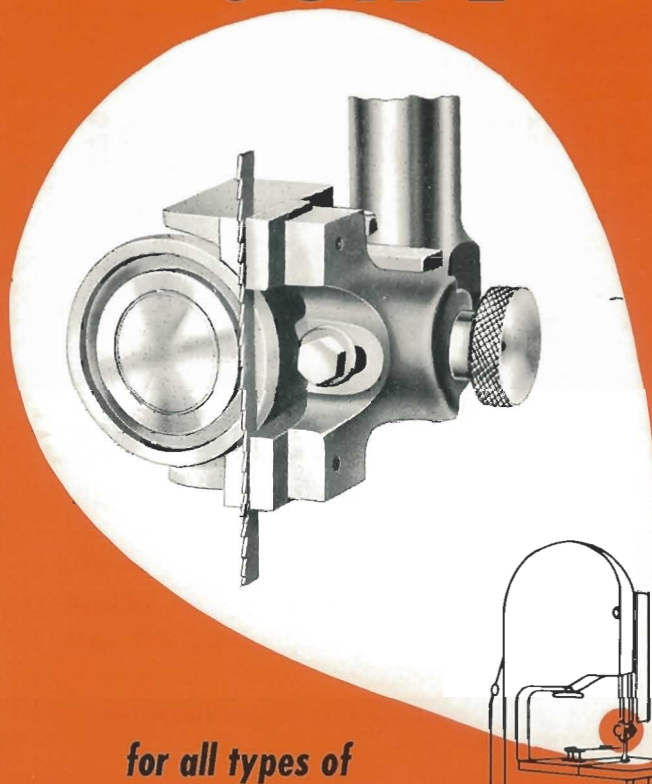


WRIGHT BAND SAW GUIDES

The WRIGHT BAND SAW GUIDE



| SIZE | A | B | C | D | E | F | G | WHEEL | WIDTH SAW | SIZE JAW |
|------|-------|-------|---------|--------|--------|------|---------|--------------------|-----------|-----------------------|
| 0 | 3/4 | 3 | 2 3/8 | 1 1/4 | 1 1/8 | 9/16 | 1 15/16 | BALL BEAR. | 1 1/4 | 1 1/4 x 3/4 x 1 1/4 |
| 1 | 7/8 | 3 1/2 | 2 13/16 | 1 3/8 | 1 1/4 | 3/4 | 2 13/16 | BALL BEAR. PLAIN " | 1 1/2 | 5/16 x 7/8 x 1 3/8 |
| 2 | 1 1/8 | 4 1/8 | 3 13/16 | 2 3/16 | 2 3/16 | 3/4 | 2 13/16 | PLAIN BEAR. | 1 1/2 | 5/16 x 1 1/8 x 2 3/16 |
| 2 | 1 1/8 | 4 1/8 | 3 13/16 | 2 3/16 | 2 3/16 | 3/4 | 2 13/16 | BALL BEAR. | 1 1/2 | 5/16 x 1 1/8 x 2 3/16 |



for all types of
COMMERCIAL BAND SAWS



Manufactured by:

BLACK DIAMOND SAW & MACHINE WORKS,





Distrib

Jasper Parts Inc.
16096 SW Wilsonville Rd.
Wilsonville OR 97070
(503) 236-0905

**Black
Diamond**

BLACK DIAMOND SAW & MACHINE WORKS

Natick, Massachusetts 01760

No. 00**No. 0****No. 1****No. 2**

THE WRIGHT BAND SAW GUIDE

- Prolongs Life of Band Saw
- Frictionless, Free-running
- Simple to Lubricate
- Meets all Saw Requirements


Standard equipment on many industrial band saws today, the Wright Guide protects and extends the life of your saw blades. Virtually frictionless for maximum protection to saw blade, the guide uses replaceable, hardened steel jaws,* is dustless and simple to lubricate. The guide is available in 4 sizes (shown above) to meet all industrial band saw specifications.

***NEW!** Tungsten Carbide Jaws now available for extra long life.

BALL BEARING GUIDE WHEELS

- Eliminates Wear and Tear
- Special Ball Bearing Design
- For WRIGHT or Other Guides

Key component of the WRIGHT Band Saw Guide (described left) is this precision-designed guide wheel . . . also adaptable to improve any other similar saw guide. By vastly reducing friction at points of contact of the saw blade, the wheel eliminates wear and tear, and resulting saw blade breakage. Available in 3 standard sizes (see below) for the Wright or similar type guide.



| COMPLETE BAND SAW GUIDES | | REPLACEMENT GUIDE WHEELS | | | MOUNTING STUD |
|--------------------------|--|--------------------------|------------|--------------|------------------------|
| GUIDE NO. | DESCRIPTION | Wheel O.D. | Shank Dia. | Shank Length | |
| #00 | Special Guide for small machines. For saws 1/8" to 1/2" sizes. | 1 3/4" | 3/8" | — | — |
| #0 | Lower Guide for saws 1/8" to 1 1/4". Also Upper Guide for small machines. | 1 15/16" | 3/4" | 1 3/4" | 3/4" x 3" 3/4" x 6" |
| #1 | For saws 1/8" to 1 1/2". | 2 7/8" | 3/4" | 2" | 3/4" x 6" |
| #2 | For saws 1 1/8" to 2 1/2". | Use No. 1 Wheel | | | 3/4" x 6" |
| | For saws 1/4" to 2 1/2". | Not avail. | | | |